



CUSTOMER NAME _____

PROJECT NAME _____

DATE _____ TYPE _____

CATALOG NUMBER _____

E2SD Security Light

LED Roadway Lighting

The Evolve® LED Security Light provides energy efficiency in a rugged, easy to install light-weight fixture. New LED refractive optics provide high-efficacy application-optimized photometry. Type III Medium, Type V and Type V Wide distributions offered at 2700K, 3000K and 4000K CCT.

Construction

Housing:	Aluminum diecast enclosure with integral heatsink for maximum heat transfer.
Lens:	Impact resistant acrylic refractor array. Optional Drop Lens
Paint:	Corrosion resistant Gray powder paint, ≥2.0 mil thickness
Weight:	<6.0 lbs (2.7 kgs)

Optical System

Lumens:	3,270 - 10,500
Distribution:	Type III Medium Type V Type V Wide
Efficacy:	137 - 169 LPW (4000K)
CCT:	2700K, 3000K & 4000K
CRI:	≥ 70

Electrical

Input Voltage:	120-277V
Input Frequency:	50/60Hz
Power Factor:	≥ 0.9 at rated watts
Total Harmonic Distortion:	≤ 20% at rated watts

Surge Protection

Standard	Optional
<input type="checkbox"/> 10kv/5kA	<input type="checkbox"/> Secondary 10kV/5kA (R Option)

Lumen Maintenance

Projected Lxx per IES TM-21-11 at 25°C

LUMENS	DISTRIBUTION	LXX(10K) @ HOURS		
		25,000 HR	50,000 HR	60,000 HR
04 ,05, 06, 07, 08	C1, V1, VW	98	96	95
09,10	C1, V1, VW	95	90	88

NOTES: Projected Lxx based on LM-80 (≥12,000 hour testing). Accepted industry tolerances apply to initial luminous flux and lumen maintenance measurements.

Ratings

Operating Temperature:	04 to 09 lumen Code -40°C to 50°C 10 lumen Code -40°C to 45°C
Vibration:	3G per ANSI C136.31-2018
LM-79:	Tested in accordance with IES Standards
EMI:	Title 47 CFR Part 15 Class A
RoHS:	Complies with the material restrictions of RoHS

Controls

Dimming:	Standard - 0-10V Optional - DALI (Option U)
Sensors:	Photo Electric Sensors (PE) available LightGrid+ Compatible

Warranty

Standard	Optional
<input type="checkbox"/> 5 Year (Standard)	<input type="checkbox"/> 10 Year (Optional)



CUSTOMER NAME

PROJECT NAME

DATE

TYPE

CATALOG NUMBER

Ordering Information

E 2 S D 0

PROD. ID	VOLTAGE	LUMENS	DISTRIBUTION	REFRACTOR	CCT	CONTROLS	MOUNTING	POWER LEADS	FINISH	MOUNTING
E = Evolve 2SD = Security Light	0 = 120-277	04 = 4,000 05 = 5,000 06 = 6,000 07 = 7,000 08 = 8,000 09 = 9,000 10 = 10,000 ¹	C1 = Type III V1 = Type V VW = Type V Wide	N = None (Zero uplight) R = Drop Lens	27 = 2700K 30 = 3000K 40 = 4000K	A = ANSI 136.41 7-Pin Receptacle D = ANSI 136.41 7-Pin Receptacle with Shorting Cap E = ANSI 136.41 7-Pin Receptacle with Long Life Non Dimming PE Box	N = None L = Long 24 in. bracket	N = None 3 = 3 ft # 14 AWG Leads 5 = 5 ft # 14 AWG Leads 8 = 8 ft # 14 AWG Leads	Gray	L = Tool-Less Entry R = 10kV/5kA Secondary SPD U = DALI Programmable XXX = TBD Special

Note 1: Max Ambient = 45°C

Suggested HID Replacement

- Approximately 4,000 - 10,000 lumens to replace 50-100W HPS Cobra-head.

Note: Actual replacement lumens may vary based upon mounting height, pole spacing, design criteria, etc.

The information above is designed to provide a guideline to select the correct luminaire for a roadway application. The best and most accurate way to ensure the proper design is by doing a lighting layout.

CUSTOMER NAME _____

PROJECT NAME _____

DATE _____

TYPE _____

CATALOG NUMBER _____

No Drop Lens

LUMEN	DIST	DIST CLASS	LUMEN OUTPUT (NO DROP LENS)				TYP. SYSTEM WATTS	BUG RATINGS (NO DROP LENS)		
CODE	CODE	RP-8 TYPE	2700K	3000K	4000K	LPW	120-277V	2700K	3000K	4000K
RATIOS			0.88	0.97	REF	4000K	REF			
04	C1	Type III Medium	3520	3880	4000	160	25	B1-U0-G1	B1-U0-G1	B1-U0-G1
	V1	Type V	3690	4070	4200	168	25	B2-U0-G1	B2-U0-G1	B2-U0-G1
	VW	Type V Wide	3660	4030	4160	166	25	B2-U0-G1	B2-U0-G1	B2-U0-G1
05	C1	Type III Medium	4400	4850	5000	161	31	B1-U0-G1	B1-U0-G1	B1-U0-G1
	V1	Type V	4620	5090	5250	169	31	B2-U0-G1	B2-U0-G1	B2-U0-G1
	VW	Type V Wide	4576	5040	5200	168	31	B3-U0-G1	B3-U0-G1	B3-U0-G1
06	C1	Type III Medium	5280	5820	6000	154	39	B1-U0-G1	B1-U0-G2	B1-U0-G2
	V1	Type V	5540	6110	6300	162	39	B2-U0-G1	B2-U0-G1	B2-U0-G1
	VW	Type V Wide	5490	6050	6240	160	39	B3-U0-G1	B3-U0-G1	B3-U0-G1
07	C1	Type III Medium	6160	6790	7000	156	45	B2-U0-G2	B2-U0-G2	B2-U0-G2
	V1	Type V	6460	7120	7350	163	45	B2-U0-G1	B2-U0-G1	B2-U0-G1
	VW	Type V Wide	6406	7060	7280	162	45	B3-U0-G1	B3-U0-G1	B3-U0-G1
08	C1	Type III Medium	7040	7760	8000	154	52	B2-U0-G2	B2-U0-G2	B2-U0-G2
	V1	Type V	7390	8140	8400	162	52	B2-U0-G1	B3-U0-G1	B3-U0-G1
	VW	Type V Wide	7320	8070	8320	160	52	B3-U0-G1	B3-U0-G2	B3-U0-G2
09	C1	Type III Medium	7920	8730	9000	153	59	B2-U0-G2	B2-U0-G2	B2-U0-G2
	V1	Type V	8310	9160	9450	160	59	B3-U0-G1	B3-U0-G1	B3-U0-G1
	VW	Type V Wide	8236	9070	9360	159	59	B3-U0-G2	B3-U0-G2	B3-U0-G2
10	C1	Type III Medium	8800	9700	10000	147	68	B2-U0-G2	B2-U0-G2	B2-U0-G2
	V1	Type V	9240	10180	10500	154	68	B3-U0-G1	B3-U0-G1	B3-U0-G1
	VW	Type V Wide	9150	10080	10400	153	68	B3-U0-G2	B3-U0-G2	B3-U0-G2

With Drop Lens

LUMEN	DIST	DIST CLASS	LUMEN OUTPUT (WITH DROP LENS)				TYP. SYSTEM WATTS	BUG RATINGS (WITH DROP LENS)		
CODE	CODE	RP-8 TYPE	2700K	3000K	4000K	LPW	120-277V	2700K	3000K	4000K
RATIOS			0.88	0.97	REF	4000K	REF			
04	C1	Type III Medium	3270	3600	3720	149	25	B1-U3-G2	B2-U3-G2	B2-U3-G2
	V1	Type V	3730	3780	3900	156	25	B2-U3-G1	B2-U3-G1	B2-U3-G2
	VW	Type V Wide	3400	3750	3860	154	25	B2-U3-G2	B2-U3-G2	B2-U3-G2
05	C1	Type III Medium	4090	4510	4650	150	31	B2-U3-G2	B2-U3-G2	B2-U3-G2
	V1	Type V	4290	4730	4880	157	31	B2-U3-G2	B2-U3-G2	B2-U3-G2
	VW	Type V Wide	4250	4690	4830	156	31	B2-U3-G2	B2-U3-G2	B2-U3-G2
06	C1	Type III Medium	4910	5410	5580	143	39	B2-U3-G2	B2-U3-G2	B2-U3-G2
	V1	Type V	5150	5680	5850	150	39	B2-U3-G2	B2-U3-G2	B2-U3-G2
	VW	Type V Wide	5100	5620	5800	149	39	B2-U3-G2	B3-U3-G2	B3-U3-G2
07	C1	Type III Medium	5720	6310	6510	145	45	B2-U3-G2	B2-U3-G3	B2-U3-G3
	V1	Type V	6010	6630	6830	152	45	B2-U3-G2	B2-U3-G2	B2-U3-G2
	VW	Type V Wide	5950	6560	6770	150	45	B3-U3-G2	B3-U3-G3	B3-U3-G3
08	C1	Type III Medium	6540	7210	7440	143	52	B2-U3-G3	B3-U3-G3	B3-U3-G3
	V1	Type V	6870	7570	7812	150	52	B2-U3-G2	B3-U3-G2	B3-U3-G2
	VW	Type V Wide	6800	7500	7730	149	52	B3-U3-G3	B3-U3-G3	B3-U3-G3
09	C1	Type III Medium	7360	8110	8370	142	59	B3-U3-G3	B3-U3-G3	B3-U3-G3
	V1	Type V	7730	8520	8789	149	59	B3-U3-G2	B3-U3-G2	B3-U3-G3
	VW	Type V Wide	7660	8440	8700	147	59	B3-U3-G3	B3-U3-G3	B3-U3-G3
10	C1	Type III Medium	8180	9020	9300	137	68	B3-U3-G3	B3-U3-G3	B3-U3-G3
	V1	Type V	8590	9470	9760	144	68	B3-U3-G2	B3-U3-G3	B3-U3-G3
	VW	Type V Wide	8510	9380	9670	142	68	B3-U3-G3	B3-U3-G3	B3-U3-G3

Photometric Plots


E2SD

Type III Medium - No Drop Lens


10,000 Lumens

4000K

E2SD_10C1N40_IES

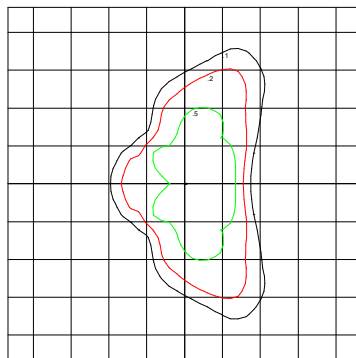

Grid Distance in Units
of Mounting Height at 30'
Initial Footcandle Values at Grade

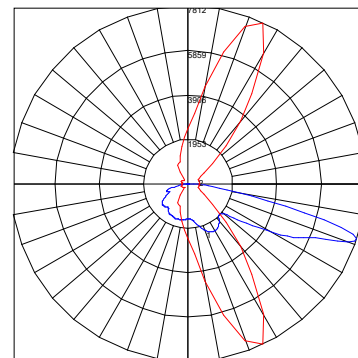

— Vertical Plane at Max CD Horizontal Angle
— Horizontal Cone at Max CD Vertical Angle


E2SD

Type V - No Drop Lens


10,000 Lumens

4000K

E2SD_10V1N40_IES

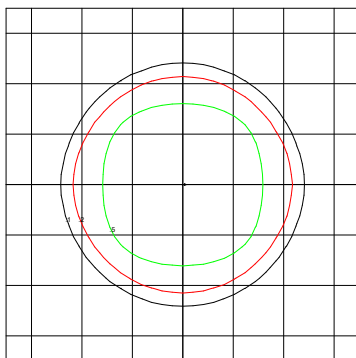

Grid Distance in Units
of Mounting Height at 30'
Initial Footcandle Values at Grade

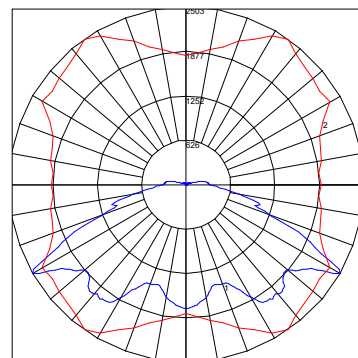

— Vertical Plane at Max CD Horizontal Angle
— Horizontal Cone at Max CD Vertical Angle


E2SD

Type V Wide - No Drops Lens


10,000 Lumens

4000K

E2SD_10VWN40_IES

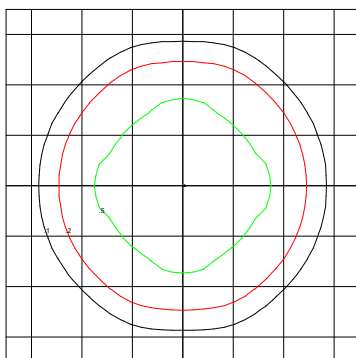

Grid Distance in Units
of Mounting Height at 30'
Initial Footcandle Values at Grade

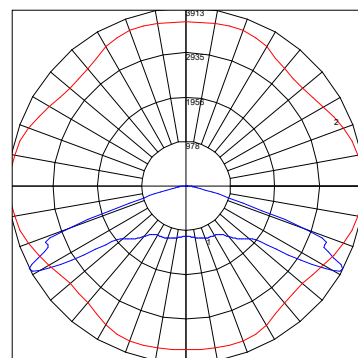

— Vertical Plane at Max CD Horizontal Angle
— Horizontal Cone at Max CD Vertical Angle

Photometric Plots


E2SD

Type III Medium - w/ Drop Lens


10,000 Lumens

4000K

E2SD_10C1R40_...IES

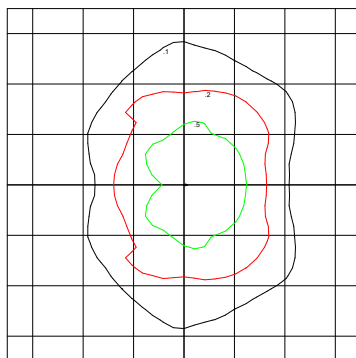

Grid Distance in Units
of Mounting Height at 30'
Initial Footcandle Values at Grade

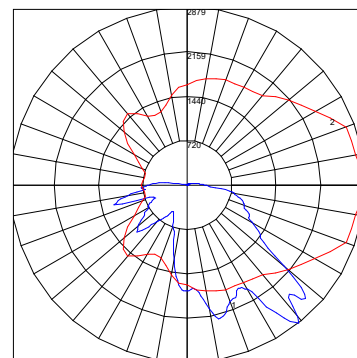

— Vertical Plane at Max CD Horizontal Angle
— Horizontal Cone at Max CD Vertical Angle


E2SD

Type V - w/ Drop Lens


10,000 Lumens

4000K

E2SD_10V1R40_...IES

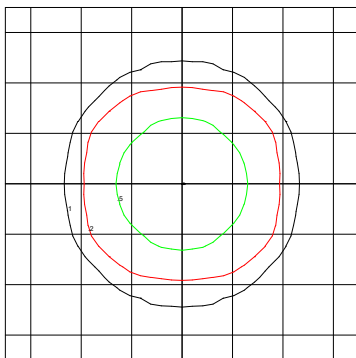

Grid Distance in Units
of Mounting Height at 30'
Initial Footcandle Values at Grade

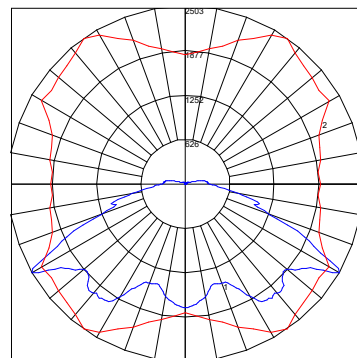

— Vertical Plane at Max CD Horizontal Angle
— Horizontal Cone at Max CD Vertical Angle


E2SD

Type V Wide - w/ Drops Lens


10,000 Lumens

4000K

E2SD_10VWR40_...IES

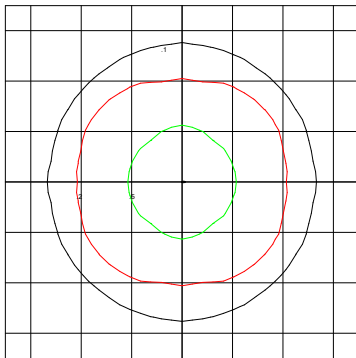

Grid Distance in Units
of Mounting Height at 30'
Initial Footcandle Values at Grade

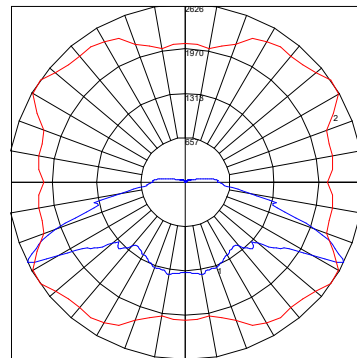

— Vertical Plane at Max CD Horizontal Angle
— Horizontal Cone at Max CD Vertical Angle

CUSTOMER NAME


PROJECT NAME

DATE

TYPE

CATALOG NUMBER

Dimensions

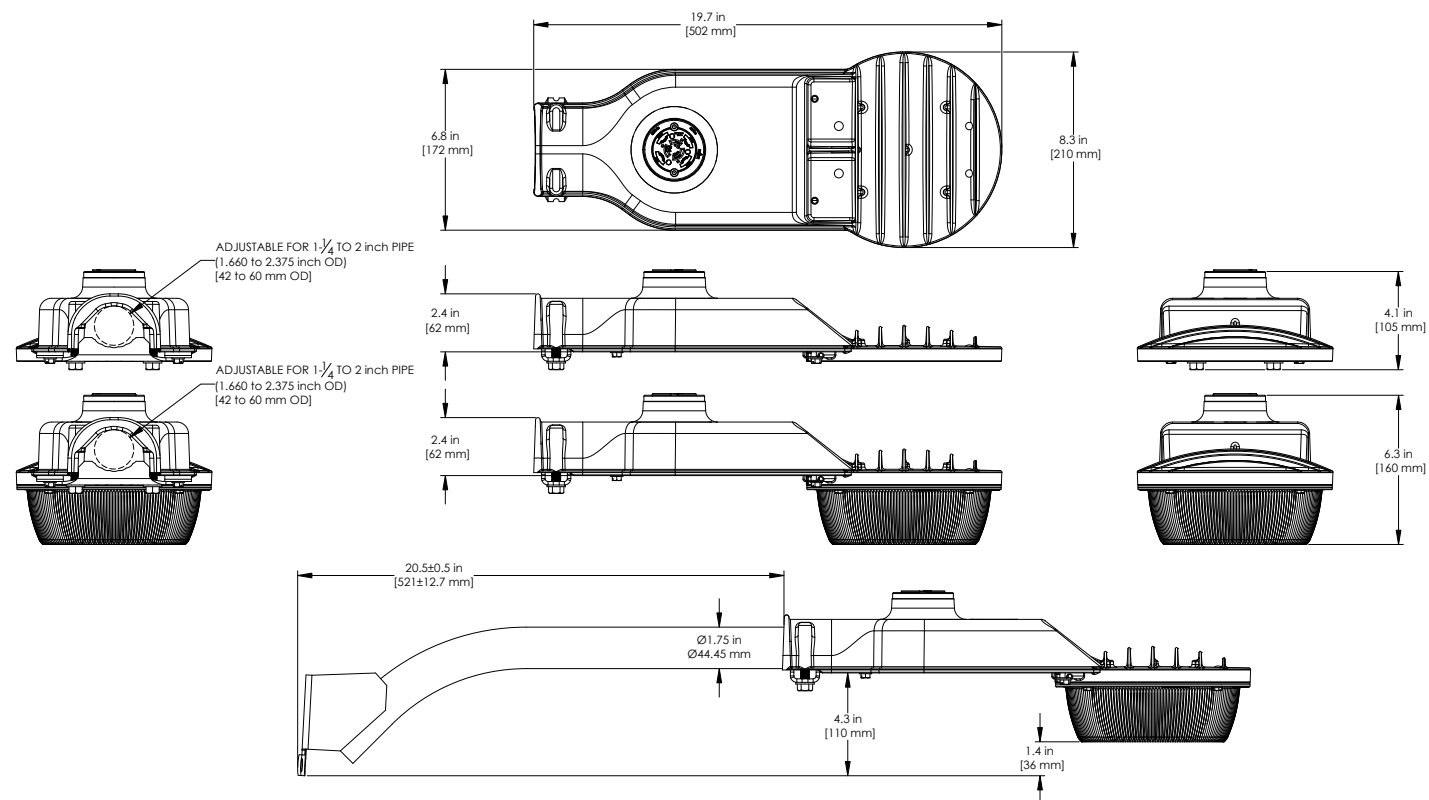

Mounting

- Adjustable for 1.25 to 2 in. nominal mounting pipe
- Integral diecast mounting pipe stop
- Slipfitter with +/- 5 degrees of leveling adjustment

Effective Projected Area

- Effective Projected Area: 0.15 ft2 (0.014 m2) (Max no shield)

Weight


- Approximate net weight: <6.0 lbs (2.7 kgs)

Accessories

SAP Number	Part Number	Description
93313797	ELS-E2SD-120-020-GRAY	E2SD Shield 120° Rectangular, 2", Gray
93313798	ELS-E2SD-120-020-BLCK	E2SD Shield 120° Rectangular, 2", Black
93029238G	PED-MV-LED-7	ANSI C136.41 Dimming PE, 120-277V
28299	PECOTL	Standard 3-Pin PE 120-277V
73251	SCCL-PECTL	Shorting Cap

Network Lighting Controls

DESCRIPTION



Current's **LightGrid+**™ Outdoor Lighting Control System is designed for Street and Roadway Applications. It enables remote monitoring, control, and asset management of a single fixture or a group of fixtures through a web enabled Central Management System.

CUSTOMER NAME

PROJECT NAME

DATE

TYPE

CATALOG NUMBER

ELSX/E2SD – 2.5in/120 degree

PRODUCT CODE	DESCRIPTION
93319588	ELSX-E2SD-25120-BLCK
93319589	ELSX-E2SD-25120-GRAY
House Side Shield  120° Back Position 2.5 inch	Street Side Shield  120° Front Position 2.5 inch
Side Shield Right  120° Right Position 2.5 inch	Side Shield Left  120° Left Position 2.5 inch





ELSX/E2SD – 2.5in/180 degree

PRODUCT CODE	DESCRIPTION
93319592	ELSX-E2SD-25180-BLCK
93319593	ELSX-E2SD-25180-GRAY
House Side Shield  180° Back Position 2.5 inch	Street Side Shield  180° Front Position 2.5 inch
Side Shield Right  180° Right Position 2.5 inch	Side Shield Left  180° Left Position 2.5 inch

ELSX/E2SD – 5.0in/120 degree

PRODUCT CODE	DESCRIPTION
93319590	ELSX-E2SD-50120-BLCK
93319591	ELSX-E2SD-50120-GRAY
House Side Shield  120° Back Position 5 inch	Street Side Shield  120° Front Position 5 inch
Side Shield Right  120° Right Position 5 inch	Side Shield Left  120° Left Position 5 inch

ELSX/E2SD – 5.0in/180 degree

PRODUCT CODE	DESCRIPTION
93319594	ELSX-E2SD-50180-BLCK
93319595	ELSX-E2SD-50180-GRAY
House Side Shield  180° Back Position 5 inch	Street Side Shield  180° Front Position 5 inch
Side Shield Right  180° Right Position 5 inch	Side Shield Left  180° Left Position 5 inch