



LED Lamps - Plug-in



Type B 2-Pin Plug-in Lamps


Type B Plug-in lamps provide an easy solution to leverage the low energy and long life of LED. The existing fixture is wired to bypass the ballast, which further reduces energy use and eliminates the need to check ballast compatibility. Type B Plug-ins also present a long-term replacement lamp option when compact fluorescents and CFL ballasts become unavailable.

PERFORMANCE HIGHLIGHTS:

Type B 2-Pin Plug-in Lamps	
Light Output Range:	500 - 1,850 Lumens
CRI:	80
CCT:	Various, Selectable on some models
Input Voltage:	120-277; 120-347 on some models
Efficiency:	Up to 105 LPW
Wattage:	5W - 18W
Life:	Up to 50,000 hours L70
Temperature Rating:	-20°C to 40°C
Location Rating:	Damp

LIMITED WARRANTY

5 years



Available on some models:
Select color temperature using built-in switch.

FEATURES:

- Operate from 120-277 or 120-347VAC input voltage
- Fit in existing CFL sockets
- Selectable color temperature available on some models
- Directional light output can provide improved fixture efficiency
- Last up to 4x longer than CFL
- These lamps are energy efficient, contain no lead or mercury and are compliant with material restriction requirements of RoHS

BENEFITS:

Energy + Cost Savings

- For example, using only 10.5 watts of energy, save over \$90 in energy costs over the rated life of the lamp versus a standard 26-watt compact fluorescent lamp operated on a ballast based on \$0.11 per kWh
- Eliminate the need for ballasts and provide long-term lamp replacement options
- G24 2-pin lamps work in 2-pin G24d and 4-pin G24q sockets
- Selectable color temperature allows flexibility to match color with fewer SKUs

LEARN MORE:

To learn more about saving money and energy, go to www.LED.com.



Selectable **LED Lamps**

Do more with less.

- *Reduce Inventory*
- *Simplify Projects*
- *Optimize Solutions*



LED Lamps - Plug-in

Type B 2-Pin Plug-in Lamps



CUSTOMER NAME

PROJECT NAME


DATE

NOTES


Lamp Drawings and Base Identification (not drawn to scale)

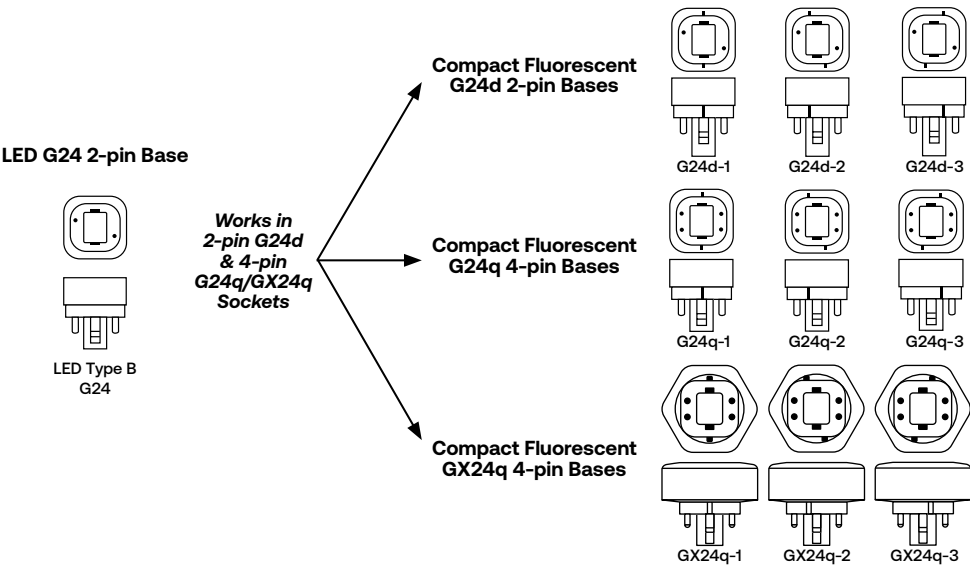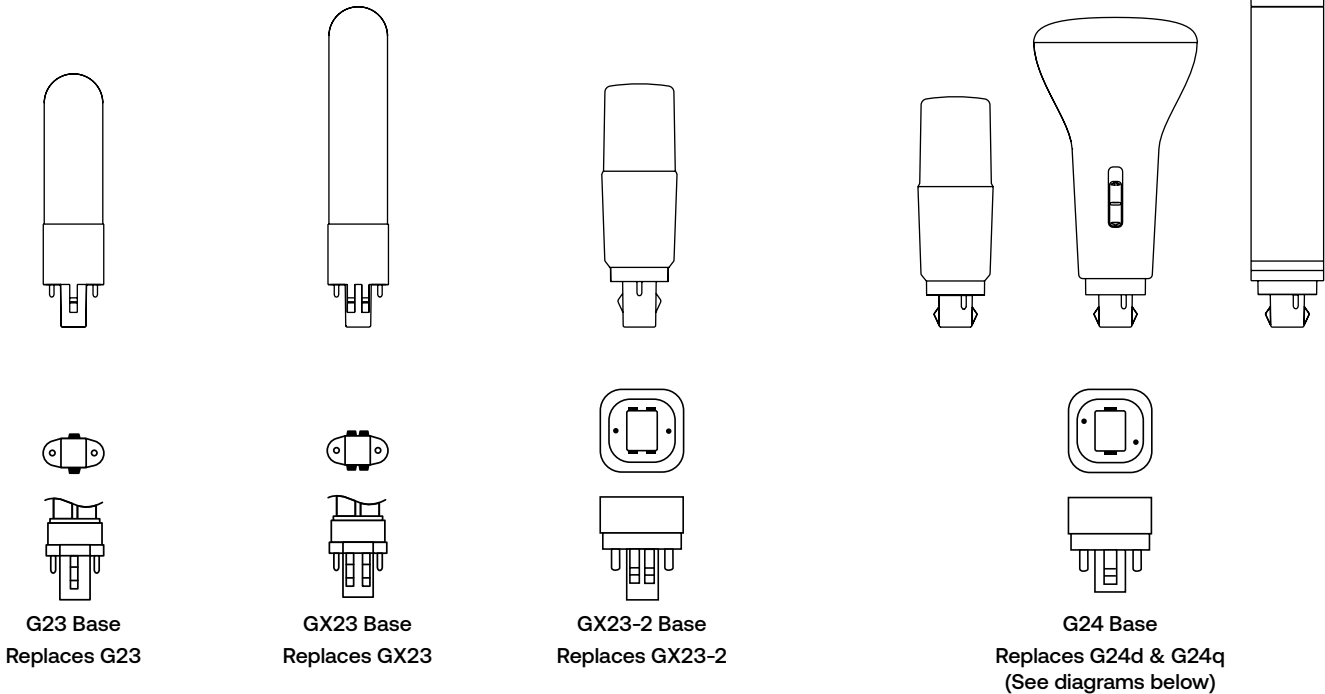

Wiring Diagram for G24d 2-pin Sockets

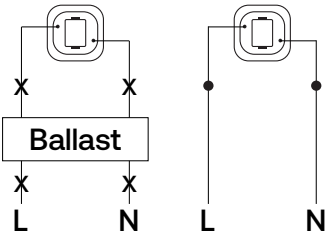

Wiring Diagram for G24q/GX24q 4-pin Sockets

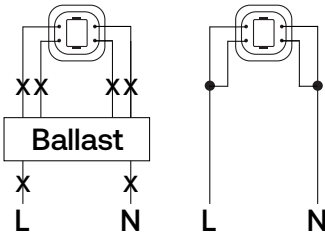



LED Lamps - Plug-in

Type B 2-Pin Plug-in Lamps

CUSTOMER NAME _____

PROJECT NAME _____

DATE _____

NOTES _____

LED Lamps – Type B Plug-ins

Type B LED plug-in lamps offer the opportunity to replace pin-based compact fluorescent lamps and eliminate costs related to the ballasts. Type B lamps operate from mains voltage. The fixture is re-wired to bypass the ballast. Horizontal and vertical orientation lamps are offered in order to minimize energy consumption and improve fixture efficiency. Choose the lamp orientation that suits the application.

Type B Plug-in Product Family Table



Base	G23	GX23	GX23-2	G24	G24	G24	G24
Fits In Sockets	G23	GX23	GX23-2	G24d G24q GX24q	G24d G24q GX24q	G24d G24q GX24q	G24d G24q GX24q
Input Voltage	120-277	120-277	120-277	120-277	120-277	120-347	120-347
Color Temperature	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	SpectraChoice™ 2700K 3000K 3500K 4000K	SpectraChoice™ 2700K 3000K 3500K 4000K
Rated Life (L70)	50,000	50,000	20,000	20,000	50,000	50,000	50,000
Lumens	500	500	800	850	1200	1100	1850
Light Distribution	Directional	Directional	Omnidirectional	Omnidirectional	Omnidirectional	Directional	Directional
Wattage	5W	5W	7.5W	7.5W	10W	10.5W	18W
CFL Equivalent	7/9W	13W	13W	13W	18W	13/18/26W	32/42W



LED Lamps - Plug-in

Type B 2-Pin Plug-in Lamps

CUSTOMER NAME _____

PROJECT NAME _____

DATE _____

NOTES _____

LED Lamps – SpectraChoice™ Type B Plug-ins

SpectraChoice™ Type B Plug-in lamps feature built-in switches to select color temperature. Horizontal and vertical orientation lamps are offered in order to minimize energy consumption and improve fixture efficiency. Choose the lamp orientation that suits the application.




SpectraChoice™




G24 Type B plug-in
bases can be used in
a variety of sockets



Heat sink for thermal
managment enables
long life

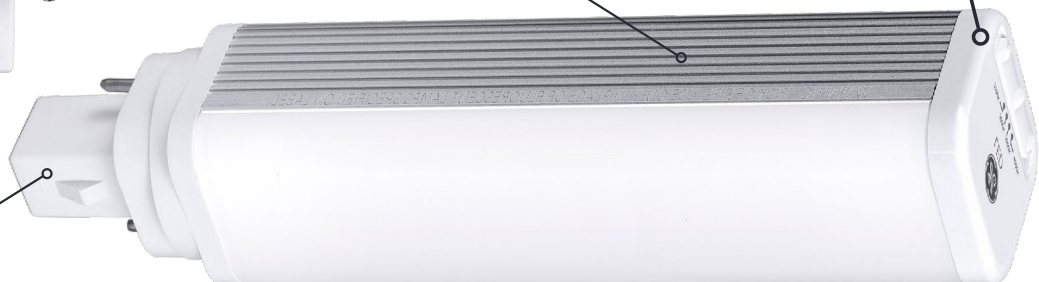

Horizontal orientation
lamps feature a
rotatable base

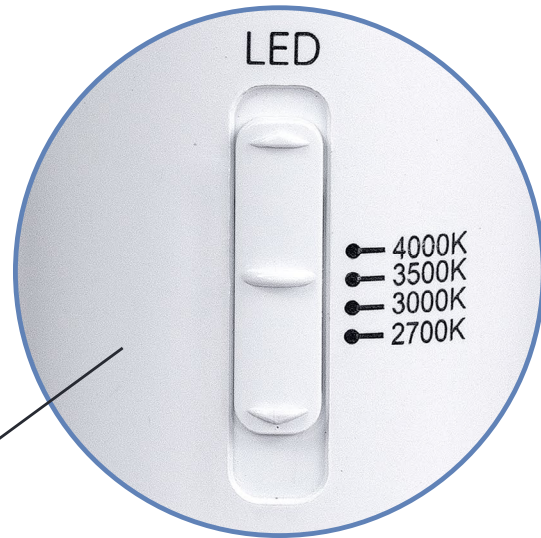



LED Lamps - Plug-in

Type B 2-Pin Plug-in Lamps



CUSTOMER NAME _____

PROJECT NAME _____






DATE _____

NOTES _____

Ballast Bypass SpectraChoice™ 2-Pin Plug-in Lamps - Type B

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty ²	MOL (in)	MOD (in)	Lumens (Initial) ⁵	Selectable Color Temp.*	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	DLC ⁴	Location Rating ³	Additional Information
Horizontal 2-pin - Fits in G24d and G24q sockets - Ballast Bypass																
	G24	10.5	93300087	LED11BG24-H/8SC/120-347-4PK	120-347	24	6.4	1.9	1000	2700	80	13/18/26	50,000	N/A	Damp, Enclosed	Ballast Bypass, 4 pack
									1100	3000						
									1100	3500						
									1100	4000						
									1850	2700	80	32/42	50,000	N/A	Damp, Enclosed	Ballast Bypass
	G24	18	93312525	LED18BG24-H/8SC/120-347	120-347	12	6.8	2.3	1850	2700	80	32/42	50,000	N/A	Damp, Enclosed	Ballast Bypass
									1850	3000						
									1850	3500						
									1850	4000						
Vertical 2-pin - Fits in G24d and G24q sockets - Ballast Bypass																
	G24	10.5	93300088	LED11BG24-V/8SC/120-347-4PK	120-347	24	5.9	3.1	1000	2700	80	13/18/26	50,000	N/A	Damp, Enclosed	Ballast Bypass, 4 pack
									1100	3000						
									1100	3500						
									1100	4000						
									1850	2700	80	32/42	50,000	N/A	Damp, Enclosed	Ballast Bypass
	G24	18	93312489	LED18BG24-V/8SC/120-347	120-347	12	6.5	3.6	1850	2700	80	32/42	50,000	N/A	Damp, Enclosed	Ballast Bypass
									1850	3000						
									1850	3500						
									1850	4000						

Ballast Bypass Fixed Color Temperature 2-Pin Plug-in Lamps - Type B

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty ²	MOL (in)	MOD (in)	Lumens (Initial)	Color Temp. (Initial)	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	DLC ⁴	Location Rating ³	Additional Information
Type B 2-pin - G23 replacement - Ballast Bypass																
	G23	5	93312465	LED5BG23/827	120-277	24	5.4		500	2700K	80	7/9	50,000	N/A	Damp, Enclosed	Ballast Bypass
	G23	5	93312471	LED5BG23/830	120-277	24	5.4		500	3000K	80	7/9	50,000	N/A	Damp, Enclosed	Ballast Bypass
	G23	5	93312477	LED5BG23/835	120-277	24	5.4		500	3500K	80	7/9	50,000	N/A	Damp, Enclosed	Ballast Bypass
	G23	5	93312483	LED5BG23/840	120-277	24	5.4		500	4000K	80	7/9	50,000	N/A	Damp, Enclosed	Ballast Bypass
Type B 2-pin - GX23 replacement - Ballast Bypass																
	GX23	5	93312495	LED5BGX23/827	120-277	24	6.8		500	2700K	80	13	50,000	N/A	Damp, Enclosed	Ballast Bypass
	GX23	5	93312501	LED5BGX23/830	120-277	24	6.8		500	3000K	80	13	50,000	N/A	Damp, Enclosed	Ballast Bypass
	GX23	5	93312507	LED5BGX23/835	120-277	24	6.8		500	3500K	80	13	50,000	N/A	Damp, Enclosed	Ballast Bypass
	GX23	5	93312513	LED5BGX23/840	120-277	24	6.8		500	4000K	80	13	50,000	N/A	Damp, Enclosed	Ballast Bypass
	GX23	5	93312519	LED5BGX23/850	120-277	24	6.8		500	5000K	80	13	50,000	N/A	Damp, Enclosed	Ballast Bypass
Type B 2-pin - GX23-2 replacement - Ballast Bypass																
	GX23-2	7.5	93312531	LED8BGX23-2-O/827	120-277	24	4.7	1.5	800	2700K	80	13	20,000	N/A	Damp, Enclosed	Ballast Bypass
	GX23-2	7.5	93312537	LED8BGX23-2-O/830	120-277	24	4.7	1.5	800	3000K	80	13	20,000	N/A	Damp, Enclosed	Ballast Bypass
	GX23-2	7.5	93312543	LED8BGX23-2-O/835	120-277	24	4.7	1.5	800	3500K	80	13	20,000	N/A	Damp, Enclosed	Ballast Bypass
	GX23-2	7.5	93312549	LED8BGX23-2-O/840	120-277	24	4.7	1.5	800	4000K	80	13	20,000	N/A	Damp, Enclosed	Ballast Bypass
Type B 2-pin - Fits in G24d and G24q sockets - Ballast Bypass																
	G24	7.5	93300068	LED8BG24-O/827-4PK	120-277	24	4.4	1.5	800	2700K	80	13	20,000	N/A	Damp, Enclosed	Ballast Bypass, 4 pack
	G24	7.5	93300069	LED8BG24-O/830-4PK	120-277	24	4.4	1.5	850	3000K	80	13	20,000	N/A	Damp, Enclosed	Ballast Bypass, 4 pack
	G24	7.5	93300080	LED8BG24-O/835-4PK	120-277	24	4.4	1.5	850	3500K	80	13	20,000	N/A	Damp, Enclosed	Ballast Bypass, 4 pack
	G24	7.5	93300081	LED8BG24-O/840-4PK	120-277	24	4.4	1.5	850	4000K	80	13	20,000	N/A	Damp, Enclosed	Ballast Bypass, 4 pack
Type B 2-pin - Fits in G24d and G24q sockets - Ballast Bypass																
	G24	10	93300082	LED10BG24-O/827-4PK	120-277	24	5.4	1.8	1100	2700K	80	18	50,000	N/A	Damp, Enclosed	Ballast Bypass, 4 pack
	G24	10	93300083	LED10BG24-O/830-4PK	120-277	24	5.4	1.8	1200	3000K	80	18	50,000	N/A	Damp, Enclosed	Ballast Bypass, 4 pack
	G24	10	93300084	LED10BG24-O/835-4PK	120-277	24	5.4	1.8	1200	3500K	80	18	50,000	N/A	Damp, Enclosed	Ballast Bypass, 4 pack
	G24	10	93300086	LED10BG24-O/840-4PK	120-277	24	5.4	1.8	1200	4000K	80	18	50,000	N/A	Damp, Enclosed	Ballast Bypass, 4 pack

Information provided is subject to change without notice. Please verify all details with Current. All values are design or typical values when measured under laboratory conditions, and Current makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

² Minimum order quantity from Current - Carton Qty; Smaller unit of sale pack inside carton

³ UL 1993 Environmental Requirements for LED LAMPS

Damp Location - Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

⁴ DLC* does not have a category for two-pin plug-in lamps.

⁵ Lumen levels correspond with color temperature.

* Default color temperature setting is 4000K.