

# GTX<sup>®</sup>

## VLA2-USA Model LED Signal Modules

12 inch


Incandescent look (120V)



Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Notes \_\_\_\_\_

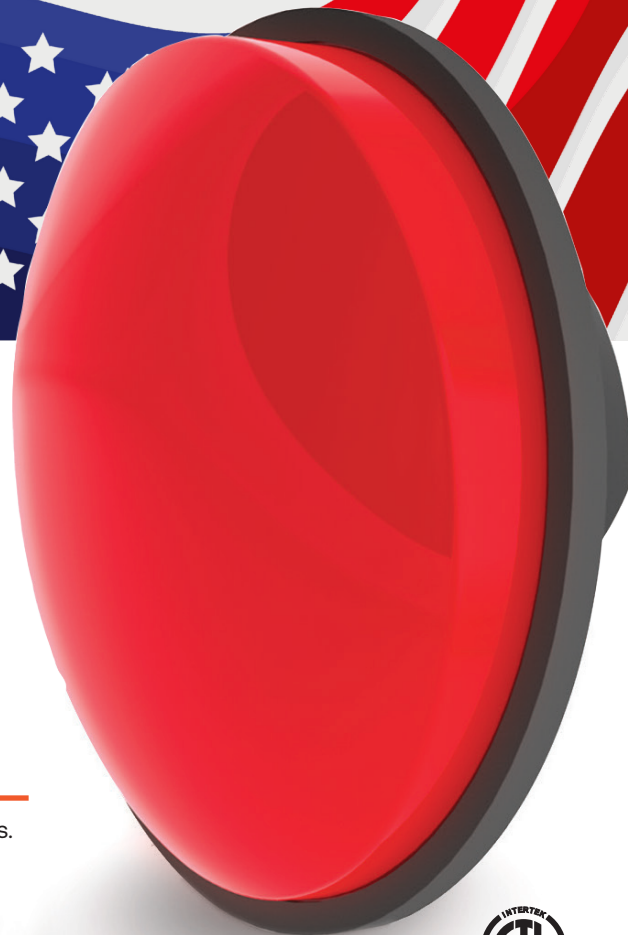

### ROBUST FEATURES

- Optimal thermal management for longer life.
- Provides performance under extreme field temperature conditions.

### INNOVATIVE DESIGN

- Low profile module permits efficient installation into existing traffic housings.
- Power consumption levels allow compatibility with most controllers.

### OUTSTANDING PERFORMANCE

- High-brightness central light source and custom optical lensing distribute light uniformly and efficiently.
- Rigorously tested for long life design and low maintenance costs.
- Excellent color uniformity.

### MEETS RIGOROUS CERTIFICATION & TESTING STANDARDS

- All VLA2-USA LED signals are manufactured in the United States, in full compliance with the Build America, Buy America (BABA) Act requirements.
- Intertek ETL Verified compliant.
- Compliant with ITE VTCSH LED Circular Signal Supplement dated June 27th 2005.




The Greatest Signals Stand the Test of Time.™

# GTX<sup>®</sup> City LED Signal Modules

12 inch

Project Name \_\_\_\_\_  
Date \_\_\_\_\_ Type \_\_\_\_\_  
Notes \_\_\_\_\_

## Mechanical Outline Dimensions in inches (mm)

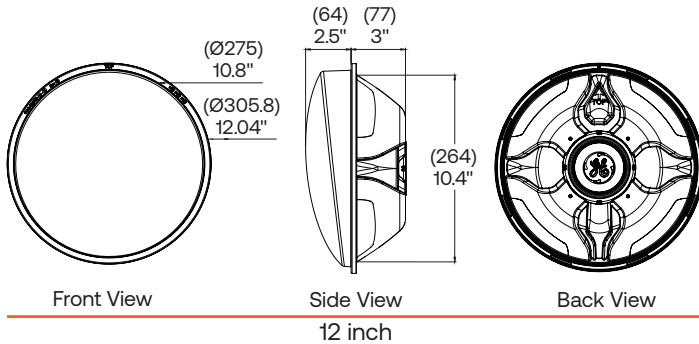

## Design Compliance

Test type	Compliance
Luminous Intensity	ITE VTCSH-LED Circular Signal Supplement-June 2005
Chromaticity	ITE VTCSH-LED Circular-June 2005
Moisture Resistance	Blown Wind Rain MIL-STD-810F method 506.4
Mechanical Vibration	MIL-STD-883 Method 2007
Electronic Noise	FCC Title 47 Sub. B Sec 15 <sup>1</sup>
Transient Voltage Protection	Sec. 2.16 NEMA TS2-2003, 300V, 2500W Sec. 2.16 NEMA TS2-2003, 600V, 10µF Sec. 2.18 NEMA TS2-2003, 1kV, 2Ω
Controller Compatibility	ITE VTCSH-LED Circular Signal Supplement-June 2005
Wiring	NFPA 70, National Electric Code
Transient Suppression	Sec. 8.2 IEC 61000-4-5 & Sec. 6.1.2 ANSI/IEEE C62.41.2 - 2002, 3kV, 2 Ω Sec. 8.0 IEC 61000-4-12 & Sec. 6.1.1 ANSI/IEEE C62.41.2 - 2002, 6kV, 30 Ω
Immunity	Radiated electromagnetic field immunity - radio frequencies IEC 6100-4-3:2020 10 V/m (80 MHz-1 GHz) - Class A

## Operating Specifications

Parameter	Rating
Operating Temperature Range*	-40 to +74°C (-40 to +165°F)
Operating Voltage Range	80 to 135 V (60Hz AC)
Power Factor (PF)	> 90%
Total Harmonic Distortion (THD)	< 20%
Minimum Voltage Turn-Off (VTO)	35 V
Turn-On/Turn-Off Time	< 75 ms
Lens & Shell Material	UV Stabilized Polycarbonate
Wiring	12 in lamp: 40 in, 18 AWG, Color Coded with Strain Relief

\* Operating Temperature Range per ITE 2007, Section 3.3.2

## Product Information

Model Number	Front Shell	Size (in)	AC Voltage Nominal	Power (W) Nominal	Wavelength (nm) Nominal	Maintained Intensity (Cd) Minimum <sup>2</sup>
● DR6-RTFB-VLA2-USA	Tinted	12	120V - 60Hz	8.5	625	365
○ DR6-RCFB-VLA2-USA	Clear					
● DR6-YTFB-VLA2-USA	Tinted	12	120V - 60Hz	12	589	910
○ DR6-YCFB-VLA2-USA	Clear					
● DR6-GTFB-VLA2-USA	Tinted	12	120V - 60Hz	7.5	501	475
○ DR6-GCFB-VLA2-USA	Clear					

Standard product equipped with universal connectors (insulated spade-quick disconnect).

All colors available in tinted or clear lens.

<sup>1</sup> Class A

<sup>2</sup> Measured at vertical angle of -2.5° and at horizontal angle of 0°.

Distributed by: