

**CUSTOMER NAME** 

PROJECT NAME

DATE TYPE

CATALOG NUMBER

## Arize Element® L400

HORT138

#### **Greenhouses and Indoor Farms**

The Arize Element L400 top light is an LED growing system for photoperiod extension or low DLI crops. The compact Element L400 delivers up to 550  $\mu$ mol/s with minimal shadowing, and radiates negligible heat compared to an HPS or CMH system, for year-round growing.

#### **Optical System**

Efficacy Range: 2.7 - 2.8 µmol/J

Spectrums: PPR, PPB

### **Ambient Temperature**

TYPE	TEMPERATURE RATING	
Operating Temperature	0°C to +40°C (32°F to 104°F)	

#### **Electrical**

IP Rating IP66 & UL wet rated

#### **Rated Lifetime**

36,000 hour L90 per TM-21

#### **Features**

Low weight and novel installation method simplifies the mounting process

Modular design allows for the power supply to be mounted remotely, away from the fixture

Unique design and small footprint minimize shadowing, allowing more natural light through

Negligible heat radiation compared to HPS or CMH fixtures

Impact-resistant design made of polycarbonate and aluminum

#### **Certifications & Warranty**

Five-year system warranty






# Element®

CUSTOMER NAME		
PROJECT NAME		
DATE	TYPE	
CATALOG NUMBER		

#### **Mechanical Outline**

Dimensions in [inches]. Metric equivalent in mm.

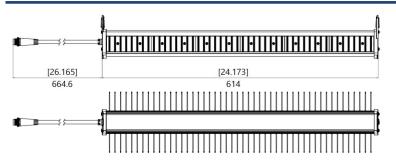




### **Spectra**


Type R

High red light to optimize plant growth and photosynthesis



#### Type B

Light that supports biomass and secondary metabolite production



SPECTRUM PHOTON DISTRIBUTION				
Ratio	Blue PF	Green PF	Red PF	Far Red PF
PPR	10.0%	0.0%	90.0%	0.0%
PPB	20.0%	0.0%	80.0%	0.0%

#### **Product Information**

SKU	DESCRIPTION	SPECTRUM	ELECTRICAL POWER (W)	PPF (μMOL/S)	EFFICACY (μMOL/J)	PACKAGE QUANTITY
93067254	GEHR3007M-N120CH-PPR-1	PPR	PPR 195	550	2.8	4pcs / box
	GEPSC070-210G-ADFNA					
93067255	GEHR3007MN120CH-PPB-1	PPB	195	525	2.7	4pcs / box
	GEPSC070-210G-ADFNA					

#### **Accessories**

SKU	DESCRIPTION	LONG DESCRIPTION	PACKAGE QUANTITY
93038986	GEPSC070-210G-ADFNA	120V-240VAC, 700mA, 210W Driver, UL	1pc
93067607	GECA30A14-AA06B	6 foot (1.83 m) inter-connection cable, UL	32pcs / box
93 067608	GECA30A14-AA12B	12 foot (3.66 m) inter-connection cable, UL	16pcs / box

