

# Lumination

## Lumination® LRX Series

### LED Downlights



CUSTOMER NAME \_\_\_\_\_

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

The **Lumination®** LRX Series is a specifiable downlight for retrofit and new construction applications. The LRX series is available in round and square form factors with 5 aperture options ranging from 4in to 12in. The LRX series features field-selectable lumen options, adapter rings, and a variety of reflector and trim finishes, making it a versatile solution for commercial spaces.

## CONSTRUCTION

<b>Housing:</b>	16 gauge aluminum spinning reflector housing
<b>Lens:</b>	Custom engineered reflectors for wide distributions.
<b>Paint:</b>	Powdercoat painted
<b>Weights:</b>	Up to 4.6 pounds
<b>Optical Assembly:</b>	High efficiency reflector and optical diffuser.

## OPTICAL SYSTEM

<b>Lumens:</b>	1000–6000lm Selectable: 650/1000lm, 3000/4000lm, 4000/5000/6000lm
<b>Distribution:</b>	90°
<b>Efficacy:</b>	Up to 112 LPW
<b>CCT:</b>	3000K, 3500K, 4000K
<b>CRI:</b>	82

## ELECTRICAL

<b>Input Voltage:</b>	120–277V
<b>Input Frequency:</b>	50/60Hz
<b>Power Factor (PF)*:</b>	> 0.9%
<b>Total Harmonic Distortion (THD)*:</b>	<20%

\* PF and THD may vary with options

## CONTROLS

<b>Dimming:</b>	Standard 0–10V, Dimming 10%
<b>Controls:</b>	Daintree compatible with accessory kit

## AMBIENT TEMPERATURE

TYPE	TEMPERATURE RATE
<b>OPERATING TEMPERATURE</b>	-10°C TO +40°C (no EMBB) 0°C TO +25°C (with EMBB)

## LUMEN MAINTENANCE

<b>LXX(10K) @ Hours</b> 50,000 HR
<b>L85</b>

## MOUNTING

- Spring clips clamp on to existing frame.
- Accessible from beneath the ceiling.
- New construction utilizing FRAME.
- Fixture mounting to an existing metal frame, or install with new frame kit (ordered separately), interior ceiling applications only.
- Conduit connect to quick-disconnect for easy installation.

## ADDITIONAL NOTES

- Non-IC Rated
- IK00 Impact Resistant
- Optional black, white or silver trims available (ordered separately)

## DESIGN LIFE & WARRANTY

- **Current's Limited 5-year Warranty:**  
Please see website.





# Lumination® LRX Series

LED Downlights

## Ordering Information

CUSTOMER NAME \_\_\_\_\_

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

LRX

8

MD

FAMILY	SHAPE/SIZE	LUMENS	CRI	CCT	DIMMING	OPTIONS
LRX = Lumination® LRX Series Downlight	<b>R4</b> = 4" Round Retrofit Downlight	<b>10<sup>1</sup></b> = 1000lm/650lm	<b>8</b> = 82 CRI	<b>30</b> = 3000K <b>35</b> = 3500K <b>40</b> = 4000K	<b>MD</b> = 0–10V Dimming	<b>Blank</b> = None <b>EL</b> = EMBB Ready
	<b>S4</b> = 4" Square Retrofit Downlight					
	<b>R6</b> = 6" Round Retrofit Downlight	<b>10<sup>1</sup></b> = 1000lm/650lm <b>18</b> = 1800lm				
	<b>S6</b> = 6" Square					
	<b>R8</b> = 8" Round Retrofit Downlight	<b>10<sup>1</sup></b> = 1000lm/650lm <b>18</b> = 1800lm				
	<b>S8</b> = 8" Square Retrofit Downlight	<b>30</b> = 3000lm <b>40<sup>1</sup></b> = 4000lm/3000lm				
	<b>R10<sup>4</sup></b> = 10" Round Retrofit Downlight	<b>30<sup>4</sup></b> = 3000lm <b>60<sup>1,4</sup></b> = 4000lm/5000lm/6000lm				
	<b>R12<sup>4</sup></b> = 12" Round Retrofit Downlight	<b>60<sup>1,4</sup></b> = 4000lm/5000lm/6000lm				

### Notes:

1. Selectable Lumen packages allow for field adjustments to light output. See page 7 for details.
2. The standard trim is white. Colored trim options are available see page 4 for details.
3. Attach to existing frame or install with new frame kit (ordered separately) per UL.
4. 10inch and 12inch 3000lm & 4000/5000/6000lm only for MD=0–10V dimming.



0–10V DIMMING							
NOMINAL LUMENS	650	1000	1800	3000	4000	5000	6000
Delivered Lumens - LRX*4	700	1020	N/A	N/A	N/A	N/A	N/A
Delivered Lumens - LRX*6	700	1050	1900	N/A	N/A	N/A	N/A
Delivered Lumens - LRX*8	750	1200	2000	3300	N/A	N/A	N/A
Delivered Lumens - LRXR10	N/A	N/A	N/A	3180	4600	5400	6200
Delivered Lumens - LRXR12	N/A	N/A	N/A	N/A	4650	5450	6250
System Input Power (W)	8.5	13	22	35	41	49	59.5
System Efficacy (LPW)	88	92	91	94	112	110	104

DELIVERED LUMEN MULTIPLIERS	
CCT	MULTIPLIERS
4000K	1
3500K	0.98
3000K	0.94

## ACCESSORIES: LUMINATION® LRX SERIES - REMODEL (GOOF) RINGS

The essential accessory for any project, the goof ring helps to cover openings in the ceiling with a trim that blends with the existing LRX trim. Goof rings are available in white only. Verify the existing opening and LRX fixture to order the correct goof ring, details shown in the table below. Always verify proper installation per the Installation Guide.

### Installation Position

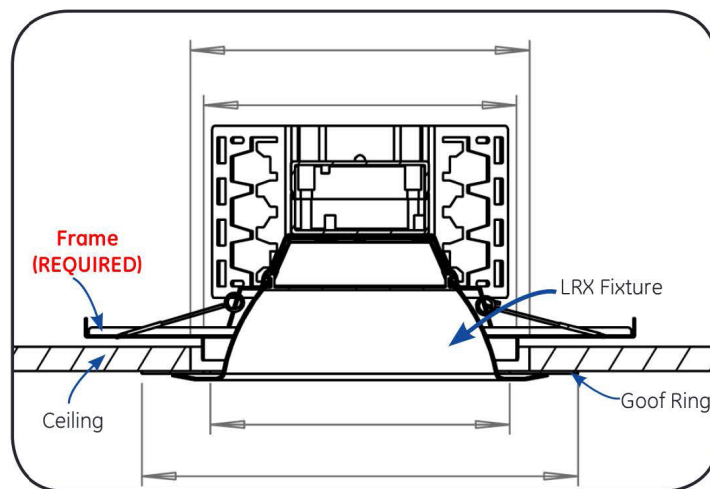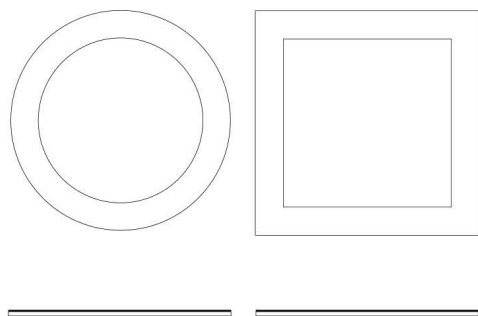

**Notes:** Please check the compatibility of the goof ring and the fixture by referring to the table below.










### Goof Rings

FOR NEW CONSTRUCTION									FOR RETROFIT	
GOOF RING SKU	GOOF RING DESCRIPTION	GOOF RING SHAPE	SUITABLE FIXTURE	SUITABLE FRAME	INSIDE OF GOOF RING (IN)	OUTSIDE OF GOOF RING (IN)	CEILING HOLD MIN. (IN)	CEILING HOLE MAX. (IN)	SUITABLE FRAME DIMENSION (IN)	FRAME HOLE (IN)
93114516	GRRX4R6PTWT	ROUND	LRXR4XXXXXX	FRAME4RXXXX	4.48	7.09	5.20	6.69	12.60 x 7.64 x 3.54	4.20–4.70
93114517	GRRX4S6PTWT	SQUARE	LRXS4XXXXXX	FRAME4SXXXX	4.48	7.09	5.20	6.19	12.60 x 7.64 x 3.54	4.20–4.90
93114518	GRRX6R8PTWT	ROUND	LRXR6XXXXXX	FRAME6RXXXX	6.18	9.00	6.50	8.60	12.60 x 7.64 x 3.54	5.91–6.50
93114519	GRRX6S8PTWT	SQUARE	LRXS6XXXXXX	FRAME6SXXXX	6.22	8.98	7.50	8.08	13.35 x 11.34 x 3.54	5.95–7.50
93114520	GRRX8R10PTWT	ROUND	LRXR8XXXXXX	FRAME8RXXXX	7.87	10.50	8.27	10.10	15.55 x 11.34 x 3.54	7.68–8.27
93114521	GRRX8S10PTWT	SQUARE	LRXS8XXXXXX	FRAME8SXXXX	8.23	10.98	9.50	10.08	13.35 x 11.34 x 3.54	7.95–9.50
93114522	GRRX8R12PTWT	ROUND	LRXR8XXXXXX	FRAME8RXXXX	7.87	12.99	10.10	12.59	15.55 x 11.34 x 3.54	7.68–8.27
93114523	GRRX8S12PTWT	SQUARE	LRXS8XXXXXX	FRAME8SXXXX	8.23	12.99	10.58	12.09	13.35 x 11.34 x 3.54	7.95–9.50


## ACCESSORIES: LUMINATION® LRX SERIES

PRODUCT DESCRIPTION	MATERIAL DESCRIPTION	MATERIAL	NOTES
EMERGENCY BATTERY BACKUP KIT (7W)	LRXEMBBKIT07	93043031	7 WATT EMBB QUICK CONNECT KIT (MUST HAVE FIXTURE WITH "EL" OPTION)
EMERGENCY BATTERY BACKUP KIT (10W)	LRXEMBBKIT10	93043540	10 WATT EMBB QUICK CONNECT KIT (MUST HAVE FIXTURE WITH "EL" OPTION)
4" NEW CONSTRUCTION ROUND FRAME KIT	FRAME4R	93090208	RECOMMENDED FOR NEW CONSTRUCTION APPLICATIONS
6" NEW CONSTRUCTION ROUND FRAME KIT	FRAME6R	93025091	RECOMMENDED FOR NEW CONSTRUCTION APPLICATIONS
8" NEW CONSTRUCTION ROUND FRAME KIT	FRAME8R	93025092	RECOMMENDED FOR NEW CONSTRUCTION APPLICATIONS
10" NEW CONSTRUCTION ROUND FRAME KIT	FRAME10R	93124880	RECOMMENDED FOR NEW CONSTRUCTION APPLICATIONS
12" NEW CONSTRUCTION ROUND FRAME KIT	FRAME12R	93124881	RECOMMENDED FOR NEW CONSTRUCTION APPLICATIONS
4" NEW CONSTRUCTION SQUARE FRAME KIT	FRAME4S	93090209	RECOMMENDED FOR NEW CONSTRUCTION APPLICATIONS
6" NEW CONSTRUCTION SQUARE FRAME KIT	FRAME6S	93045426	RECOMMENDED FOR NEW CONSTRUCTION APPLICATIONS
8" NEW CONSTRUCTION SQUARE FRAME KIT	FRAME8S	93045427	RECOMMENDED FOR NEW CONSTRUCTION APPLICATIONS
347V KIT	LRX347V277	93036250	347V TRANSFORMER QUICK CONNECT KIT
DAINTREE CONTROLS ACCESSORY KIT	LCABAVTQUNGALV	93057194	SEE LCA KIT LITERATURE & INSTALL GUIDE, DOES NOT INCLUDE SENSOR
SENSOR ACCESSORY KIT - DAINTREE ENTERPRISE	LSAATZFM6	93098473	SEE LSA KITS LITERATURE & INSTALL GUIDE
SENSOR ACCESSORY KIT - DAINTREE ONE & EZ CONNECT	LSAAT/T1FM6	93098472	SEE LSA KITS LITERATURE & INSTALL GUIDE
HANGER BAR, C-CHANNEL, 25 - 1/4" (BOXED PAIR)	BH3	93110306	RECOMMENDED FOR NEW CONSTRUCTION APPLICATIONS

## ACCESSORIES: LUMINATION® LRX SERIES COLORED ROUND TRIM OPTIONS

ROUND					SQUARE			
SILVER	BLACK	SPECULAR WITH WHITE TRIM	SEMI-DIFFUSE WITH WHITE TRIM	SEMI-DIFFUSE WITH MATCHING TRIM	SILVER	BLACK	SPECULAR WITH WHITE TRIM	SEMI-DIFFUSE WITH WHITE TRIM
								
4"	93151744 LRXTRIMR4SV	93151745 LRXTRIMR4BL	93151746 LRXTRIMR4SP	93151747 LRXTRIMR4SD	93151748 LRXTRIMS4SV	93151749 LRXTRIMS4BL	93151750 LRXTRIMS4SP	93151751 LRXTRIMS4SD
6"	93059502 LRXTRIMR6SV	93059501 LRXTRIMR6BL	93151752 LRXTRIMR6SP	93151753 LRXTRIMR6SD	93152569 LRXTRIMR6SA	93151754 LRXTRIMS6SV	93151755 LRXTRIMS6BL	93151756 LRXTRIMS6SP
8"	93059504 LRXTRIMR8SV	93059503 LRXTRIMR8BL						

## DIMENSIONS

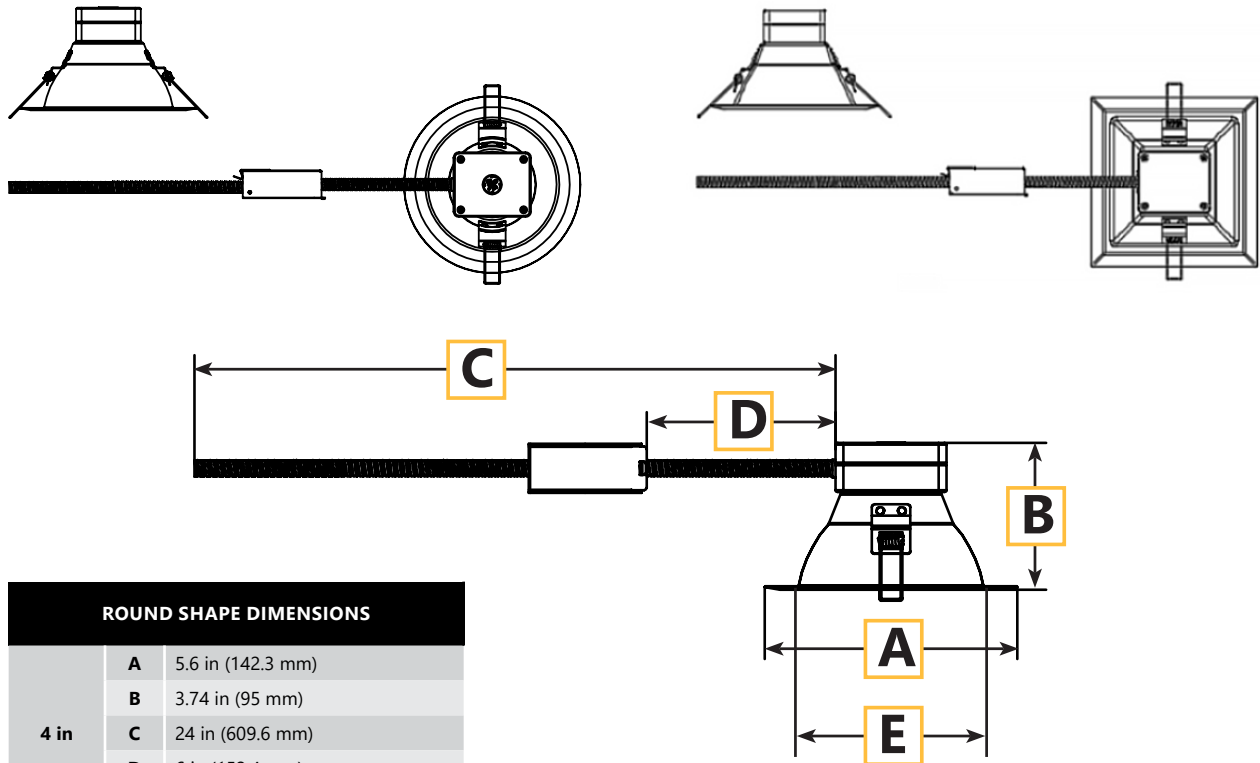


ROUND SHAPE DIMENSIONS		
4 in	A	5.6 in (142.3 mm)
	B	3.74 in (95 mm)
	C	24 in (609.6 mm)
	D	6 in (152.4 mm)
	E	Ceiling Cutout Min: 4.4 in
6 in	A	7.75 in (196.8 mm)
	B	4.5 in (114.2 mm)
	C	24 in (609.6 mm)
	D	6 in (152.4 mm)
	E	Ceiling Cutout Min: 5.7 in
8 in	A	9.75 in (247.6 mm)
	B	5.1 in (129.4 mm)
	C	24 in (609.6 mm)
	D	6 in (152.4 mm)
	E	Ceiling Cutout Min: 7.7 in
10 in	A	12 in (305 mm)
	B	5.8 in (148.2 mm)
	C	24.0 in (609.6 mm)
	D	6 in (152.4 mm)
	E	Ceiling Cutout Min: 9.7 in
12 in	A	14 in (355 mm)
	B	6.23 in (158.2 mm)
	C	24 in (609.6 mm)
	D	6 in (152.4 mm)
	E	Ceiling Cutout Min: 11.7 in

SQUARE SHAPE DIMENSIONS		
4 in	A	5.75 in (146 mm)
	B	3.74 in (95 mm)
	C	24 in (609.6 mm)
	D	6 in (152.4 mm)
	E	Ceiling Cutout Min: 4 in for ceiling thickness ≤ 10 mm; 4.2 in for ceiling thickness > 10 mm
6 in	A	7.75 in (196.8 mm)
	B	4.5 in (114.2 mm)
	C	24 in (609.6 mm)
	D	6 in (152.4 mm)
	E	Ceiling Cutout Min: 5.6 in
8 in	A	9.75 in (247.6 mm)
	B	5.1 in (129.4 mm)
	C	24 in (609.6 mm)
	D	6 in (152.4 mm)
	E	Ceiling Cutout Min 7.6 in

**PHOTOMETRIC DATA:**
**4" Round LRX**

1059 LM

LRXR410830MD




ZONE	LUMENS
0-10	50.98
10-20	143.53
20-30	208.85
30-40	226.68
40-50	194.68
50-60	131.45
60-70	66.78
70-80	29.04
80-90	6.9

ZONE	LUMENS	% OF FIXTURE
0-20	194.51	18.4
0-30	403.36	38.1
0-40	630.04	59.5
0-60	956.17	90.3
0-80	1052.0	99.3
0-90	1058.9	100.0

**6" Round LRX**

1000 LM

LRXR610830MD




ZONE	LUMENS
0-10	48.26
10-20	135.99
20-30	199.14
30-40	221.96
40-50	188.12
50-60	118.95
60-70	54.04
70-80	25.47
80-90	7.78

ZONE	LUMENS	% OF FIXTURE
0-20	184.25	18.4
0-30	383.39	38.3
0-40	605.34	60.5
0-60	912.41	91.2
0-80	991.92	99.2
0-90	999.70	100.0

**8" Round LRX**

1797 LM

LRXR818830MD




ZONE	LUMENS
0-10	87.00
10-20	245.00
20-30	357.94
30-40	405.72
40-50	355.72
50-60	213.19
60-70	84.35
70-80	37.58
80-90	10.61

ZONE	LUMENS	% OF FIXTURE
0-20	332.00	18.4
0-30	689.94	38.3
0-40	1095.66	60.9
0-60	1664.57	92.5
0-80	1786.51	99.2
0-90	1797.12	99.8

**10" Round LRX**

5893 LM

LRXR1030830MD




ZONE	LUMENS
0-10	265.56
10-20	751.07
20-30	1109.15
30-40	1284.03
40-50	1192.46
50-60	797.55
60-70	323.82
70-80	129.46
80-90	639.60

ZONE	LUMENS	% OF FIXTURE
0-20	538.49	17.2
0-30	2125.78	36.0
0-40	3409.81	57.8
0-60	5399.82	91.5
0-80	5853.11	99.2
0-90	5892.71	99.9
10-90	5627.15	95.4
20-40	2393.19	40.6
20-50	3585.65	60.8
40-70	2313.83	39.2
60-80	453.28	7.7
70-80	129.46	2.2
80-90	39.60	0.7

**PHOTOMETRIC DATA:**
**12" Round LRX**

6070 LM

LRXR1260830MD




ZONE	LUMENS
0-10	254.76
10-20	726.52
20-30	1087.30
30-40	1279.70
40-50	1270.85
50-60	939.08
60-70	372.27
70-80	106.14
80-90	33.16

ZONE	LUMENS	% OF FIXTURE
0-20	981.28	16.1
0-30	2068.58	34.0
0-40	3348.28	55.1
0-60	5558.22	91.5
0-80	6036.63	99.3
0-90	6069.79	99.9
10-90	5815.03	95.7
20-40	2367.00	39.0
20-50	3637.86	59.9
40-70	2582.21	42.5
60-80	478.41	7.9
70-80	106.14	1.7
80-90	33.16	0.5

**4" Square LRX**

1045 LM

LRXS410830MD




ZONE	LUMENS
0-10	48.79
10-20	136.05
20-30	195.03
30-40	214.18
40-50	192.29
50-60	143.00
60-70	81.10
70-80	27.89
80-90	6.20

ZONE	LUMENS	% OF FIXTURE
0-20	184.85	17.7
0-30	379.88	36.3
0-40	594.06	56.7
0-60	929.35	88.8
0-80	1038.34	99.2
0-90	1044.54	99.8

**6" Square LRX**

1050 LM

LRXS610830MD




ZONE	LUMENS
0-10	48.40
10-20	137.38
20-30	203.26
30-40	229.80
40-50	202.64
50-60	136.51
60-70	63.03
70-80	22.61
80-90	6.12

ZONE	LUMENS	% OF FIXTURE
0-20	185.78	17.7
0-30	389.04	37.1
0-40	618.84	58.9
0-60	957.99	91.2
0-80	1043.63	99.4
0-90	1049.74	100.0

**8" Square LRX**

1199 LM

LRXS810830MD



ZONE	LUMENS
0-10	51.81
10-20	147.65
20-30	220.84
30-40	258.58
40-50	243.12
50-60	169.22
60-70	75.23
70-80	25.23
80-90	7.77

ZONE	LUMENS	% OF FIXTURE
0-20	199.46	16.6
0-30	420.3	35.0
0-40	678.88	56.6
0-60	1091.68	90.9
0-80	1191.68	99.3
0-90	1199.45	100.0

## DAINTREE CONTROLS

### Daintree® Wireless Controls:

There is no one size fits all for wireless controls. Some networks want simple solutions that reduce energy consumption and meet code compliance while others are more ambitious, looking to capitalize on the LED and controls savings to fund a scalable, enterprise-grade, internet of things solution. The advantage of the Daintree® Wireless platform is it's ability to integrate into indoor, outdoor and high bay environments. The Daintree® Wireless Controls provide the infrastructure to future proof your buildings, easily upgrade to Networked solutions and provide the ability to integrate into IoT solutions that are right for your business.

- **Daintree® One:** Standalone Wireless Controls
- **Daintree® EZ Connect:** Room-Based Wireless Lighting Controls
- **Daintree® Networked:** Networked Lighting Controls for Smart Building & IoT Enablement.

Daintree® Wireless Controls are already integrated in your favorite Current LED fixtures. Integrating the controls into the fixture cuts labor costs considerably since the sensors are already embedded in the lighting fixtures. There's no need to get above the ceiling plenum and install additional devices. Visit our website [LED.com](http://LED.com) for a complete list of LED Fixtures.