


**CUSTOMER NAME** \_\_\_\_\_

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

The Lumination® RPL series is an LED ProLine® contractor grade luminaire for retrofit applications when speed of install and/or the need to avoid disruption above the ceiling plane is desired. The three-part PVR design offers even lower installation costs with switchable lumens. Designed for maximum flexibility with a minimum number of different parts, one product can offer the equivalent of 3 to 12 different SKU's. Field installable accessory kits require no "guessing" what the product needs of your next job will be. The kits are ordered separately and can be installed in less than two minutes.

## ProLine®

### CONSTRUCTION

<b>Housing:</b>	Durable, long lasting construction. Steel, galvanized, cold-rolled, commercial quality.
<b>Optical Assembly:</b>	Precision formed optical lens/diffuser and technically balanced for efficacy, and transmissivity. This offers smooth uniform light (no pixels or stripes) and no dark areas on lens.
<b>Paint:</b>	Post painted powder coat matte finish
<b>Weight:</b>	<11 lbs (<4.98 kg)

### OPTICAL SYSTEM

<b>Lumens:</b>	2200/3500/4200 lumens (Field Switchable)
<b>R9:</b>	>0
<b>Wattage:</b>	19.5/32.5/39.5 watts
<b>Efficacy:</b>	106 LPW
<b>CCT:</b>	3500K/4000K
<b>CRI:</b>	80+
<b>Color Consistency:</b>	Central limit 4-Step MacAdam Ellipse with LED recipe approach for tight unit to unit color control

### ELECTRICAL

<b>Input Voltage:</b>	120-277V, 347V (using an accessory kit)
<b>Input Frequency:</b>	50/60 Hz
<b>Power Factor (PF)*:</b>	>0.9
<b>Total Harmonic Distortion (THD)*:</b>	<20%
<b>LED Driver Type:</b>	Class 2
<b>Surge Protection:</b>	ANSI C82.77 Compliant

\* PF and THD may vary with options

### CONTROLS

<b>Dimming:</b>	0-10V, 10% ANSI C137.x compliant
-----------------	-------------------------------------

### LUMEN AMBIENT TEMPERATURE

TYPE	TEMPERATURE RATE
<b>OPERATING TEMPERATURE</b>	-20°C to +35°C (-4°F to +95°F)
<b>STORAGE TEMPERATURE</b>	-40°C to +70°C (-40°F to +158°F)

### LUMEN MAINTENANCE

TM-21 LED Lumen Maintenance Data:

ESTIMATED LXX(10K) @ HRS 100,000 HR	REPORTED LXX(10K) @ HRS 60,000 HR	LXX(10K) @ HOURS 50,000 HR
<b>L89</b>	<b>L92</b>	<b>L70</b>

### MOUNTING

- Fits standard T-Bar grid luminaires (dropceilings)

### DESIGN LIFE & WARRANTY

- Current's Limited 5-year Warranty: Please see website
- Reliability Testing: Components and systems evaluation



**CUSTOMER NAME**

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

**Ordering Information<sup>1</sup>:**

**RPL 22 A 0 3X MM 8 VQ RM WHITE**

FAMILY	FIXTURE TYPE	GENERATION	VOLTAGE	NOMINAL LUMENS	DISTRIBUTION	CRI/CRT	CONTROLS <sup>2</sup>	MOUNTING	FINISH	OPTIONS <sup>3</sup>
RPL = Refit™ Panel Light	22 = 2' X 2'	A = 1 <sup>st</sup> Generation	0 = 120-277V	3X = Nominal Lumen Level	MM = Med. Lambertian	835 = 80CRI, 3500K 840 = 80CRI, 4000K	VQ = 0-10V Dimming	RM = Refit Mount	WHITE = White	All options are ordered separately as accessories, please see below

**PERFORMANCE TABLE**

EXAMPLE CONFIGURATION	LUMINAIRE LUMENS (SWITCHABLE <sup>4</sup> )	LUMINAIRE TOTAL SYSTEM WATTS	LPW	QUICKSHIP
RPL22A03XMM835VQRMWHITE	2200/3500/4200	19.5/32.5/39.5	106	1-100 Units
RPL22A03XMM840VQRMWHITE	2200/3500/4200	19.5/32.5/39.5	106	1-100 Units

**ORDERING NOTES:**

- All RPL units are prices as single units and must be ordered as single units in even quantities as this product is packed two per box. It should be noted in receiving documents that one box has two units and should be received as two units.
- See accessories for wireless and sensor options.
- All options are accessories that are quickly and easily attached and/or wired to the luminaire in the field by the installer.
- Fixture is field configurable for three different lumen/wattage levels with a switch. Switch default is the middle level (3500 Lumens, 32.5 Watts).

ACCESSORIES (ORDERED AND SOLD SEPARATE)	DESCRIPTION CODE	PRODUCT CODE
347V kit	LFAMBADVQRM	93105260
EMBB kit (Provides 90-minutes of Emergency lighting), test switch remote mounted and can be mounted in a ceiling tile next to the fixture.	LFAMBAOVQRMEL	93105261
Wireless Enabled, Daintree Compatible kit (most commonly used option for Daintree)	LCAMBAOTQRM	93105263
Wireless Enabled, Daintree Compatible with Daintree WFA 100 kit (allows for field connectivity to remote sensor)	LCAMBAOTSRM	93105262
Wireless Enabled, Daintree Compatible + EMBB kit	LCAMBAOTQRMEL	93105265
Wireless Enabled, Daintree Compatible with Daintree WFA 100 + EMBB kit	LCAMBAOTSRMEL	93105264
Wireless Enabled, Daintree Compatible with Daintree WFA 100 + Emergency Bypass kit (Dual Shunt Relay to be used with building generator backup systems to override dimming - Contact manufacturer prior to ordering to confirm application)	LCAMBAOTSRMB2	93105366
Digital Input Driver (does not have 0-10v input) that uses a field installed accessory (in the ceiling -not the fixture) that is Daintree compatible such as EZ Connect or Enterprise sensors	LCAMBAOSQRM	93105368
REPLACEMENT DIFFUSER(10 PACK)	RPL22A	93106303

SENSOR KIT	PRODUCT CODE
Daintree One/EZ Connect: LSAATT/T1FM6 (WIT100 Sensor Kit)	93098472
Daintree Enterprise: LSAATZFM6 (WIZ100 Sensor Kit)	93098473
Daintree Ent. Multi Sensor: LSAATMFM6 (WMZ10 Sensor Kit)	93119594

# Lumination LED Luminaires

RPL 22 Series - Refit™ Kit

2' x 2' LED Recessed Luminaire

**Dimensions & Photometric Data**


## CUSTOMER NAME

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_


## PRODUCT DIMENSIONS MM (INCHES):

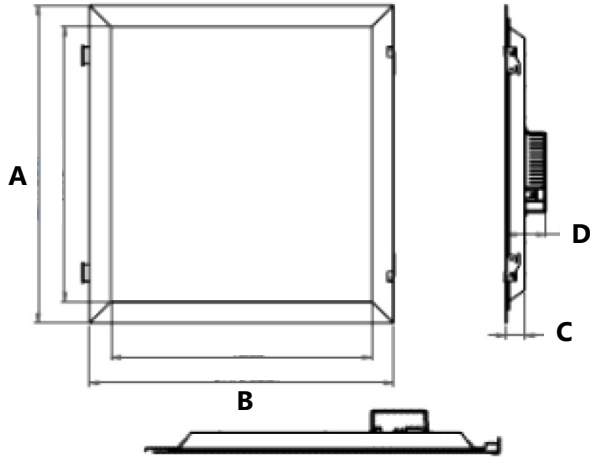

A	B	C	D
22.99 In	21.72 In	1.34 In	2.82 In

## PHOTOMETRIC DATA: RPL SERIES

RPL Series 2' x 2'  
80+ CRI  
3500K/4200K  
3500LM  
RPL22A03XMMXXXXXRMWHT

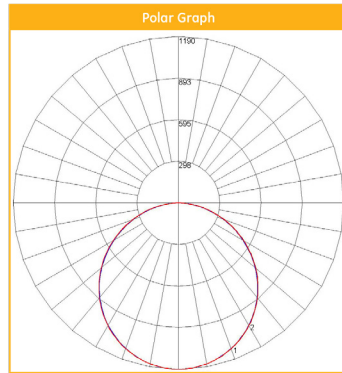

ZONE	LUMENS
0-10	112.63
10-20	323.10
20-30	491.41
30-40	595.63
40-50	621.84
50-60	566.94
60-70	439.62
70-80	264.06
80-90	80.74
90-100	0.76
100-110	0.42
110-120	0.40
120-130	0.43
130-140	0.51
140-150	0.52
150-160	0.50
160-170	0.36
170-180	0.13

ZONE	LUMENS	% OF FIXTURE
0-20	435.73	12.40
0-30	927.14	26.50
0-40	1522.77	43.50
0-60	2711.55	77.50
0-80	3415.23	97.60
0-90	3495.97	99.90
10-90	3383.34	96.70
20-40	1087.04	31.10
20-50	1708.88	48.80
40-70	1628.40	46.50
60-80	703.67	20.10
70-80	264.06	7.50
80-90	80.74	2.30
90-110	1.18	0.00
90-120	1.58	0.00
90-130	2.01	0.10
90-150	3.05	0.10
90-180	4.03	0.10
110-180	2.85	0.10
0-180	3500.00	100.00

# Lumination LED Luminaires

RPL 22 Series - Refit™ Kit

2' x 2' LED Recessed Luminaire

**Controls**

## CUSTOMER NAME

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

## DAINTREE® CONTROLS

### Daintree® Wireless Controls:

There is no one size fits all for wireless controls. Some networks want simple solutions that reduce energy consumption and meet code compliance while others are more ambitious, looking to capitalize on the LED and controls savings to fund a scalable, enterprise-grade, internet of things solution. The advantage of the Daintree® Wireless platform is it's ability to integrate into indoor, outdoor and high bay environments. The Daintree® Wireless Controls provide the infrastructure to future proof your buildings, easily upgrade to Networked solutions and provide the ability to integrate into IoT solutions that are right for your business.

- Daintree® One: Standalone Wireless Controls
- Daintree® EZ Connect: Room-Based Wireless Lighting Controls
- Daintree® Networked: Networked Lighting Controls for Smart Building & IoT Enablement

**Note:** For networked solutions, use the LVT/LVR series products.

Daintree® Wireless Controls are already integrated in your favorite Current LED fixtures. Integrating the controls into the fixture cuts labor costs considerably since the sensors are already embedded in the lighting fixtures. There's no need to get above the ceiling plenum and install additional devices. Visit our website [LED.com](http://LED.com) for a complete list of LED Fixtures.

## ProLine®

Every contractor deserves a  
Fast, Reliable, and Trusted Lighting Partner



**For Product or Technical Questions:**

Email: [lightingproinfo@currentlighting.com](mailto:lightingproinfo@currentlighting.com)

Phone: +1 888 694 3533, option 2