

## **NOR-3.5S**

NONI 3.5" SQUARE RECESSED FAMILY


DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

## **ORDERING GUIDE**

Examples: NOR-3.5SDL-NHN17-930K-MD-DM1NU/NOR-3.5SDS-TRM-FWHS-RBL-SOL

CATALOG #

## HOUSING

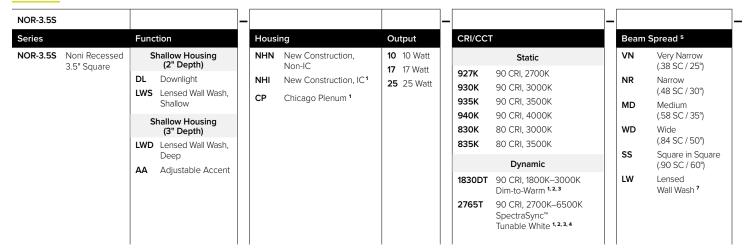

				U		_	
Dimming		Contro	ols <sup>13</sup>	Voltage		A	Accessories
DM1 PDM ERP PEQ0E	0–10V 1% <sup>8, 14, 15</sup> ELV, TRIAC 1% <sup>8, 14</sup> 0–10V, ELV, TRIAC Dim-to-Dark <sup>8, 15</sup> Lutron Hi-Lume Premier 0.1%	N LV LVE NXE	None Lutron Vive 0–10V (120–277V) Lutron Vive EcoSystem (120V Only) NX Dual RJ45 SmartPORTS, without Sensor <sup>19</sup> NX Networked Wireless Radio Module	U Universal Volta (120–277V)	age	F	RMB Residential Mounting Bars
DMT	<b>SpectraSync</b> 0–10V 5% <b>4</b>		NXRM2 and Bluetooth Programming, without Sensor <sup>15</sup>				

## TRIM

			7					1		1 1			Not	es:
NOR 3.5S			-	TRM	-	-				-			1	Available in 10 or 17 watt outputs
Series		Function		Trim		Reflect	or Flange Color	Reflect	or Insert Color		Lens		2	NHN available up to 17 watts. NHI available as 10 watts
NOR-3.5S		Shallow Housing		TRM Tr	rim		Flanged		Texture		SOL	Solite 9	3	Available with NR or LW optic only
	Recessed 3.5"	·				FWHS	White	RWH	White		CLR	Clear 9	4	DMT driver must be selected for use with 2765T
	Square	<b>DS</b> Downlight, Shallow				FGYS	DCV	Gray		FRS	Frosted 10	5	DL and AA performance based on	
		(5%"-11%" ceiling)				FBLS	Black	RBL RGT	Black		LIN	Linear		SOL lens with RWHS insert finish
		DD Downlight, Deep				FCOS			Graphite			Spread	6	Available only with FRS lens
		(1 1/4" ceiling only	- 1				Copper Anti-Microbial	RPP RGH	Pink Panache Grasshopper			$(10 \times 40^{\circ})^{9,11}$	7	Available only when LW functions selected
		LWS Lensed Wall				FAIVIVV	FAMW Anti-Microbial White  FX Custom Finish  Flangeless	KOII	Огаззпоррег		HEX	Louver 9, 12	8	Not available with LVE control
		Wash, Shallow				FX			Smooth		NON		9	Not available with LW function
								RWHS RGYS RBLS RCOS RAMW	White		NON		10	Available with all functions.
		Deep Housing Compatible				F			Gray				11	Must be selected with LW
		LWD Lensed Wall				FT	Flangeless		Black Copper				12	Available with DS only  Wet location not suitable for
		Wash, Deep				''	riangeless						12	HEX or NON
		<b>AA</b> Adjustable							White				13	Above ceiling access required
		Accent							0.1				14	Only available in 17 or 25 watt outputs
									Other				15	DM1 or ERP required with NX options
								RX	Custom Finish					