

COLT LBUL

LED BULLET

FEATURES

- Compact flood light with uniform 7x6 distribution
- Perfect for landscape lighting applications
- Durable 1/2" 14 NPS knuckle
- Easy to install by one person
- IP65 rating for durability in ground mounting applications



tradeSELECT®



SPECIFICATIONS

CONSTRUCTION

- Rugged die-cast aluminum housing
- Lens is made of UV stabilized acrylic

OPTICS

- Integral reflector optimizes efficiency
- Distribution is 7x6

INSTALLATION

- Suitable for ground mounting applications
- Standard knuckle is 1/2" x 14 NPS

ELECTRICAL

- Configurations for 120-277V applications
- 50/60 Hz power factor $\geq 90\%$

CERTIFICATIONS

- DLC® (DesignLights Consortium) Qualified. Please refer to the DLC (DLC) premium qualifications, consult DLC website for more details: <http://www.designlights.org/QPL>
- Fixture is IP65 rated
- Listed to UL1598 for use in wet location

WARRANTY

- 5 Year warranty

ORDERING INFORMATION

Catalog Number	Mounting	Distribution	Wattage	Voltage	Lumens	LPW	CCT/CRI	Weight lbs. (kg)
LBUL-20-3K	Knuckle	7 X 6	20	120-277	2632	132	3000K/70	1.54 (.07)
LBUL-20-4K	Knuckle	7 X 6	20	120-277	2901	145	4000K/70	1.54 (.07)

KEY DATA	
Lumen Range	2637-2690
Wattage	20
Efficacy Range (LPW)	132-134
Fixture Projected Life (Hours)	>60,000
Weight lbs. (kg)	1.54 (0.70)

COLT LBUL

MINI LED BULLET

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

PERFORMANCE DATA

SERIES NUMBER	SYSTEM WATTS	DISTRIBUTION TYPE	CCT/CRI	LUMENS	LPW	MAX CANDLE POWER
LBUL-20-3K	20	7 X 6	70/3000K	2632	132	1183
LBUL-20-4K	20	7 X 6	70/4000K	2901	145	1301

Lumen values are from photometric test performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown. Actual performance may differ as a result of end-user environment application and inherent performance balances of the electrical components.

PROJECTED LUMEN MAINTENANCE

Ambient Temp.	OPERATING HOURS					L70 Calculated (hours)
	0	25,000	TM-21-11 L96 36,000	50,000	100,000	
25°C / 77°F	1.00	0.95	0.92	0.89	0.80	153,000
40°C / 104°F	0.99	0.94	0.91	0.88	0.77	138,000

1 Projected per IESNA TM-21-11 * Data references the extrapolated performance projections for the base model in a 40°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08

LUMINAIRE AMBIENT TEMPERATURE FACTOR (LATF)


AMBIENT TEMPERATURE		LUMEN MULTIPLIER
0° C	32° F	1.03
10° C	50° F	1.01
20° C	68° F	1.00
25° C	77° F	1.00
30° C	86° F	0.99
40° C	104° F	0.98
50° C	122° F	0.97

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).


ELECTRICAL DATA

Nominal Wattage	INPUT VOLTAGE (V)	CURRENT (Amps)	SYSTEM POWER (w)
20	120	0.167	20
	208	0.096	20
	240	0.083	20
	277	0.072	20

PHOTOMETRY

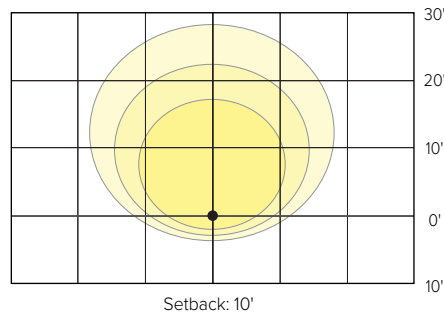

DIMENSIONS

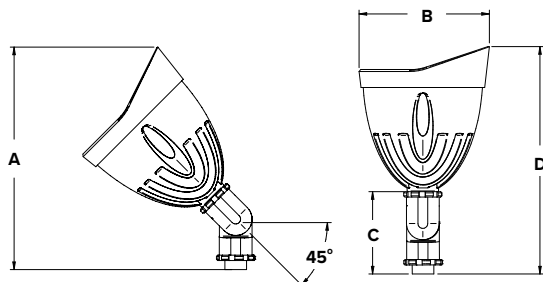

A	B	C	D	Weight
7.2" (185 mm)	4.3" (108 mm)	2.8" (72 mm)	7.6" (192 mm)	1.54lbs 0.70kg

USE OF TRADEMARKS AND TRADE NAMES

All product and company names, logos and product identifies are trademarks ™ or registered trademarks ® of Current or their respective owners. Use of them does not necessarily imply any affiliation with or endorsement by such respective owners.