

Nelo 70L

OPEN APERTURE PENDANT DIRECT

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

FEATURES

- Variable Intensity technology provides a range of specifiable outputs and resulting fixture wattages
- 1200 lumens max. See performance data table on page 4 for additional information
- 80 & 90 CRI (30, 35, 40K); Warm Dim (30–22K), Tunable White (27–65K & 27–50K)



CONTROL TECHNOLOGY



SPECIFICATIONS

CONSTRUCTION

- 2.5" x 3" nominal profile with 1.8" aperture.
- Extruded aluminum housing with machined aluminum end headers
- Die-cast aluminum end caps mechanically attached with no exposed fasteners. Open (ECO) and solid (ECC) designs available.
- Patent pending ConJoin™ row mounting system Remote driver enclosure constructed from die-formed steel.

OPTICS

- 3 SDCM CCT consistency, 80 or 90 CRI. Tunable White and Dim to Warm options available.
- 98% High reflectance laminated reflector for soft, continuous illumination. UV stable, UL 94 V rated.
- Additional reflector seam cover blends appearance for unbroken illumination in row mount configurations.

ELECTRICAL



- Variable Intensity (VI) technology allows precise specification of fixture output/wattage. Fixture will be programmed and labeled to specification.
- LED boards are field-serviceable from below through housing aperture.
- Remote enclosure requires above ceiling access to replace solid state constant current driver.
- 1C (1 Circuit) Fixture wired for a single circuit
- Emergency Battery: 6W battery powered driver. Provides a minimum of 90 minutes of emergency lighting. Inverter-Compatible. Provided by others. Available in 4'+ fixtures

INSTALLATION

- Suspension required at every row joint. 3/64" diameter field adjustable cables, ship separately.
- Pendant location at ends of rows (or individual fixtures) are 1" from fixture ends.
- Pendant attachment allows for horizontal adjustment to "fine-tune" leveling
- Remote enclosure not rated for contact with insulation. Insulation must be no closer than 3" from remote driver enclosure
- Remote enclosure installation may require additional junction boxes or plenum rated wire. See installation instructions for more information.
- Non-feed canopy covers 2" diameter (unless 5" non-feed cover specified).

CONTROLS

- Remote mounted sensors, for individual fixtures. For rows or additional information, contact factory.
- NX Lighting Controls provides options for standalone and networked integrated sensor with wired or wireless connectivity for NX system deployments
- SpectraSync™ Color Tuning Technology: Control your space based on the needs of the application, specific activities throughout the day and preferences of the occupants

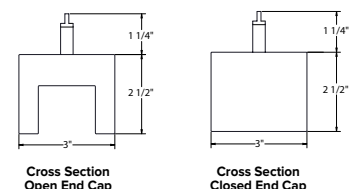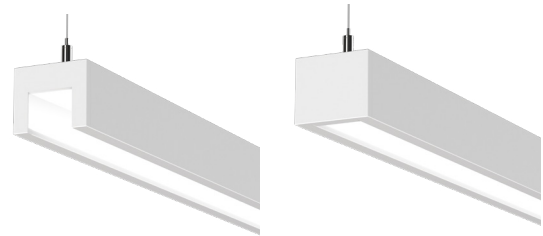

	Weight
70L-P-D	2 lbs/ft

CERTIFICATIONS

- CSA listed for damp locations
- UL924
- IBEW
- AF of L
- This product meets federal procurement law requirements under the Buy American Act (FAR 52.225-9) and Trade Agreements Act (FAR 52.225-11). See [Buy America\(n\) Solutions](#).
- Emergency Battery Backup options are California Energy Commission (CEC) Title 20 Compliant.

WARRANTY

- LED boards - 5 years
- LED drivers (standard) - 5 years
- LED drivers (Lutron) - 3 years

KEY DATA	
Lumen Range	300–1200
SDCM	3
Rated Life	L85 > 50,000 Hours
Efficacy	108–120 LPW

DATE:

LOCATION:

TYPE:

PROJECT:

CATALOG #:

ORDERING GUIDE

Example: 70L-P-D-8-08-C1-35K-D030-D01-1C-UNV-ECO-ED-FA1

CATALOG #

Series	Mounting	Distribution	Row Length (In Feet)	Max Length in Row	Finish/Color ¹	CCT/CRI ²
70L Nelo	P Pendant	D Direct	—' Enter in foot increments	02 2', 609mm	C1 Matte White (Default)	30K 3000K, 80CRI
				03 3', 914mm		30K9 3000K, 90CRI
				04 4', 1219mm	C2 Textured Matte White	35K 3500K, 80CRI
				05 5', 1524mm	C3 Light Silver	35K9 3500K, 90CRI
				06 6', 1829mm	C4 Machined Aluminum	40K 4000K, 80CRI
				08 8', 2438mm		40K9 4000K, 90CRI
					C5 Carbon Black	2230TD 2200K-3000K SpectraSync™ Dim-to-Warm ³
					C6 Textured Camera Black	
					CC Custom Color	2750T 2700K-5000K SpectraSync™ Tunable White ³
						2765T 2700K-6500K SpectraSync™ Tunable White ³

Direct Output/ft	Driver	Circuiting	Voltage	End Cap	Enclosure Mounting
D030 300 (Min) to D120 1200 (Max)	D01 1% Dimming, 0–10V D05 5% Dimming, 0–10V ⁴ LEC Hi-Lume 1% EcoSystem NDM Non-Dimming	1C 1 Circuit	UNV 120–277V 347 347V ⁵	ECO Open Style ECC Closed Style	ED Drywall & Other EG Grid

Suspension Kit ⁶	Nightlight ⁷	Emergency ⁸	Thru-Wiring	T-Bar Clips ⁹
FA1 Suspension Kit, 51" FA2 Suspension Kit, 87" FA3 Suspension Kit, 219" FA4 Suspension Kit, 363"	NL Nightlight Circuit Required. Enter quantity.	EF 6W Emergency Battery Backup. Enter quantity. (CEC Title 20 Compliant)	W1 No Thru-Wire W2 Provide Normal and NL/EF Thru-Wiring W3 Provide Normal Thru-Wiring Only	CB1 T-bar clip - 1½" CB2 T-bar clip - ¾" CB3 T-bar clip - ¾" SS

Notes:

1 Visit currentlighting.com/litecontrol for details.

2 SpectraSync must be ordered with D05 driver option

3 Additional factory supplied junction box required. Not compatible with NL option.

4 Must be ordered with SpectraSync options

5 Additional lead time may be applicable. Contact factory.

6 Add suffix /V to replace all 2" non-feed canopy covers with 5" canopy covers. FA1/V = 51" suspension kit w/ 5" canopies; canopies and feed cord are supplied in white regardless of fixture color unless otherwise specified.

7 2NL = 2 nightlight circuits/row

8 2EF = 2 Emergency batteries/row. See Details for restrictions. Provides a minimum of 90 minutes of emergency lighting. Inverter- Compatible. Provided by others. Available in 4+ fixtures. Additional factory supplied junction box required

9 Includes Luminaire Canopy Box.

10 Not available for row mounting. Only available with 0-10V Driver options. Contact factory for Length restrictions.

11 Refer to NX Integrated Controls Reference Table for Functionality of Options.

Control Options⁵

NX Networked – Wired	
NXE	NX Wired Dual RJ45 SmartPORTS, without Sensor ^{10,11}
NXERM	NX Wired Dual RJ45 SmartPORTS and Integral NXSMP2-LMI PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth® Programming ^{10,11}
NX Networked – Wireless	
NXW	NX Networked Wireless Radio Module NXRM2 and Bluetooth® Programming, without Sensor ^{10,11}
NXWRM	NX Networked Wireless Enabled Integral NXSMP2-LMI PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth® Programming ^{10,11}
Sensors	
BTSL	Bluetooth® Programmable, BTSMP-LMI PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens ¹⁰






Nelo 70L

OPEN APERTURE PENDANT DIRECT

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

CONTROLS OPTIONS AND FUNCTIONALITY



Control Option Ordering Logic & Description			Control Option Functionality										Control Option Components	
			Sensor	Networkable	Grouping	Scheduling	Occupancy/ Motion	Daylight Harvesting	0-10V Dimming	On/Off Control	Bluetooth® App Programming	Sensor Height		
NX Wired	NXE	NX Wired Dual RJ45 SmartPORTS, without Sensor	N/A	✓	✓	✓	–	–	✓	✓	Requires NXBTC dongle ¹	–		NXDSP
	NXERM	NX Wired Dual RJ45 SmartPORTS and Integral NXSMP2-LMI PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth® Programming	NXSMP2-LMI	✓	✓	✓	✓	✓	✓	✓		Max: 12'	 	NXSMP2-LMI NXDSP
NX Wireless	NXWRM	NX Networked Wireless Enabled Integral NXSMP2-LMI PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth® Programming	NXSMP2-LMI	✓	✓	✓	✓	✓	✓	✓		Max: 12'		NXSMP2-LMI
	NXW	NX Networked Wireless Radio Module NXRM2 and Bluetooth® Programming, without Sensor	N/A	✓	✓	✓	–	–	✓	✓	✓	–		NXRM2-H

¹ NXBTC needs to be plugged into an available NX SmartPort™ on the fixture network

CONTROLS TECHNICAL SUPPORT

1-800-888-8006 (7:00 am–7:00 pm est)

APP INFORMATION

NX Lighting Controls App



The NX Lighting Controls App is a free to use mobile application for programming both an NX Lighting Controls System or Standalone Bluetooth Sensors. The mobile app allows you to configure devices, discover and setup wireless enabled luminaires and program your NX system settings.



Android



Apple iOS

NX Connect App



The NX Connect mobile App is a free to use mobile application for programming a NX Connect System. The mobile App allows you to discover, configure and share your NX Connect system.



Apple iOS

SPECTRASYNCH™ COLOR TUNING TECHNOLOGY:

Control your space based on the needs of the application, specific activities throughout the day and preferences of the occupants with distinct SpectraSync™ Color Tuning Technologies.



SPECTRASYNCH Color tuning technology		
Mode	Kelvin Range	Description
Dim to Warm	2200K–3000K	Mimics the familiar warming effect that occurs with traditional incandescent sources as they are dimmed
Tunable White	2700K–5000K 2700K–6500K	Offers users the ability to tailor CCT to their personal preference, enhancing task visibility, material and colors or the aesthetics of the space
Scheduled White	2700K-5000K 2700K-6500K	Mimics the rhythm of natural light or follows an alternative user-defined schedule throughout the day, enhancing an occupant's mood and well-being

Nelo 70L

OPEN APERTURE PENDANT DIRECT

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	


CONTROLS OPTIONS AND FUNCTIONALITY (CONTINUED)

SPECTRASync TUNABLE WHITE

Available in two options: 2750T (2700K–5000K) or 2765T (2700K–6500K).

Requires two 0–10V controllers, one for intensity and one for CCT.

Minimum 5% dimming.

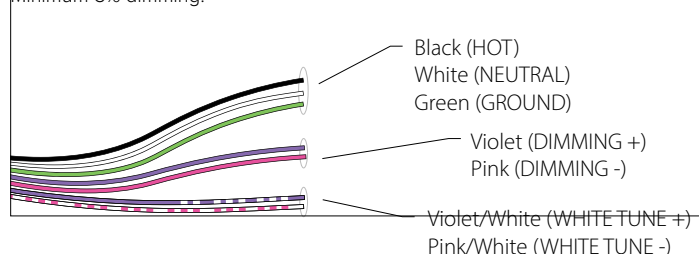


SpectraSync Tunable White luminaires are provided with two 0–10V circuits. The violet and pink circuit is for wiring to any qualified 0–10V controller for dimming. The violet/white and pink/white circuit is for wiring to any qualified 0–10V controller for Tunable White CCT control.

CONTROLLER MANUFACTURER DATA

SpectraSync Tunable White was designed to be used with sinking style dimmers (provided by others) and is compatible with:

- Hubbell Control Solutions (HCS): NX Lighting Controls Room Controllers (NXRC) and In-fixture Controllers (NXFM)
- Lutron: DDTV, DVSTV, and NFTV dimmers
- Wattstopper: ADF120277 and CD4BL (Titan) dimmers

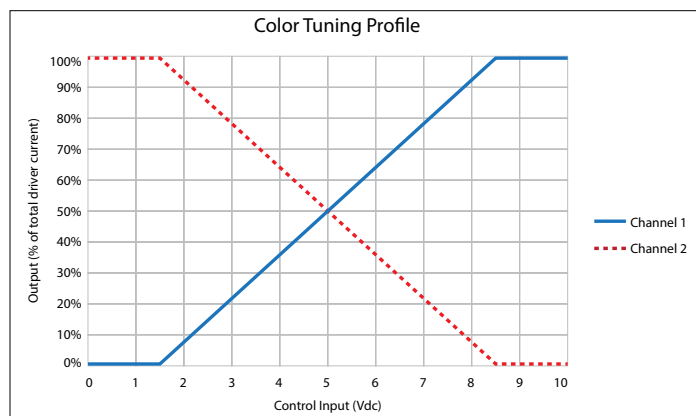

To enable scheduling and for use with NX wall control preset stations please refer to Hubbell Control Solutions NX SpectraSync technical sheet.

PERFORMANCE DATA TABLE

The table below shows the delivered lumens for the various lumen outputs. Use this chart in connection with the output multiplier capability to deliver any output required.

Nomenclature	Lumens/Ft	W/Ft	Efficacy
D030 (min)	300	2.8	108
D035	350	3.2	110
D040	400	3.5	115
D045	450	3.9	116
D050	500	4.2	118
D055	550	4.7	117
D060	600	5.1	118
D065	650	5.5	118
D070	700	5.8	120
D075	750	6.3	118
D080	800	6.7	119
D085	850	7.2	117
D090	900	7.8	116
D095	950	8.3	115
D100	1000	8.7	115
D105	1050	9.1	116
D110	1100	9.6	115
D115	1150	10.1	114
D120 (max)	1200	10.5	114

OUTPUT RESTRICTIONS

Driver options listed below are not available for the output and length as shown.


LENGTH	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	
70L (Direct)																				
All	347V D01, D05											D05 + NX, 347 D01								
	347 + NX							347 + NX												

OUTPUT MULTIPLIER TABLE

Photometrics for the 70L are published here at a nominal 3500K temperature. This table may be used to approximate the lumen values at different Kelvin temperatures. Power consumption would stay the same.

CCT	80 CRI	90 CRI
3000K	0.98	0.85
3500K	1	0.88
4000K	1.03	0.9

DIMENSIONS

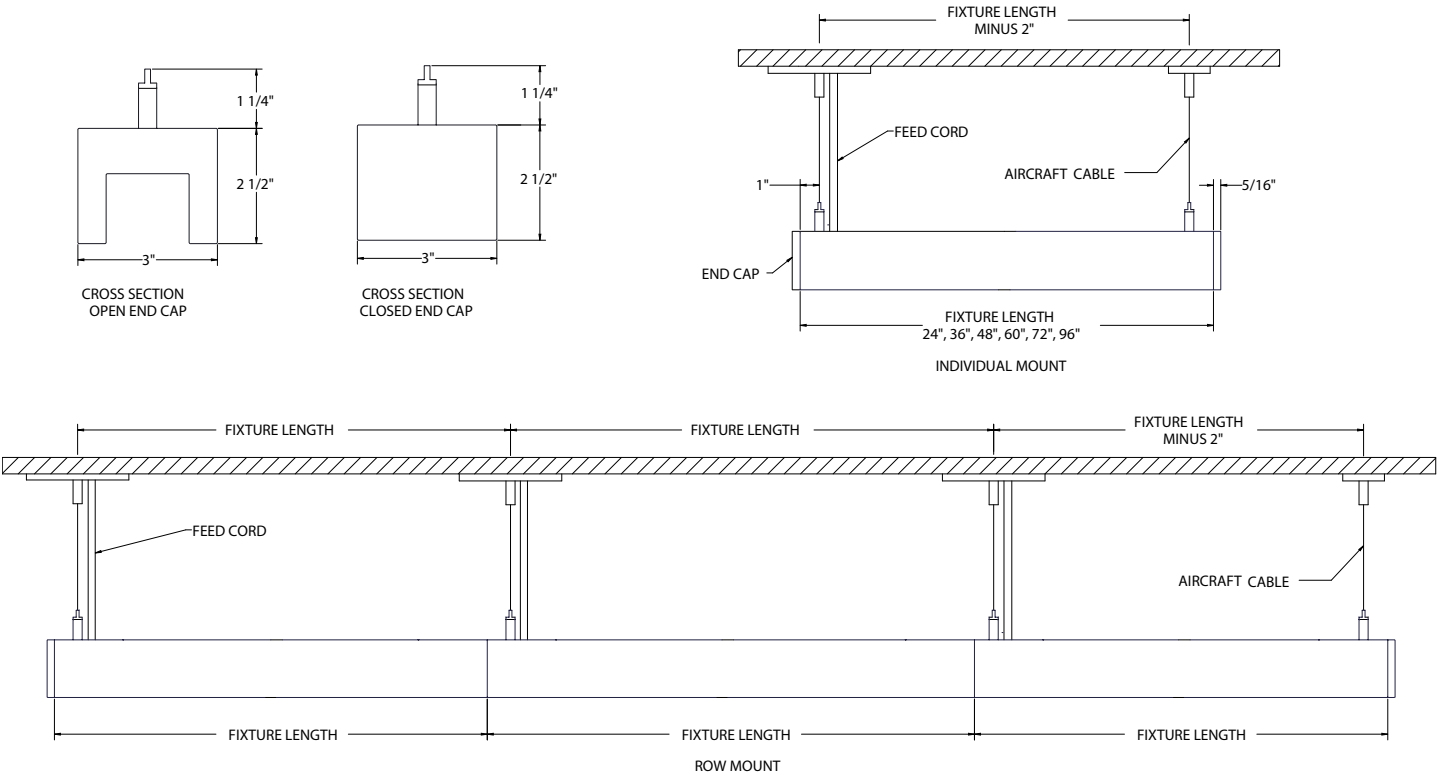

Nelo 70L

OPEN APERTURE PENDANT DIRECT

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	



DIMENSIONS (CONTINUED)

REMOTE ENCLOSURE

Drivers for this product must be remote-mounted in an accessible location. Remote driver enclosure not intended for contact with insulation (IC). Insulation must be minimum 3" from drivers and enclosure, in all directions. Driver enclosure is die formed galvanized steel rated for 25°C ambient. Driver enclosures are configured to Grid Mount (EG) or Drywall & Other (ED). When grid ceiling mount, enclosure attaches to the T-Bar with factory installed caddy clips. For drywall (or other) mount applications, driver enclosure configured with mounting holes to secure to blocking (by others).

Every fixture section will come with at minimum (1) driver enclosure, and at minimum (1) factory installed Class 2 feed cord. Plenum rated cable (by others) required between enclosure and feed cord. See tables below.

See installation instructions for additional information.

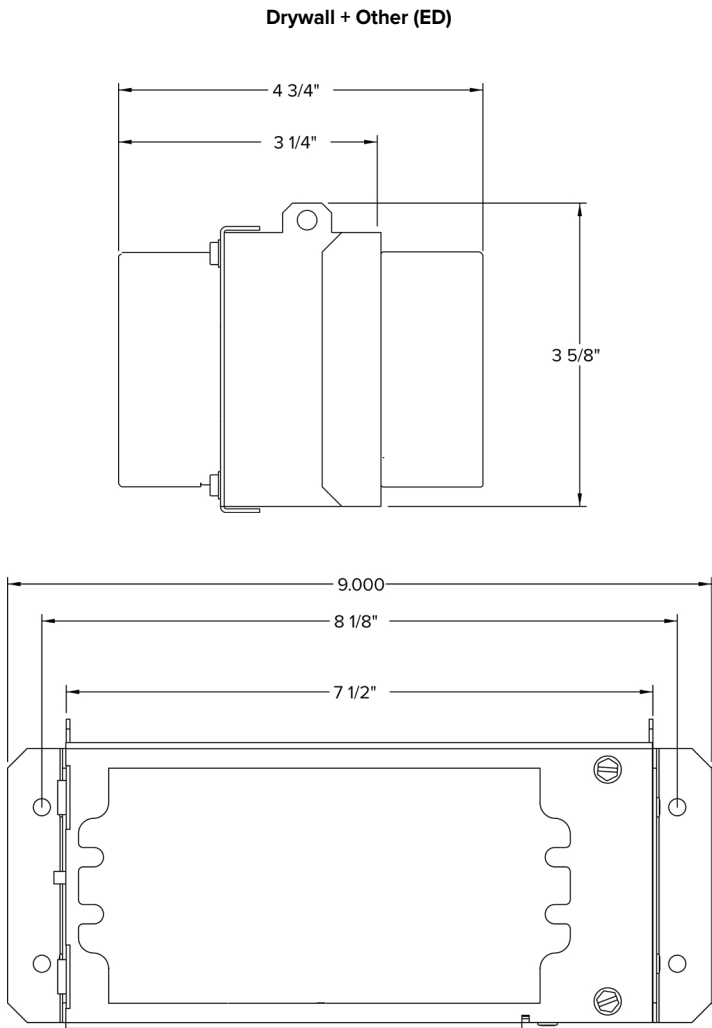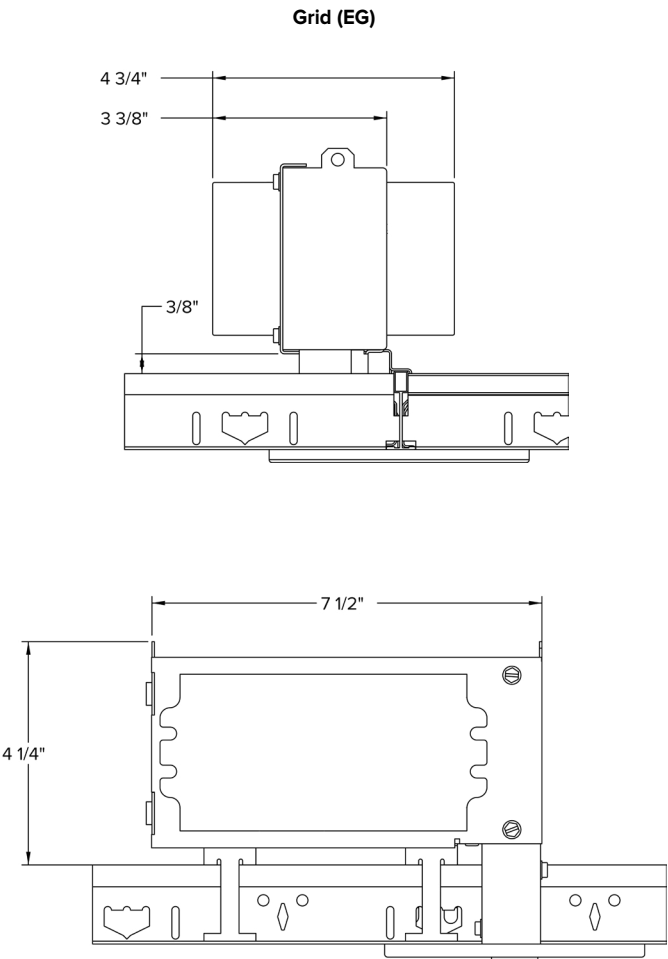

Max Mounting Distance*	
Wire Gauge	Distance (Ft.)
18	33
16	53
14	84
12	134

Enclosure Size & Count	
2	Indirect/Direct with Emergency (EF)
1	All other configurations

*Mounting distance shown is total between luminaire and remote enclosure.

Nelo 70L

OPEN APERTURE PENDANT DIRECT

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

PHOTOMETRY

70L-X-D-4-CX-35K-D120-ECC


LUMINAIRE DATA

Test No.	Scaled from P21.01220
Description	70L Nelo Closed End Cap Direct
Delivered Lumens	4800
Watts	42W
Efficacy	114

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-40	1981.83	41.3
0-60	3591.8	74.8
0-90	4800	100
0-180	4800	100

POLAR GRAPH

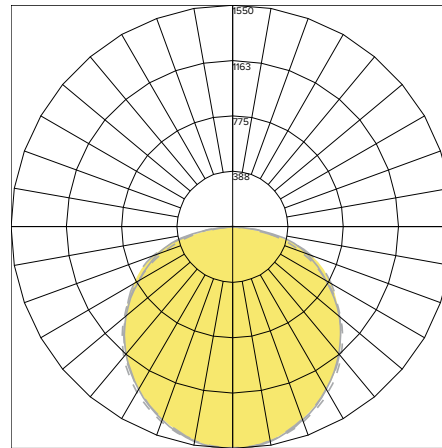

LEGEND:
0-deg: - - - - -
45-deg: - - - - -
90-deg: - - - - -

ADDITIONAL INFORMATION

DIMMING OPTIONS

D01	100%–1% dimming range. Fixture will be wired for low voltage 0–10V dimming control.
D05	100%–5% dimming range, Fixture will be wired for low voltage 0–10V dimming control. Only applicable if either 2230TD, 2750T or 2765T is selected.
LEC	Hi-Lume 1% EcoSystem LED Driver with Soft-On, Fade-to-Black dimming technology.
NDM	Non-dimming. Fixture will be wired for fixed light output.

Rated Life

Tested in accordance to LM79-2008 & derived from EPA TM-21 calculator

L70: >54,000 (calculated per TM-21 extrapolated curve)

L70: 110000 (reported per TM-21/LM80 6x's limitation)

L85: >50000 (calculated per TM-21 extrapolated curve)

L85: 50500 (reported per TM-21/LM80 6x's limitation)

Rated Life (Driver)

Standard = 100,000 hours

Lutron = 50,000 hours

70L-P-D WITH CLOSED END CAP AND NXWRM WIRELESS CONTROL OPTION

