


**ORDERING GUIDE** INDIRECT / DIRECT, DIRECT, OR INDIRECT

Gray Highlighting

= 10 Day Quick Ship Program

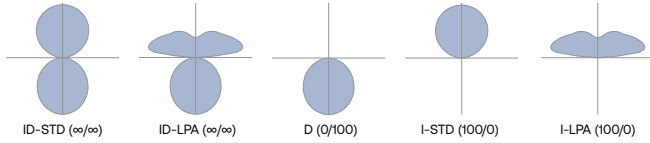

**Example:** STNC-PL-P-ID-LPA-24-8-SOF-WHS-35K9-I050-DO80-D01-2C-UNV-FA1

CATALOG # \_\_\_\_\_

STNC	P	Fixture Distribution	Indirect Optics <sup>1</sup>	Row Length	Max Length in Row	Direct Diffuser <sup>2</sup>	Finish
Series	Profile	Mounting					
STNC	PL Plank AR Arc	P Pendant	ID Indirect/Direct D Direct (0/100) I Indirect(100/0)	STD Standard LPA Low Peak Angle	' Enter in foot increments 2 2' 3 3' 4 4' 6 6' 8 8'	SOF Soft Diffuse Lens	WHS White, Smooth (C1) GYS Gray, Smooth (C4) BLS Black, Smooth (C5) CC Custom Color

CCT/CRI	Indirect Output <sup>1,5</sup>	Direct Output <sup>2,5</sup>	Dimming	Circuiting	Voltage	Suspension Kit <sup>7</sup>
27K9 2700K, 90CRI 30K9 3000K, 90CRI 35K9 3500K, 90CRI 40K9 4000K, 90CRI 50K9 5000K, 90CRI 2765T 2700-6500K Tunable White, 90CRI <sup>3,4</sup>	I015 150 (min) to I190 1900 (max)	DO15 150 (min) to D190 1900 (max)	DO1 1% 0-10V DO5 5% 0-10V NDM Non-Dimming LEC 1% Lutron Hi-Lume EcoSystem <sup>3</sup> DALIP DALIP <sup>3</sup> SEN For use with Sensors	1C Single Circuit 2C Dual Circuit (Uplight/Downlight)	UNV Universal (120V-277V) 347 347V <sup>3,6</sup>	FA1 Suspension Kit, 51" FA2 Suspension Kit, 87" FA3 Suspension Kit, 219" FA4 Suspension Kit, 363" P Swivel Stem Kit, 36"

**OPTIONAL**

Nightlight	Emergency <sup>8</sup>	Additional Lensing
NL Nightlight Circuit Required. Enter quantity. 2NL = 2 nightlight circuits/row	EF 10W Emergency Battery Pack (CEC Title 20 Compliant) Enter quantity. 2EF = 2 emergency batteries/row	DCC Clear Acrylic Dust Cover <sup>1</sup> DCF Frosted Acrylic Dust Cover <sup>1</sup> VCD Visual Comfort Diffuser <sup>2</sup>

Controls & Sensors <sup>3,9</sup>	
<b>NX Networked - Wireless<sup>10</sup></b>	
<b>NXWSM</b>	NX Networked Wireless Enabled Integral NXSMP2-SMI PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth® Programming
<b>NXCS</b>	NX Connect NX-C-WIZ20 Wireless Indoor Occupancy and Photocell Sensor
<b>Other</b>	
<b>ODPG</b>	OCC/DLH w Group Philips SNS200
<b>ODWG</b>	Wattstopper LMFS-601

**Notes:**

- Compatible with I or ID distributions.
- Compatible with D or ID distributions.
- Additional lead time may be applicable. Consult factory.
- Must be ordered with D05 dimming.
- Specifiable in 50 lumen increments. Reference the Performance Data Table for full performance offering and exceptions.
- Compatible with D01, D05, NDM, SEN. Excludes EF option.
- Add suffix /V to replace all 2" non-feed canopy covers with 5" canopy covers. FA1/V = 51" suspension kit w/ 5" canopies; canopies and feed cord are supplied in white regardless of fixture color unless otherwise specified.
- EF - 10W battery powered driver. Provides a minimum of 90 minutes of emergency lighting.
- Submit drawings required for row configurations.
- Refer to NX Integrated Controls Reference Table for Functionality of Options.