LED Lamps - General Purpose

Decorative Lamps

Decorative LED lamps feature LED "filaments" in glass bulbs, mimicking a traditional decorative lamp look. This creates better light distribution and adds more brilliance to decorative fixtures where the lamp is visible, such as chandeliers, pendants, and sconces. Various shapes, bases and wattages are available in clear and white finishes.

PERFORMANCE HIGHLIGHTS:

CANDLES	
Light Output:	200-500 Lumens
CRI:	80, 90
CCT:	2700K
Selectable CCT:	2700K/3000K/3500K/4000K/5000K
Dim-to-Warm CCT:	3000K (dims to 2000K)
Input Voltage	120V
Efficiency	Up to 100 LPW
Wattage:	2.5-5W
Life:	15,000 hours L70
Temperature Rating:	-20° to 40° C
Rating:	Damp
Dimming:	Dims from 100% to 10%

GLOBES	
Light Output:	250-500 Lumens
CRI:	80, 90
CCT:	2700K
Selectable CCT:	2700K/3000K/3500K/4000K/5000K
Dim-to-Warm CCT:	3000K (dims to 2000K)
Input Voltage	120V
Efficiency	Up to 100 LPW
Wattage:	2.8-5W
Life:	15,000 hours L70
Temperature Rating:	-20° to 40° C
Rating:	Damp
Dimming:	Dims from 100% to 10%

LIMITED WARRANTY

3 Years

FEATURES:

- Glass bulbs with LED "filaments" provide more traditional look
- Lasts 10X longer than incandescent (15,000 vs. 1,500 hours)
- These lamps are energy efficient, contain no lead or mercury, and are compliant with material restriction requirements of RoHS
- Selectable filament lamps:
  - SpectraChoice™: Choose between five color temperature levels to achieve the desired tone of white light
- Adjustments can be made with the built-in switches on the base of the lamps, no tools required
- Dim-to-Warm lamps: Dimming the lamps creates a warmer CCT, from 3000K down to 2000K

BENEFITS:

- Energy + Cost Savings
- For example, using only 5 watts of energy, save over $90 in energy costs over the rated life of a lamp versus a standard 60-watt incandescent lamp based on $0.11 per kWhs
- Energy efficiency and long life mean fewer lamp replacements
- Title 20 Compliant options
- SpectraChoice™:
  - Use one lamp for many applications, simplifying project management by streamlining BOMs
  - One lamp can replace many, greatly reducing inventory

LEARN MORE:

To learn more about saving money and energy, go to www.LED.com.

© 2026 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

Decorative Lamps

CUSTOMER NAME
PROJECT NAME
DATE NOTES

Selectable SpectraChoice™ Filament Decorative Lamps

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty[2]	MOL (in)	Lumens (Initial)	Selectable Color Temp. (Initial)*	CRI	Wattage Replacement	Rated Life L70 (Hrs)[1]	Dimmable	Location Rating[3]	Additional Information
Candles - CA															
	E26	3.5	93325817	LED4DFCAM-C/9SC	120	12	4.4	300	2700K* 3000K 3500K 4000K 5000K	90	40	15,000	Yes	Damp	CEC Title 20, Clear
	E12	3.5	93325663	LED4DFCAC-C/9SC	120	12	4.7	300	2700K* 3000K 3500K 4000K 5000K	90	40	15,000	Yes	Damp	CEC Title 20, Clear
	E12	3.5	93325791	LED4DFCAC-W/9SC	120	12	4.7	300	2700K* 3000K 3500K 4000K 5000K	90	40	15,000	Yes	Damp	CEC Title 20, White
	E12	5	93325792	LED5DFCAC-C/9SC	120	12	4.7	500	2700K* 3000K 3500K 4000K 5000K	90	60	15,000	Yes	Damp	CEC Title 20, Clear
	E12	5	93325816	LED5DFCAC-W/9SC	120	12	4.7	500	2700K* 3000K 3500K 4000K 5000K	90	60	15,000	Yes	Damp	CEC Title 20, White
Globes - G25															
	E26	5	93325818	LED5DFG25-C/9SC	120	12	4.7	500	2700K* 3000K 3500K 4000K 5000K	90	60	15,000	Yes	Damp	CEC Title 20, Clear
	E26	5	93325819	LED5DFG25-W/9SC	120	12	4.7	500	2700K* 3000K 3500K 4000K 5000K	90	60	15,000	Yes	Damp	CEC Title 20, White

SpectraChoice™

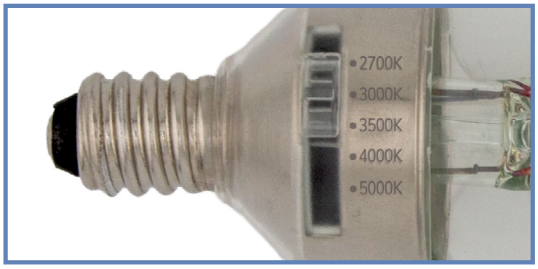

Select color temperature using built-in switch on candelabra (E12) base

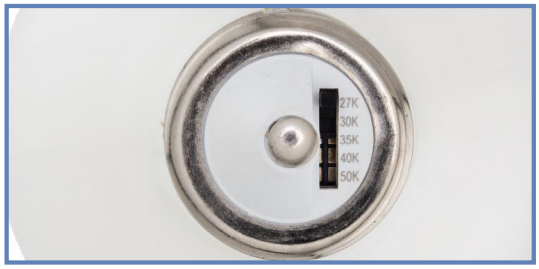

Select color temperature using built-in switch on medium (E26) base

[1] The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)
[2] Minimum order quantity = Carton Qty
[3] UL 1993 Environmental Requirements for LED LAMPS
Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations
* Default color temperature settings noted by "*" in tables above.

© 2026 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

Decorative Lamps

CUSTOMER NAME
PROJECT NAME
DATE NOTES

Dim-to-Warm Filament Decorative Lamps

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty[2]	MOL (in)	Lumens (Initial)	Color Temp. (Dim-to-Warm)	CRI	Wattage Replacement	Rated Life L70 (Hrs)[1]	Dimmable	Location Rating[3]	Additional Information
A15															
A15	E26	4.5	93324912	LED4DFA15-C/930W	120	12	3.5	450	3000K (Dims to 2000K)	90	40	15,000	Yes	Damp	CEC Title 20, Clear, Dim-to-Warm
	E26	4.5	93324913	LED4DFA15-W/930W	120	12	3.5	450	3000K (Dims to 2000K)	90	40	15,000	Yes	Damp	CEC Title 20, White, Dim-to-Warm
A19															
A19	E26	8	93324919	LED8DFA19-C/930W	120	12	4.3	800	3000K (Dims to 2000K)	90	60	15,000	Yes	Damp	CEC Title 20, Clear, Dim-to-Warm
	E26	8	93324920	LED8DFA19-W/930W	120	12	4.3	800	3000K (Dims to 2000K)	90	60	15,000	Yes	Damp	CEC Title 20, White, Dim-to-Warm
ST19															
ST19	E26	8	93324923	LED8DFST19-C/930W	120	12	5	800	3000K (Dims to 2000K)	90	60	15,000	Yes	Damp	CEC Title 20, Clear, Dim-to-Warm
Candles															
B11	E26	4.5	93324914	LED4DFBM-C/930W	120	12	3.5	450	3000K (Dims to 2000K)	90	40	15,000	Yes	Damp	CEC Title 20, Clear, Dim-to-Warm
	E12	4.5	93324915	LED4DFBC-C/930W	120	12	3.9	450	3000K (Dims to 2000K)	90	40	15,000	Yes	Damp	CEC Title 20, Clear, Dim-to-Warm
Globes - G16.5															
G16.5	E12	4.5	93324918	LED4DFG16C-C/930W	120	12	3.4	450	3000K (Dims to 2000K)	90	40	15,000	Yes	Damp	CEC Title 20, Clear, Dim-to-Warm
Globes - G25															
G25	E26	8	93324921	LED8DFG25-C/930W	120	12	4.6	800	3000K (Dims to 2000K)	90	60	15,000	Yes	Damp	CEC Title 20, Clear, Dim-to-Warm
	E26	8	93324922	LED8DFG25-W/930W	120	12	4.6	800	3000K (Dims to 2000K)	90	60	15,000	Yes	Damp	CEC Title 20, White, Dim-to-Warm
Globes - G40															
G40	E26	8	93324916	LED8DFG40-C/930W	120	12	7	800	3000K (Dims to 2000K)	90	60	15,000	Yes	Damp	CEC Title 20, Clear, Dim-to-Warm
	E26	8	93324917	LED8DFG40-W/930W	120	12	7	800	3000K (Dims to 2000K)	90	60	15,000	Yes	Damp	CEC Title 20, White, Dim-to-Warm

A15

A19

ST19

B11

G16.5

G25

G40

[1] The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)
[2] Minimum order quantity = Carton Qty
[3] UL 1993 Environmental Requirements for LED LAMPS
Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

© 2026 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

LED Lamps - General Purpose

Decorative Lamps

CUSTOMER NAME
PROJECT NAME
DATE NOTES

90 CRI Decorative Lamps - Fixed CCT

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty[2]	MOL (in)	Lumens (Initial)	Color Temp. (Initial)	CRI	Wattage Replacement	Rated Life L70 (Hrs)[1]	Dimmable	Location Rating[3]	Additional Information
Vintage															
CA/B	E26	3.5	93311960	LED4DFCAM-C/927	120	12	4.4	300	2700K	90	40	15,000	Yes	Damp	All Glass, Clear, Bent Tip, CEC Title 20
	E12	3.5	93312028	LED4DFCAC-C/927	120	12	4.6	300	2700K	90	40	15,000	Yes	Damp	All Glass, Clear, Bent Tip, CEC Title 20
G25	E26	4	93311963	LED4DFG25-C/927	120	12	4.7	350	2700K	90	40	15,000	Yes	Damp	All Glass, Clear, CEC Title 20
	E26	4	93311966	LED4DFG25-W/927	120	12	4.7	350	2700K	90	40	15,000	Yes	Damp	All Glass, White, CEC Title 20

Decorative Lamps

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty[2]	MOL (in)	Lumens (Initial)	Color Temp. (Initial)	CRI	Wattage Replacement	Rated Life L70 (Hrs)[1]	Dimmable	Location Rating[3]	Additional Information
Candles															
CA/B	E26	2.5	93142804	LED3DFCAM-C-2PK	120	12	4.4	200	2700K	80	25	15,000	Yes	Damp	All Glass, Clear, Bent Tip, 2 pack
	E26	2.5	93142808	LED3DFCAM-W-2PK	120	12	4.4	200	2700K	80	25	15,000	Yes	Damp	All Glass, White, Bent Tip, 2 pack
	E26	3.5	93142811	LED4DFBM-C-2PK	120	12	3.8	300	2700K	80	40	15,000	Yes	Damp	All Glass, Clear, 2 pack
	E26	3.5	93142814	LED4DFBM-W-2PK	120	12	3.8	300	2700K	80	40	15,000	Yes	Damp	All Glass, White, 2 pack
	E26	3.5	93142812	LED4DFCAM-C-2PK	120	12	4.4	300	2700K	80	40	15,000	Yes	Damp	All Glass, Clear, Bent Tip, 2 pack
	E26	3.5	93142815	LED4DFCAM-W-2PK	120	12	4.4	300	2700K	80	40	15,000	Yes	Damp	All Glass, White, Bent Tip, 2 pack
	E26	5	93142855	LED5DFBM-C-2PK	120	12	3.8	500	2700K	80	60	15,000	Yes	Damp	All Glass, Clear, 2 pack
	E26	5	93142856	LED5DFBM-W-2PK	120	12	3.8	500	2700K	80	60	15,000	Yes	Damp	All Glass, White, 2 pack
	E26	5	93142851	LED5DFCAM-C-2PK	120	12	4.4	500	2700K	80	60	15,000	Yes	Damp	All Glass, Clear, Bent Tip, 2 pack
	E26	5	93142852	LED5DFCAM-W-2PK	120	12	4.4	500	2700K	80	60	15,000	Yes	Damp	All Glass, White, Bent Tip, 2 pack
	E12	2.5	93142792	LED3DFCAC-C-2PK	120	12	4.6	200	2700K	80	25	15,000	Yes	Damp	All Glass, Clear, Bent Tip, 2 pack
	E12	2.5	93142793	LED3DFCAC-W-2PK	120	12	4.6	200	2700K	80	25	15,000	Yes	Damp	All Glass, White, Bent Tip, 2 pack
	E12	3.5	93142794	LED4DFBC-C-2PK	120	12	3.9	300	2700K	80	40	15,000	Yes	Damp	All Glass, Clear, 2 pack
	E12	3.5	93142796	LED4DFBC-W-2PK	120	12	3.9	300	2700K	80	40	15,000	Yes	Damp	All Glass, White, 2 pack
	E12	3.5	93142797	LED4DFCAC-W-2PK	120	12	4.6	300	2700K	80	40	15,000	Yes	Damp	All Glass, White, Bent Tip, 2 pack
	E12	5	93142801	LED5DFCAC-W-2PK	120	12	4.6	500	2700K	80	60	15,000	Yes	Damp	All Glass, White, Bent Tip, 2 pack
Globes															
G25	E26	2.8	93142805	LED3DFG25-C-2PK	120	12	4.7	250	2700K	80	25	15,000	Yes	Damp	All Glass, Clear, 2 pack
	E26	2.8	93142807	LED3DFG25-W-2PK	120	12	4.7	250	2700K	80	25	15,000	Yes	Damp	All Glass, White, 2 pack
	E26	4	93142847	LED4DFG25-C-2PK	120	12	4.7	350	2700K	80	40	15,000	Yes	Damp	All Glass, Clear, 2 pack
	E26	4	93142846	LED4DFG25-W-2PK	120	12	4.7	350	2700K	80	40	15,000	Yes	Damp	All Glass, White, 2 pack
	E26	5	93142850	LED5DFG25-C-2PK	120	12	4.7	500	2700K	80	60	15,000	Yes	Damp	All Glass, Clear, 2 pack
	E26	5	93142849	LED5DFG25-W-2PK	120	12	4.7	500	2700K	80	60	15,000	Yes	Damp	All Glass, White, 2 pack
	E12	4	93142798	LED4DFG16C-C-2PK	120	12	3.4	350	2700K	80	40	15,000	Yes	Damp	All Glass, Clear, 2 pack

Vintage Style Decorative Lamps

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty[2]	MOL (in)	Lumens (Initial)	Color Temp. (Initial)	CRI	Wattage Replacement	Rated Life L70 (Hrs)[1]	Dimmable	Location Rating[3]	Additional Information
Vintage															
A15	E26	3	93311928	LED3DFA15-C-VTG	120	12	3.5	150	2150K	90	25	15,000	Yes	Damp	All Glass, Clear Amber, CEC Title 20 Exempt
ST19	E26	5.5	93311890	LED5DFST19-C-VTG	120	12	5.3	400	2150K	90	40	15,000	Yes	Damp	All Glass, Clear Amber, CEC Title 20 Exempt

[1] The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)
[2] Minimum order quantity = Carton Qty
[3] UL 1993 Environmental Requirements for LED LAMPS
Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

© 2026 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.