



LED Lamps - Plug-in



Type A - 2-pin Plug-in Lamps

Current's Type A LED Plug-in lamps are direct replacements for pin-based compact fluorescent lamps. These lamps operate from CFL ballasts. Horizontal and vertical orientation lamps are offered in order to minimize energy consumption and improve fixture efficiency.



SpectraChoice

PERFORMANCE HIGHLIGHTS:

Type A 2-pin Plug-in Lamps	
Light Output Range:	500-1100 Lumens
CRI:	80
Selectable CCT:	2700K, 3000K, 3500K & 4000K
Efficiency:	Up to 104 LPW
Wattage:	5W - 10.5W
Life:	50,000 hours L70
Temperature Rating:	-20°C to 45°C
Location Rating:	Damp

LIMITED WARRANTY

5 years

FEATURES:

- SpectraChoice™ Type A Plug-ins offer selectable color temperature options
- Runs off compact fluorescent ballast
- Lasts 5X longer than CFL - 50,000 hours rated life (L70)
- These lamps are energy efficient, contain no lead or mercury, and are compliant with material restriction requirements of RoHS

BENEFITS:

Energy + Cost Savings

- Uses 50% less energy than CFL
- 10.5W LED saves over \$41 in energy vs 18 watt CFL based on \$0.11 per kWh over the rated life of the lamp
- Energy efficiency and long life mean fewer lamp replacements versus CFL light sources
- Reduce inventory and optimize solutions with SpectraChoice™ selectable Type A Plug-ins

LEARN MORE:

To learn more about saving money and energy, go to www.LED.com.



Selectable **LED Lamps**

Do more with less.

- *Reduce Inventory*
- *Simplify Projects*
- *Optimize Solutions*



LED Lamps - Plug-in

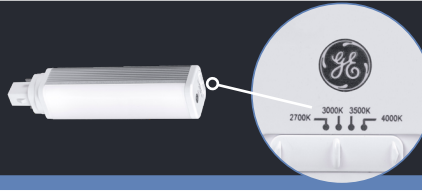

Type A - 2-pin Plug-in Lamps

CUSTOMER NAME _____

PROJECT NAME _____



DATE _____

NOTES _____



SpectraChoice™

Selectable SpectraChoice™ Type A - 2-pin Plug-In Lamps

Bulb Shape	Base Type	Lamp Watts	Order Code	Description	Carton Qty ²	MOL (In)	Lumens (Initial) ⁵	Color Temp* (Initial)	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	DLC ⁴	Location Rating ³	Additional Information [^]
Vertical Type A G24d 2-pin														
	G24d	10.5	93300091	LED1G24d-V/8SC-4PK	24	6.2	1000	2700K	80	13/18/26	50,000	-	Damp	SpectraChoice™ Selectable Color Temperature (4000K Default), Requires Magnetic Ballast, Fully Enclosed, 4 pack
							1100	3000K						
							1100	3500K						
							1100	4000K						
Horizontal Type A G24d 2-Pin														
	G24d	10.5	93300090	LED1G24d-H/8SC-4PK	24	6.6	1000	2700K	80	13/18/26	50,000	-	Damp	SpectraChoice™ Selectable Color Temperature (4000K Default), Requires Magnetic Ballast, Fully Enclosed, 4 pack
							1100	3000K						
							1100	3500K						
							1100	4000K						

Type A - 2-pin Plug-In Lamps

Bulb Shape	Base Type	Lamp Watts	Order Code	Description	Carton Qty ²	MOL (In)	Lumens (Initial) ⁵	Color Temp* (Initial)	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	DLC ⁴	Location Rating ³	Additional Information [^]
Type A GX23 2-pin														
	GX23	5	91404	LED5GX23/827	6	6.7	500	2700K	80	13	50,000	-	Damp	Requires Magnetic Ballast, Fully Enclosed
	GX23	5	91405	LED5GX23/830	6	6.7	530	3000K	80	13	50,000	-	Damp	Requires Magnetic Ballast, Fully Enclosed
	GX23	5	91407	LED5GX23/835	6	6.7	545	3500K	80	13	50,000	-	Damp	Requires Magnetic Ballast, Fully Enclosed
	GX23	5	91408	LED5GX23/840	6	6.7	560	4000K	80	13	50,000	-	Damp	Requires Magnetic Ballast, Fully Enclosed
	GX23	5	91410	LED5GX23/850	6	6.7	565	5000K	80	13	50,000	-	Damp	Requires Magnetic Ballast, Fully Enclosed
Vertical Type A G24d 2-pin														
	G24d	10.5	92988	LED1HG24d-V/835	6	6.2	1050	3500K	80	13/18/26	50,000	-	Damp	Requires Magnetic Ballast, Fully Enclosed
	G24d	10.5	92996	LED1HG24d-V/840	6	6.2	1050	4000K	80	13/18/26	50,000	-	Damp	Requires Magnetic Ballast, Fully Enclosed

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

² Minimum order quantity = Carton Qty

³ UL 1993 Environmental Requirements for LED LAMPS

Damp Location - Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

⁴ DLC* does not have a category for two-pin plug-in lamps

⁵ Lumen levels correspond with color temperature for selectable lamps

* Default color temperature setting is 4000K for selectable lamps

[^] Check ballast compatibility at LED.com/LED2pin-compatibility

Type A - 2-pin Plug-ins

