



## Type-A Plug-in Lamps

Current offers LED reflector lamps for all of your recessed can and downlighting application needs in the restaurant, hospitality and property management sectors



**SpectraChoice™**

### PERFORMANCE HIGHLIGHTS:

SpectraChoice™ Type A 4-pin Plug-in Lamp	
<b>Light Output Range:</b>	1000-1100 Lumens
<b>CRI:</b>	80
<b>Selectable CCT:</b>	2700K, 3000K, 3500K & 4000K
<b>Efficiency:</b>	Up to 122 LPW
<b>Wattage:</b>	9W
<b>Life:</b>	50,000 hours L70
<b>Temperature Rating:</b>	-20°C to 40°C
<b>Location Rating:</b>	Damp

### FEATURES:

- Select color temperature with built-in switch, no tool required
- Fits in 4-pin G24q sockets
- Operates from electronic ballasts
- Directional light output for improved fixture efficiency
- Lasts 2.5x longer than CFL
- These lamps are energy efficient, contain no lead or mercury and are compliant with material restriction requirements of RoHS


### BENEFITS:

#### Energy + Cost Savings

- For example, using only 9 watts of energy, save over \$90 in energy costs over the rated life of the lamp versus a standard 26-watt compact fluorescent lamp based on \$0.11 per kWh
- One lamp can replace many, greatly reducing inventory
- Use one lamp for applications requiring different CCTs, simplifying project management by streamlining BOMs
- Match color temperature across space with flip of a switch

### LIMITED WARRANTY

5 years



Select color temperature using built-in switch.

### LEARN MORE:

To learn more about saving money and energy, go to [www.LED.com](http://www.LED.com).

## Do MORE with less.

- *Reduce Inventory*
- *Simplify Projects*
- *Optimize Solutions*



Selectable **LED Lamps**



## SpectrChoice™ Type A Plug-in

CUSTOMER NAME \_\_\_\_\_  
 PROJECT NAME \_\_\_\_\_  
 DATE \_\_\_\_\_ NOTES \_\_\_\_\_

### SpectraChoice™ Type A 4-pin Plug-in Lamp

Base Type	Watts	Order Code	Description	Volts	Carton Qty <sup>2</sup>	MOL (in)	MOD (in)	Lumens (Initial) <sup>5</sup>	Selectable Color Temp.*	CRI	Wattage Replacement	Rated Life L70 (Hrs) <sup>1</sup>	Dimmable	DLC <sup>4</sup>	Location Rating <sup>3</sup>	Additional Information
<b>Vertical 4-pin Type A</b>																
G24q	9	93300089	LED9G24q-V/8SC-4PK	#	24	5.9	3.1	1000	2700	80	13/18/26	50,000	-	-	Damp, Enclosed	Electronic Ballast, 4-pack
								1100	3000							
								1100	3500							
								1100	4000							



Information provided is subject to change without notice. Please verify all details with Current. All values are design or typical values when measured under laboratory conditions, and Current makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

# - Lamp operates from ballast. Check ballast compatibility at [LED.com/LED4pin-compatibility](http://LED.com/LED4pin-compatibility)

<sup>1</sup> The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

<sup>2</sup> Minimum order quantity from Current = Carton Qty; Smaller unit of sale pack inside carton

<sup>3</sup> UL 1993 Environmental Requirements for LED LAMPS


Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

<sup>4</sup> Visit [qpl.designlights.org/solid-state-lighting](http://qpl.designlights.org/solid-state-lighting) to confirm qualification.

<sup>5</sup> Lumen levels correspond with color temperature.


\* Default color temperature setting is 4000K.

#### LED G24q 4-pin Base

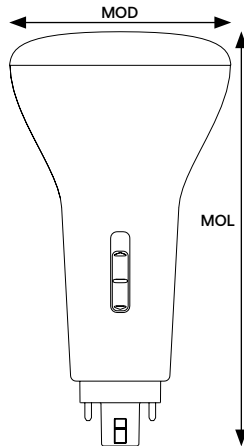


**Works in 4-pin  
G24q/GX24q  
Sockets**

#### Compact Fluorescent G24q 4-pin Bases

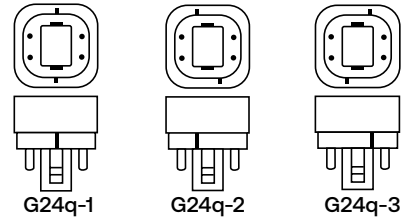

#### Compact Fluorescent GX24q 4-pin Bases

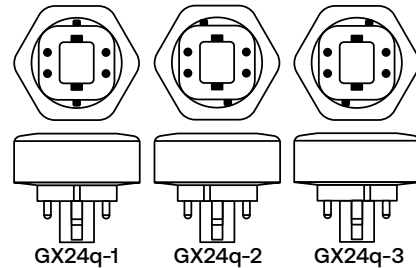

#### Vertical Configuration

