

LTR-6RW-RFH Open

LITEISTRY 6" ROUND RETROFIT OPEN WALL WASH (WW/DWW)

FEATURES


- 6" architectural LED retrofit wall wash delivering 600-3000 lm
- Single and double wall wash solutions
- Provides uniform vertical illumination as well as room side light
- Quiet reflector appearance with 50° optical cutoff
- 2700K–5000K, 80+ and 90+ CRI options
- For use in retrofit (non-IC) applications
- Variety of dimming protocol options including 0-10V, DALI, DMX, and Lutron EcoSystem

LITEISTRY™



SERVICE PROGRAMS

STOCK



Typical Dimensions and Weights				
Lumen Package	"A" Length Inches (mm)	"B" Width Inches (mm)	"C" Height Inches (mm)	Weight lbs (kg)
06L - 15L	13.2 (335)	5.1 (130)	5.9 (150)	4.9 (2.2)
20L - 30L	13.2 (335)	5.1 (130)	6.68 (170)	5.2 (2.4)

See DIMENSIONS section for complete details

SPECIFICATIONS

CONSTRUCTION

- Die cast aluminum mounting ring with 5-axis adjustable junction box
- Retrofit housing allows below ceiling installation without removing existing fixture
- Pre-wired junction box with snap-on covers for easy access
- Snap-in connection from driver compartment allows easy installation
- Light Engine connections use plenum rated (CMP) cable

OPTICS

- Visually pleasing 50° cutoff to source and source image
- Open cone and kicker reflector assembly with an optical grade silicone lens integral to light engine
- Available in Single and Double wall wash distributions
- Provides excellent uniformity down the wall while also contributing to room side lighting
- The light distribution is free of distracting bright spots or pixelation and the perimeter has a smooth transition

OPTICS (CONTINUED)

- High purity spun aluminum reflector, self-flanged
- Large selection of anodized finishes and colors
- Painted cones and flange options available

ELECTRICAL

- Chip-on-board (COB) LED with 2 SDCM
- Multiple CCTs, 80+ or 90+ CRI
- Long LED life: L90 at >55,000 hours (TM-21)
- Universal voltage 120V–277V driver, 347V optional
- UL Class 2, inherent short circuit and overload protection
- Flicker free 0–10V dimming with 1% or <1% performance
- DALI, DMX, and Lutron EcoSystem options
- Refer to additional spec sheets for information on SpectraSync™ Tunable White or Dim-to-Warm solutions

INSTALLATION

- Accommodates ceiling thickness up to 2"
- Light engine/driver fully serviceable from above or below the ceiling

CERTIFICATIONS

- cCSAus certified to UL 1598
- Suitable for damp locations
- Approved for 8 (4 in/4 out) No. 12 AWG conductors rated for 90°C through wiring
- For -BAA Option: This product meets federal procurement law requirements under the Buy American Act (FAR 52.225-9) [See Buy America\(n\) Solutions](#)
- For -TAA Option: Product configurations meet federal procurement law requirements under the Trade Agreements Act (FAR 52.225-11) [See Buy America\(n\) Solutions](#)

WARRANTY

- 5 year warranty

KEY DATA	
Lumen Range	600-3000
Wattage Range	8-35
Efficacy Range (LPW)	97*
Reported Life (Hours)	L90 / >55,000
Input Current (mA)	67-292 (120V)

*Based on Specular, 35K, 80 CRI

LTR-6RW-RFH Open

LITEISTRY 6" ROUND RETROFIT OPEN WALL WASH (WW/DWW)

Gray Shading = Service Program **STOCK**

ORDERING GUIDE

Example: LTR-6RD-RFH-SL10L-DM1-LTR-6RW-T-SL35K8WW-S

CATALOG #

HOUSING

LTR-6RD-RFH		Lumen Package		Lumen Output		Driver Options		Voltage		Housing Options	
Aperture/Shape/Function											
LTR-6RD-RFH	6" Round Downlight / Wall Wash / DWW Retrofit Housing ⁵	SL	Standard Lumen	06L	600	DM1	0-10V Dimming to 1%	Standard	120-277V	F	Fuse
				10L	1000						
				15L	1500						
LTR-6RD-RFH	6" Round Downlight / Wall Wash / DWW Retrofit Housing (for wide diameter) ⁵	ML	Medium Lumen	20L	2000	DMX	DMX with RDM dimming to < 0.1%	34	347V ⁶	BAA	Buy American Act (FAR 52.225-9) Compliant
				25L	2500						
				30L	3000						
						DALI	DALI Dimming to 1%			TAA	Trade Agreements Act (FAR 52.225-11) Compliant
						EDM	Lutron Hi-Lume EcoSystem Dimming to 1% ²				

TRIM

LTR-6RW-T		Lumen Package		CCT		CRI		Distribution	
Aperture/Shape/Function									
LTR-6RW-T	6" Round Wall Wash Light Engine/Trim Assembly	SL	Standard Lumen	27K	2700K	8	80+CRI	WW	Single Wall Wash
				30K	3000K				
				35K	3500K				
				40K	4000K				
				50K	5000K ¹				
						9	90+CRI	DWW	Double Wall Wash

TRIM CONTINUED

Reflector Finish	Reflector Color	Flange Color Options	Lower Trim Options	Reflector Options
<i>Finish not applicable with painted reflectors (WC or BC)</i>	Standard Clear	Standard matches reflector color	WF Wide Flange	AM Antimicrobial Coating ⁴
S Specular	CG Champagne Gold	WT White Flange ³		BAA Buy American Act (FAR 52.225-9) Compliant
SS Semi-Specular	BL Black	BT Black Flange ³		TAA Trade Agreements Act (FAR 52.225-11) Compliant
MFC American Matte™	LW Light Wheat			
VS Softglow®	PW Pewter			
VSS SoftSheen™	WC Painted White Cone and Flange			
	BC Painted Black Cone and Flange			

Accessories

- LiteGear LiteGear® Inverter, 125VA-250VA
- LPS Series LightPower Micro-Inverter, 20VA-55VA
- MOR6-R-WH Metal Oversized Ring, 6" Round, White (10" outside diameter)
- MOR6-R-BL Metal Oversized Ring, 6" Round, Black (10" outside diameter)

Notes:

- 1 5000K available in 80+ CRI only.
- 2 EDM available in 10L-30L.
- 3 WT not needed for WC, BT not needed for BC.
- 4 AM available with WC or Specular Clear (S or SWT). Consult factory for other colors.
- 5 See line art for compatibility with existing aperture diameters.
- 6 347V requires DM1 driver; not available with F.

LTR-6RW-RFH Open



LITEISTRY 6" ROUND RETROFIT OPEN WALL WASH (WW/DWW)

PERFORMANCE DATA TABLE

Performance data provided below is for 3500K, 80 CRI with Specular Clear reflector finish/color

Lumen Package	Nominal Lumens	Distribution	Delivered Lumens	Watts	LPW
06L	600	Open Single Wall Wash	711	7.8	91
10L	1000	Open Single Wall Wash	1136	12.0	95
15L	1500	Open Single Wall Wash	1631	18.7	87
20L	2000	Open Single Wall Wash	2211	22.8	97
25L	2500	Open Single Wall Wash	2726	27.7	98
30L	3000	Open Single Wall Wash	3248	34.3	95

DIMENSIONS

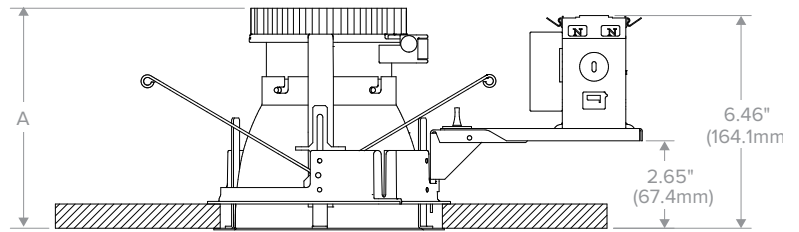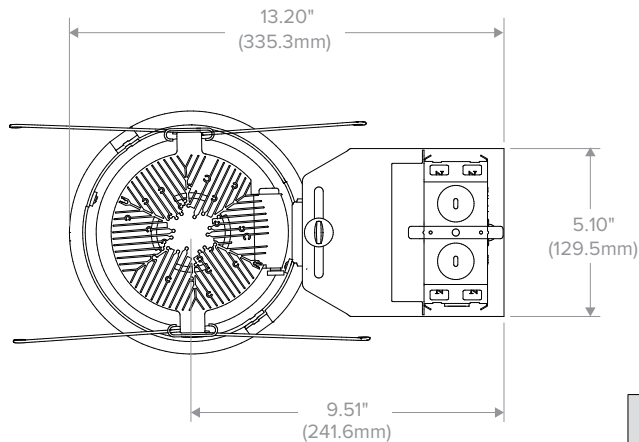

Housing Compatibility Guide			
Existing Frame Opening**		Use Housing	Use Flange Option
MIN	MAX		
6.25" (156.3mm)	6.50" (165.1mm)	-RFH	(Standard)
6.63" (168.4mm)	6.88" (172mm)	-RFHW	WF

Dimensional Data		
Aperture		5.75" (146.1mm)
Flange:	Standard	7.00" (177.8mm)
	Flush Mount	6.54" (166.0mm)
	Wide Flange (WF)	7.75" (196.9mm)
Ceiling Cutout:	Standard	6.50" (165.1mm)
	Flush Mount	6.75" (171.5mm)
Ceiling Thickness:	WW/DWW	0.50" to 2.00" (12.7mm to 50.8mm)

Lumen Package	"A"
06L-15L	5.90" (149.9mm)
20L-30L	6.68" (169.7mm)

**Measure the existing plaster frame opening at its narrowest point

LTR-6RW-RFH/-RFHW

LTR-6RW-RFH Open

LITEISTRY 6" ROUND RETROFIT OPEN WALL WASH (WW/DWW)


PHOTOMETRY

LTR-6RD-RFH-ML20L-DM1 / LTR-6RW-T-ML35K8WW-S

LUMINAIRE DATA

Test No.	R19.00862-C02
Description	Single Wall Wash, 2000 lm, 3500K, 80 CRI
Delivered Lumens	2211
Watts	22.8W
Efficacy	96.9
Mounting	Recessed

POLAR GRAPH

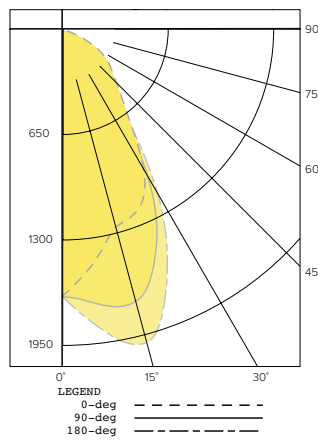

CANDELA DISTRIBUTION

Degree	Candela
0	1776
5	1639
15	1362
25	1260
35	828
45	520
55	374
65	212
75	62
85	7
90	0

LUMINANCE DATA*

Vertical Angle	Average
45°	43896
55°	38921
65°	29943
75°	14299
85°	4794

*Candela/Square Meter

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-40	1842	83.3
0-60	2143	96.9
0-90	2211	100.0
0-180	2211	100.0


LUMEN MULTIPLIER

Option	27K8	30K8	35K8	40K8	50K8	27K9	30K9	35K9	40K9
Multiplier	0.94	0.98	1.00	1.01	1.02	0.81	0.84	0.85	0.85

Photometrics are published below at a nominal 3500 Kelvin, 80+ CRI. This table may be used to approximate the lumen values at different Kelvin temperatures. Power consumption would stay the same.

TM-30 DATA

COLOR VECTOR GRAPHIC 3500K, 90 CRI

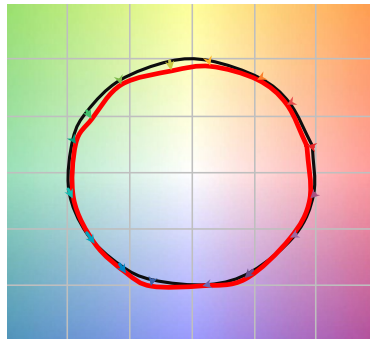


— Reference Illuminant — Test Source

COLOR DISTORTION GRAPHIC 3500K, 90 CRI




TEST RESULTS - 3500K		
Value	80+ CRI	90+ CRI
R _f	84	88
R _g	95	95
CCT (K)	3411	3419
D _{uv}	0.0015	0.0042
x	0.4120	0.4147
y	0.3974	0.4052
CIE R _a	84	93
CIE R _g	11	62

COLOR VECTOR GRAPHIC 3500K, 80 CRI

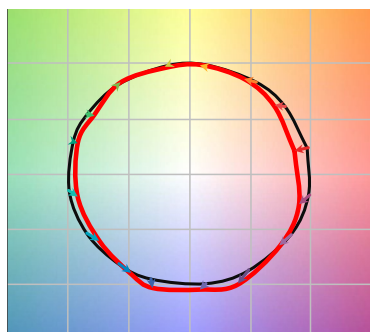

— Reference Illuminant — Test Source

COLOR DISTORTION GRAPHIC 3500K, 80 CRI



LTR-6RW-RFH Open

LITEISTRY 6" ROUND RETROFIT OPEN WALL WASH (WW/DWW)

ELECTRICAL DATA

DRIVER DATA		
Input Voltage	120-277 V	347 V
Input Frequency	50/60 Hz	50/60 Hz
Power Factor	≥0.90	≥0.90
THD	<20%	<20%
EMI Filtering (FCC 47 CFR Part 15)	Class A	Class A

* Values for DM1 option shown, values for other dimming options may vary.

ADDITIONAL INFORMATION

Dimming Compatibility

For more details and recommended dimmer list, see Dimming Compatibility Information on currentlighting.com/prescolite.

DMX

See instruction sheet on currentlighting.com/prescolite for connection & installation information.

Central Inverters

For full fixture output in back-up mode, we recommend you visit currentlighting.com/dual-lite for your Central Lighting Inverter options. Please contact your local Current representative for any assistance with proper sizing and loading of your inverter selection. Central lighting inverters must be ordered separately.