


Suggested Luminaire Applications



EPTT

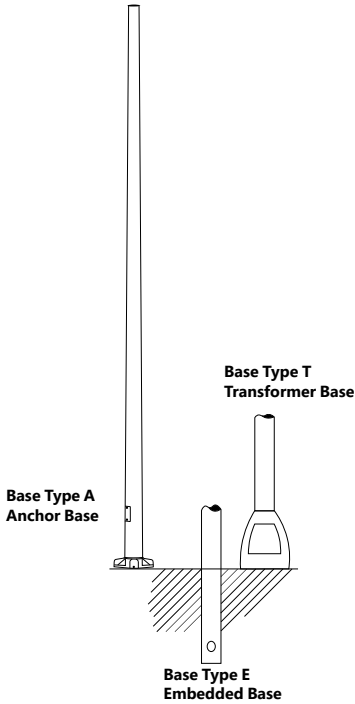

EPTC

SPECIFICATION FEATURES	
•	Round Tapered Aluminum Shaft
•	Satin Ground Finish
•	Shaft Lengths from 10 to 20 feet
•	Three inch top OD for mounting single Post Top luminaire
•	Black and Dark Bronze Powdercoat finishes available
•	Choice of Anchor, Transformer or Embedded Base
•	Anchor bolts can be shipped either with pole or separately (if separate, please make the request at time of order)

Ordering Number Logic (See Pole Selection Table for actual Ordering Numbers)

A R T A

Product Type	Pole Cross Section	Shaft Shape	Pole Material	Nominal Mounting Height (ft)	Mounting	Bottom Shaft OD (in)	Wall Thickness (in)	Finish	Options
A = Area	R = Round	T = Tapered	A = Aluminum	10 = 10	3S = 3-in. OD top for single luminaire	4.0 = 4.0	A = 0.125	BL = Black	A = Anchor
				12 = 12		5.0 = 5.0	B = 0.188	DB = Dark Bronze	E = Embedded
				14 = 14				SN = Satin Ground (Standard)	T = Transformer
				16 = 16					
				18 = 18					
				20 = 20					
								NOTE: if black or dark bronze finish is required, substitute BL or DB for SN in ordering number listed in Selection Table	NOTE: Substitute A, E, or T for x in ordering number listed in Pole Selection Table

NOTE: All poles with anchor bolts need to be entered as 2 line items:

- The line item for the Pole ONLY, will be the corresponding pole SKU + "-LAB" (Less Anchor Bolts). Example: ASSA10XX4ADB-LAB
- The line item for the Anchor Bolts and Anchor Bolt Template ONLY, will be the corresponding pole SKU + "-BOLT." Example: ASSA10XX4ADB-BOLT

Pole Selection Table

Ordering Number	Nominal Mounting Height (ft)	Max Recommended Total Load				Shaft Dimensions Bottom OD X Top OD X Length X Thickness (in X in X ft X in)	Approximate Weight (lbs)
		Weight (lbs)	Effective Projected Area (sq ft)				
			80 MPH	90 MPH	100 MPH		
ARTA103S4.0ASN*	10	50	4.1	3.2	2.4	4.0 X 3.0 X 10 X 0.125	20
ARTA123S4.0ASN*	12	50	3.0	2.2	1.6	4.0 X 3.0 X 12 X 0.125	23
ARTA123S5.0ASN*	12	95	6.4	5.0	4.0	5.0 X 3.0 X 12 X 0.125	25
ARTA143S4.0ASN*	14	50	2.0	1.4	0.9	4.0 X 3.0 X 14 X 0.125	25
ARTA143S5.0ASN*	14	95	5.2	3.9	3.2	5.0 X 3.0 X 14 X 0.125	29
ARTA143S5.0BSN*	14	110	7.9	6.2	4.9	5.0 X 3.0 X 14 X 0.188	41
ARTA163S4.0ASN*	16	50	1.1	0.8	0.5	4.0 X 3.0 X 16 X 0.125	29
ARTA163S5.0ASN*	16	95	4.1	3.2	2.5	5.0 X 3.0 X 16 X 0.125	33
ARTA163S5.0BSN*	16	110	6.5	5.1	4.0	5.0 X 3.0 X 16 X 0.188	46
ARTA183S5.0ASN*	18	60	3.4	2.6	2.0	5.0 X 3.0 X 18 X 0.125	36
ARTA183S5.0BSN*	18	116	5.5	4.2	3.3	5.0 X 3.0 X 18 X 0.188	52
ARTA203S5.0ASN*	20	50	2.5	1.9	1.5	5.0 X 3.0 X 20 X 0.125	40
ARTA203S5.0BSN*	20	95	4.5	3.4	2.7	5.0 X 3.0 X 20 X 0.188	57
						* NOTE: With embedded base, shaft length is 2 ft greater	