

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	·

FEATURES

- Remodel Housing for LiteBox A-Series Trim
- Dedicated LED Quick Link connection
- Pre-installed spring clips
- Maximum ceiling thickness: 1.5"
- Leaf Spring Junction Box cover for tool-less servicing





SERVICE PROGRAMS



SPECIFICATIONS

CONSTRUCTION

- For use in Remodel applications
- Quick Link LED Housing easily connects to mating Quick Link connector on LiteBox A-Series Trims
- Galvanized 22ga pan and housing
- Junction box with leaf spring for ease of access

ELECTRICAL

- For use only with LiteBox A-Series Trims
- See LBRA-RD specifications

INSTALLATION

- Only use with LiteBox A-Series Trims
- Pre-installed spring clips securely mount housing against ceiling
- Ceiling thickness check
- Can accommodate up to 6.5" cutout (6" configuration) or 4.25" cutout (4" configuration)
- Pre-installed neoprene gasket for optimum seal between housing and ceiling
- Maximum ceiling thickness: 1.5"

CERTIFICATIONS

- cCSAus listed to UL1598
- Can be used in direct contact with insulation (IC Rated)
- Air tight certified per ASTM E283
- Meets CA Title 24 High Efficacy (JA8-2019) requirements

WARRANTY

• 5 year warranty

currentlighting.com/prescolite

© 2022 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.



DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

ORDERING GUIDE

CATALOG #						
HOUSING						
LBRA	_]_	RH	
Family		Aperture/Shape/Function			Housing	
LBRA LiteBox A-Series		4RD	4" Round Downlight		RH	Quick Link LED
		6RD	6" Round Downlight			Housing, Remodel

Accessories					
For use with LBRA-4RD-RH					
LBRA-4RD-T-07LCS9-WH	Retrofit Trim Module, 4" Downlight, 700lm, Switchable CCT, 90 CRI, White				
LBRA-4RD-T-07LCS9-BL	Retrofit Trim Module, 4" Downlight, 700lm, Switchable CCT, 90 CRI, Black				
For use with LBRA-6RD-RH					
LBRA-6RD-T-10LCS9-WH	Retrofit Trim Module, 6" Downlight, 1000lm, Switchable CCT, 90 CRI, White				
LBRA-6RD-T-10LCS9-BL	Retrofit Trim Module, 6" Downlight, 1000lm, Switchable CCT, 90 CRI, Black				
LBRA-6RW-T-10LCS9-WH	Retrofit Trim Module, 6" Wall Wash, 1000lm, Switchable CCT, 90 CRI, White				
LBRA-6RW-T-10LCS9-BL	Retrofit Trim Module, 6" Wall Wash, 1000lm, Switchable CCT, 90 CRI, Black				

PERFORMANCE SUMMARY OF TRIMS

Nominal Aperture	Nominal Lumens	Trim Cat #	ССТ	CRI	Delivered Lumens	Watts	LPW
		LBRA-4RD-T-07LCS9-WH	27K		752	9.4	80
	700	LBRA-4RD-T-07LCS9-WH	30K	90	770	9.4	82
4"		LBRA-4RD-T-07LCS9-WH	35K		792	9.4	84
		LBRA-4RD-T-07LCS9-WH	40K		808	9.4	86
		LBRA-4RD-T-07LCS9-WH	50K		818	9.4	87
		LBRA-6RD-T-10LCS9-WH	27K		1039	13.3	78
		LBRA-6RD-T-10LCS9-WH	30K		1067	13.3	80
		LBRA-6RD-T-10LCS9-WH	35K		1096	13.3	82
		LBRA-6RD-T-10LCS9-WH	40K		1120	13.3	84
C.	1000	LBRA-6RD-T-10LCS9-WH	50K		1134	13.3	85
6"		LBRA-6RW-T-10LCS9-WH	27K		980	13.4	73
		LBRA-6RW-T-10LCS9-WH	30K		1006	13.4	75
		LBRA-6RW-T-10LCS9-WH	35K		1033	13.4	77
		LBRA-6RW-T-10LCS9-WH	40K		1056	13.4	79
		LBRA-6RW-T-10LCS9-WH	50K		1069	13.4	80

Current 🗐

currentlighting.com/prescolite

© 2022 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.




Example: LBRA-6RD-RH / LBRA-6RD-10LCS9-WH





LITEBOX A-SERIES REMODEL HOUSING


DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

DIMENSIONS



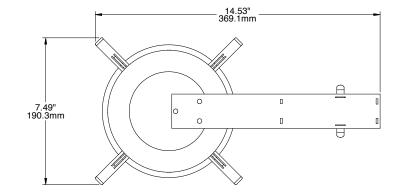





4" Remodel Housing

6" Remodel Housing

ADDITIONAL INFORMATION

Dimming Compatibility

For more details and recommended dimmer list, see Dimming Compatibility Information on currentlighting.com/prescolite.



currentlighting.com/prescolite

© 2022 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.