

# GTX<sup>®</sup>

## TR3 LED Transit Colorlight Signal Modules

5.5 inch (140mm) - 10V AC/DC



Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Notes \_\_\_\_\_



**Current's 14th generation of LED signal, leveraging 15 years of experience & over 6,000,000 units sold worldwide**

### OUTSTANDING RELIABILITY

- Self-contained design provides protection against moisture and dust
- Backed by a 48 month limited warranty

### EXCELLENT APPEARANCE & VISIBILITY

- Robust LED system design enables high luminous intensity over long product life
- Efficient optical system delivers uniform color
- Sloped front shell reduces reflections
- Optional frosted shell available for tunnel applications

### MEETS RIGOROUS CERTIFICATION & TESTING STANDARDS

- Meets key AREMA standards
- All lamps undergo comprehensive testing in the manufacturing plant



The Greatest Signals Stand the Test of Time.™

Current

LED.com

© 2023 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

Page 1 of 2  
(Rev 06/22/23)

RAIL294-TR3-Transit-Signal-10V-DC-Spec-Sheet

# TR3 LED Transit Colorlight Signal Modules



5.5 inch (140mm) - 10V AC/DC

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Notes \_\_\_\_\_

## Mechanical Outline Dimensions in inches (mm)

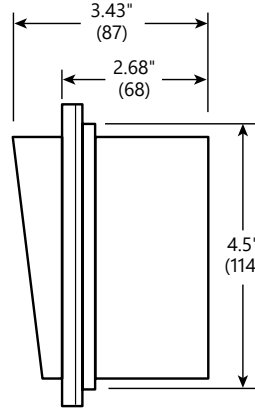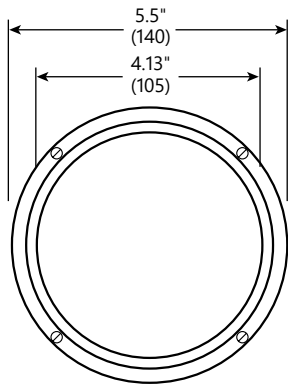

## Design Compliance

Characteristic	Compliance
Mechanical Vibration & Shock	AREMA 11.5.1.D.4/D.5. Class B
Water/Dust Ingress Protection (in typical Rail Housing)	(EN 60529 IP65)
Electrical Surge Protection	EN61000-4-5, Class 3, AREMA 11.3.3
Electromagnetic Compatibility (EMC)	EN55011 FCC Part 15, Subpart B

## Operating Specifications

Parameter	Rating
Operating Temperature	-40 to +70°C (-40 to +158°F)
Operating Voltage	8 to 16 V AC / 8.2 to 20 V DC
Voltage Turn-Off (VTO)	5.3 V AC / 7.3 V DC
Power Surge	45 Vrms for 80 ms

## Product Information

Model Number*	Dominant Wavelength <sup>1</sup> (nm)	Nominal Power (W)	Peak Intensity <sup>1</sup> (cd)	Field Angles (10% of peak Intensity)
<b>Short Range and Tunnel Applications</b>				
● TR3-RSFB301B	627	4	65	43°
● TR3-YCFB301B	592	4	45	43°
● TR3-GCFB301B	500	4	65	47°
○ TR3-WCFB301B	-	4	200	48°
<b>Mid-Range and Outdoor Applications</b>				
● TR3-RCFB501B	625	7	240	47°
● TR3-YCFB501B	594	5	320	30°
● TR3-GCFB501B	500	7	400	50°
○ TR3-WCFB501B	-	8	600	48°

\*Must indicate voltage using suffix: A (120) or B (10V).

### Options:

-96: Light-out detection device for 10 V DC microprocessor-based control systems. Available on 501B models only.

Information provided is subject to change without notice. All value are design or typical values when measured under laboratory conditions.

<sup>1</sup> This is a minimum initial value at T = 25°C.

Distributed by: