

## TR3 LED Transit Colorlight Signal Modules

5.5 inch (140mm) - 10V AC/DC



Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Notes \_\_\_\_\_



**Current's 14th generation of LED signal, leveraging 15 years of experience & over 6,000,000 units sold worldwide**

### OUTSTANDING RELIABILITY

- Self-contained design provides protection against moisture and dust
- Backed by a 48 month limited warranty

### EXCELLENT APPEARANCE & VISIBILITY

- Robust LED system design enables high luminous intensity over long product life
- Efficient optical system delivers uniform color
- Sloped front shell reduces reflections
- Optional frosted shell available for tunnel applications

### MEETS RIGOROUS CERTIFICATION & TESTING STANDARDS

- Meets key AREMA standards
- All lamps undergo comprehensive testing in the manufacturing plant



The Greatest Signals Stand the Test of Time.™

# TR3 LED Transit Colorlight Signal Modules

5.5 inch (140mm) - 10V AC/DC



Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Notes \_\_\_\_\_

## Mechanical Outline

Dimensions in inches (mm)

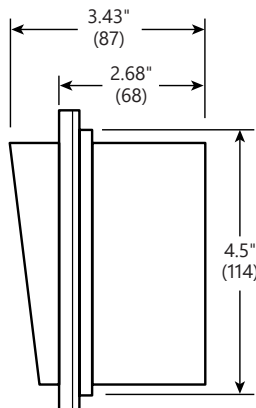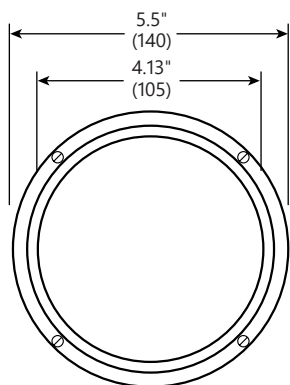

## Design Compliance

Characteristic	Compliance
Mechanical Vibration & Shock	AREMA 11.5.1.D.4/D.5. Class B
Water/Dust Ingress Protection (in typical Rail Housing)	(EN 60529 IP65)
Electrical Surge Protection	EN61000-4-5, Class 3, AREMA 11.3.3
Electromagnetic Compatibility (EMC)	EN55011 FCC Part 15, Subpart B

## Operating Specifications

Parameter	Rating
Operating Temperature	-40 to +70°C (-40 to +158°F)
Operating Voltage	8 to 16 V AC / 8.2 to 20 V DC
Voltage Turn-Off (VTO)	5.3 V AC / 7.3 V DC
Power Surge	45 Vrms for 80 ms

## Product Information

Model Number*	Dominant Wavelength <sup>1</sup> (nm)	Nominal Power (W)	Peak Intensity <sup>1</sup> (cd)	Field Angles (10% of peak Intensity)
<b>Short Range and Tunnel Applications</b>				
● TR3-RSFB301B	627	4	65	43°
● TR3-YCFB301B	592	4	45	43°
● TR3-GSFB301B	505	4	65	47°
○ TR3-WCFB301B	-	4	200	48°
<b>Mid-Range and Outdoor Applications</b>				
● TR3-RCFB501B	625	7	240	47°
● TR3-YCFB501B	594	5	320	30°
● TR3-GCFB501B	505	7	400	50°
○ TR3-WCFB501B	-	8	600	48°

\*Must indicate voltage using suffix: A (120) or B (10V).

### Options:

-96: Light-out detection device for 10 V DC microprocessor-based control systems.

Available on 501B models only.

Information provided is subject to change without notice. All value are design or typical values when measured under laboratory conditions.

<sup>1</sup> This is a minimum initial value at T = 25°C.

Distributed by: