

RG6 LED Level Crossing Signal Modules

12 inch (300 mm)



Project Name _____

Date _____ Type _____

Notes _____



OUTSTANDING RELIABILITY

- Self-contained design provides protection against moisture and dust
- Designed for retrofit into existing housings

EXCELLENT APPEARANCE & VISIBILITY

- Robust LED system design enables high luminous intensity over long product life
- Efficient optical system delivers uniform color

MEETS RIGOROUS CERTIFICATION & TESTING STANDARDS

- Meets AREMA standards*
- Transport Canada Compliant*
- All lamps undergo comprehensive testing in the manufacturing plant Lens
- Withstands 100 mph baseball impact as per NOCSAE Impact Test¹

AVAILABLE IN THREE CONFIGURATIONS



Uniform Look Type A



Uniform Look Type B



Pixelated Look



* See Design Compliance tables on product spec pages.

¹ -H7 SKUs resist concentric impact from a baseball (NOCSAE DOC 072) projected per NOCSAE DOC 021 Section 5.2 & 12.

RG6 LED Level Crossing Signal Modules

Uniform Look Type A -
for Solid State Controllers

Project Name _____

Date _____ Type _____

Notes _____

Design Compliance


| Parameter | Compliance |
|--------------------------|---|
| Environmental Limits | AREMA Part 11.5.1 – Class B |
| Electronic Noise | AREMA Part 11.5.1 – Class B |
| Transient Immunity | AREMA Part 11.3.3 |
| Photometric Requirements | Transport Canada ¹ AREMA Part 3.2.35, Type 30-15 and 20-32 |
| Impact Resistance | 100 mph baseball ² |

Operating Specifications

| Parameter | Type A |
|-----------------------------------|---------------------------------------|
| Operating Temperature Range | -40 to +70 °C (-40 to +158 °F) |
| Nominal Operating Voltage | 12V AC/DC |
| Operating Voltage Range | 8 to 20V DC 8 to 16V AC (50-60 Hz) |
| Voltage Turn-Off (VTO) | 4V |
| Power Surge | 45 Vrms for 80ms |
| Nominal Current Draw ³ | 1.2A |
| Inrush Current Nominal | 0.0128 A ² s |


Mechanical Outline

Dimensions in inches (mm)

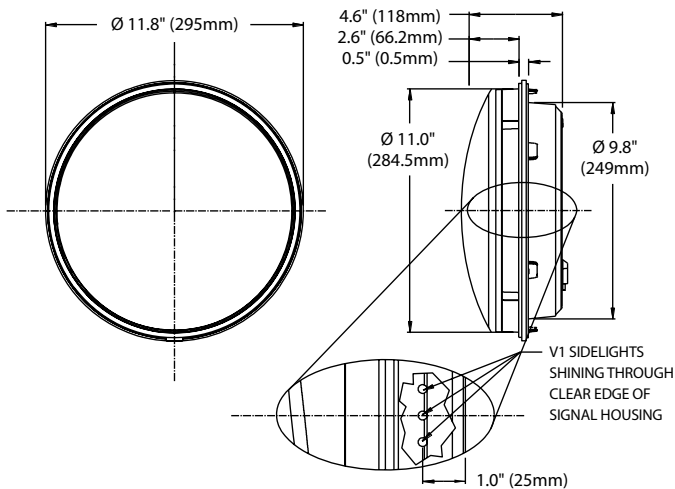

I-V Curve

Type A

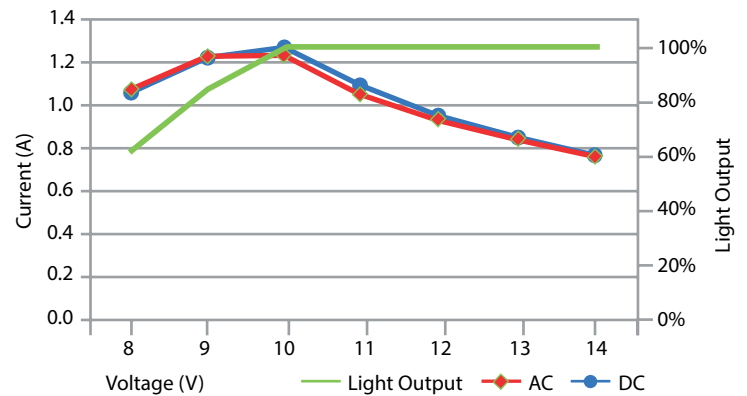

| Model Number | Sidelight Color | Type | Dominant Wavelength | Nominal Power | Typical Beam Angles (intensity) | Typical Field Angles |
|----------------------------------|-----------------|------|---------------------|---------------|---------------------------------|----------------------|
| ● RG6-RTFB-48BV3-H7 ² | White | A | 630 | 12W AC/12W DC | 20°H x -7.5°V | 45°H x -17.5°V |
| ● RG6-RTFB-48BV1-H7 ² | Red | A | 630 | 12W AC/12W DC | 20°H x -7.5°V | 45°H x -17.5°V |
| ● RG6-RTFB-48BV1 | Red | A | 630 | 12W AC/12W DC | 20°H x -7.5°V | 45°H x -17.5°V |

All values are design or typical values when measured under laboratory conditions at T=25°C, with a nominal 50% duty cycle rate @ 1 Hz.

¹ Compliant at voltages greater than or equal to 10V AC/DC.

² -H7 SKUs resist concentric impact from a baseball (NOCSAE DOC 072) projected per NOCSAE DOC 021 Section 5.2 & 12.

³ Based on nominal voltage.

RG6 LED Level Crossing Signal Modules

Uniform Look Type B - for Relay-based and Solid State Controllers

Project Name _____

Date _____ Type _____

Notes _____

Design Compliance


| Parameter | Compliance |
|--------------------------|---|
| Environmental Limits | AREMA Part 11.5.1 – Class B |
| Electronic Noise | AREMA Part 11.5.1 – Class B |
| Transient Immunity | AREMA Part 11.3.3 |
| Photometric Requirements | Transport Canada ¹ AREMA Part 3.2.35, Type 30-15 and 20-32 |
| Impact Resistance | 100 mph baseball ² |

Operating Specifications

| Parameter | Type B |
|-------------------------------------|--|
| Operating Temperature Range | -40 to +70 °C (-40 to +158 °F) |
| Nominal Operating Voltage | 12V AC/DC |
| Operating Voltage Range | 8 to 14V DC 8 to 14V AC |
| Voltage Turn-Off (VTO) | - |
| Power Surge | 42 Vrms for 80ms 1000 Vrms for 1.2/50µs |
| Nominal Current Draw ³ | 1.6A |
| Inrush Current Nominal ⁴ | 0.00005 A ² s |


Mechanical Outline

Dimensions in inches (mm)

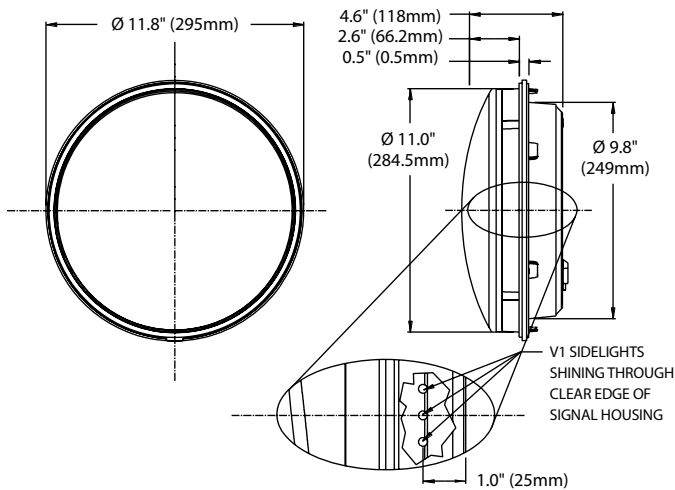

I-V Curve

Type B

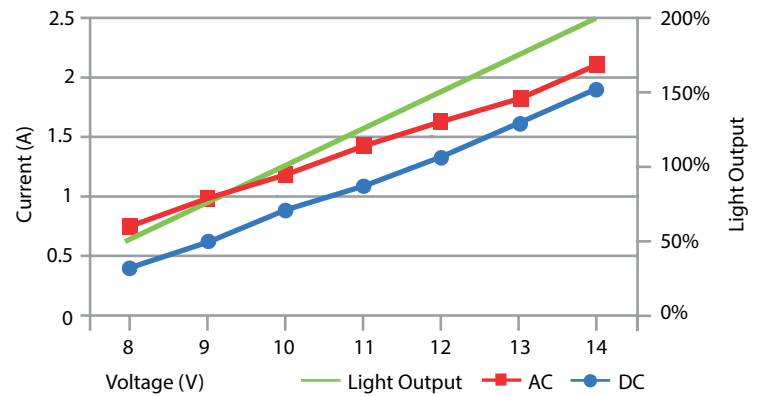

Product Information

| Model Number | Sidelight Color | Type | Dominant Wavelength | Nominal Power | Typical Beam Angles (intensity) | Typical Field Angles |
|-----------------------------------|-----------------|------|---------------------|---------------|---------------------------------|----------------------|
| ● RG6-RTFB-48BV1-H7U ¹ | Red | B | 630 | 18W AC/18W DC | 20°H x -7.5°V | 45°H x -17.5°V |
| ● RG6-RTFB-48BV3-H7U ¹ | White | B | 630 | 18W AC/18W DC | 20°H x -7.5°V | 45°H x -17.5°V |

All values are design or typical values when measured under laboratory conditions at T=25°C, with a nominal 50% duty cycle rate @ 1 Hz.

¹ Compliant at voltages greater than or equal to 10V AC/DC.

² -H7 SKUs resist concentric impact from a baseball (NOCSAE DOC 072) projected per NOCSAE DOC 021 Section 5.2 & 12.

³ Based on nominal voltage.

⁴ Above nominal current.

RG6 LED Level Crossing Signal Modules

Pixelated Look - for Relay-based and Solid State Controllers

Project Name _____

Date _____ Type _____

Notes _____

Design Compliance


| Parameter | Compliance |
|--------------------------|---|
| Environmental Limits | AREMA Part 11.5.1 – Class B |
| Electronic Noise | AREMA Part 11.5.1 – Class B |
| Transient Immunity | AREMA Part 11.3.3 |
| Photometric Requirements | Transport Canada ¹ AREMA Part 3.2.35, Type 30-15 and 20-32 |
| Impact Resistance | 100 mph baseball ² |

Operating Specifications

| Parameter | Pixelated |
|-----------------------------------|---|
| Operating Temperature Range | -40 to +70 °C (-40 to +158 °F) |
| Nominal Operating Voltage | 10V AC/DC |
| Operating Voltage Range | 8 to 14V DC 8 to 14V AC |
| Voltage Turn-Off (VTO) | - |
| Power Surge | 42 Vrms for 80ms 1000 Vrms for 1.8µs |
| Nominal Current Draw ³ | 0.85A (DC) 1.05A (AC) |
| Inrush Current Nominal | 0.00005 A ² s |


Mechanical Outline

Dimensions in inches (mm)

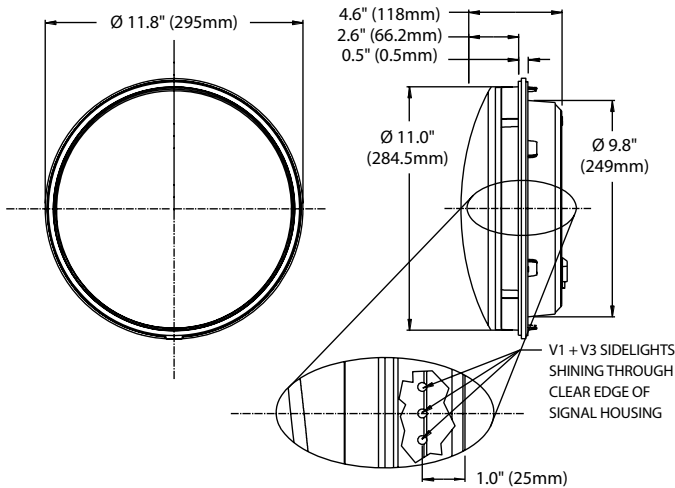

I-V Curve

Pixelated

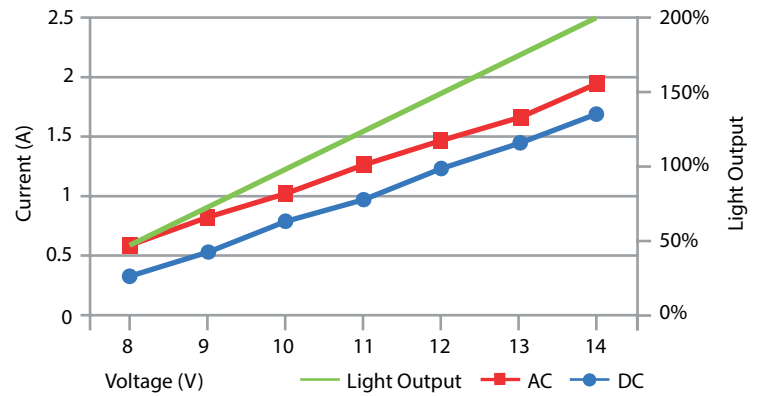

| Model Number | Sidelight Color | Type | Dominant Wavelength | Nominal Power | Typical Beam Angles (intensity) | Typical Field Angles |
|---------------------------------|-----------------|------|---------------------|----------------|---------------------------------|----------------------|
| RG6-RTFB-01BV1-H7 | Red | - | 623 | 10.5W AC/8W DC | 30°H x 30°V | 46°H x 46°V |
| RG6-RTFB-01BV1-GH7 ⁴ | Red | - | 623 | 10.5W AC/8W DC | 30°H x 30°V | 46°H x 46°V |
| RG6-RTFB-01BV3-H7 | White | - | 623 | 10.5W AC/8W DC | 30°H x 30°V | 46°H x 46°V |
| RG6-RTFB-01BV3-GH7 ⁴ | White | - | 623 | 10.5W AC/8W DC | 30°H x 30°V | 46°H x 46°V |

All values are design or typical values when measured under laboratory conditions at T=25°C, with a nominal 50% duty cycle rate @ 1 Hz.

¹ Compliant at voltages greater than or equal to 10V AC/DC.

² -H7 SKUs resist concentric impact from a baseball (NOCSAE DOC 072) projected per NOCSAE DOC 021 Section 5.2 & 12.

³ Based on nominal voltage.

⁴ With gasket option.