

RATIO Wall

RWL1/RWL2 LED WALLPACK

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

MICROSTRIKE | **STRIKE** OPTICS

FEATURES

- Low profile LED wall luminaire with a variety of IES distributions for lighting applications such as retail, commercial and industrial building mount
- Featuring Strike and Micro Strike Optics which maximizes target zone illumination with minimal losses at the house-side, reducing light trespass issues
- Visual comfort standard
- Control options including photo control, occupancy sensing, NX Distributed Intelligence™, LightGRID+ and 7-Pin with networked controls
- Battery Backup options available for emergency code compliance
- Quick-mount adapter allows easy installation/maintenance
- 347V and 480V versions for industrial applications and Canada



CONTROL TECHNOLOGY



SPECIFICATIONS

CONSTRUCTION

- Die-cast housing with hidden vertical heat fins that are optimal for heat dissipation while keeping a clean smooth outer surface
- Corrosion resistant, die-cast aluminum housing with powder coat paint finish
- Powder paint finish provides durability in outdoor environments. Tested to meet 1000 hour salt spray rating

OPTICS

- Entire optical aperture illuminates to create a larger luminous surface area resulting in a low glare appearance without sacrificing optical performance
- 48 or 160 midpower LEDs
- 3000K, 4000K or 5000K (70 CRI/80 CRI) CCT
- Zero uplight distributions
- LED optics provide IES type II, III and IV distributions. Type II only available in RWL2 configurations

INSTALLATION

- Quick-mount adapter provides easy installation to wall or to recessed junction boxes (4" square junction box)
- Designed for direct j-box mount.
- Integral back box contains 1/2" conduit hubs
- Integral backbox provided as standard with selection of some options

ELECTRICAL

- 120V-277V universal voltage 50/60Hz 0-10V dimming drivers
- 347V and 480V dimmable driver option for all wattages above 35W
- Ambient operating temperature -40°C to 40°C
- Driver RoHS and IP66

SERVICE PROGRAM


QS10

ELECTRICAL (CONTINUED)

- 10kV Surge Protector optional
- Drivers have greater than .90 power factor and less than 20% Total Harmonic Distortion
- Dual Driver option provides 2 drivers within luminaire but only one set of leads exiting the luminaire, where Dual Power Feed provides two drivers which can be wired independently as two sets of leads are extended from the luminaire. Both options can not be included in one same fixture.
- Dimming drivers are standard and dimming leads are extended out of the luminaire unless control options require connection to the dimming leads. Must specify if wiring leads are to be greater than 6" standard.

CONTROLS

- Photo control, occupancy sensor and wireless available for complete on/off and dimming control
- Button photocontrol is suitable for 120-277V operation
- 7-pin ANSI C136.41-2013 photocontrol receptacle option available for twist lock photocontrols or wireless control modules (control accessories sold separately)
- NX Distributed Intelligence™ available with in fixture wireless control module, features dimming and occupancy sensor
- LightGRID+ available with in fixture wireless control module, features dimming and occupancy sensor
- Integral Battery Backup provides emergency lighting for the required 90 minute path of egress
- Battery Backup suitable for operating temperatures -25°C to 40°C. RWL1 battery is 12.5W RWL2 battery is 18W

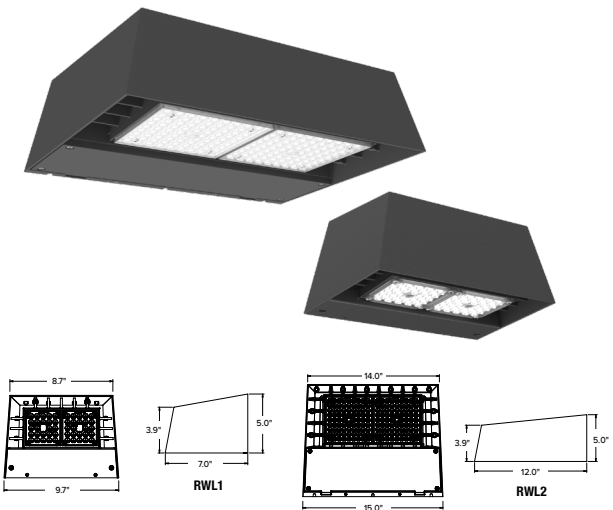

	Weight
RWL1	6.5 lbs / 2.95 kg
RWL2	16.5 lbs / 7.48 kg

CONTROLS (CONTINUED)

- Dual Driver and Dual Power Feed options creates product configuration with 2 internal drivers for code compliance
- Please consult brand or sales representative when combining control and electrical options as some combinations may not operate as anticipated depending on your application.
- LightGRID+ available with in fixture wireless control module, features dimming and occupancy sensor. Also available in 7-pin configuration

CERTIFICATIONS

- Certified to UL 1598 and CSA 22.2#250.0-24 for wet locations
- IP65 rated housing
- DLC® (DesignLights Consortium Qualified), with some Premium Qualified configurations. Not all product variations listed in this document are DLC® qualified. Refer to <http://www.designlights.org> for the most up-to-date list.
- Emergency battery backup options are California Energy Commission (CEC) Title 20 Compliant
- Meets IDA requirements using 3K CCT configuration at 0 degrees or tilt

WARRANTY

- 5 year limited warranty



RATIO Wall

RWL1/RWL2 LED WALLPACK

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

Gray Shading = Service Program Limit of 15 luminaires **QS10**

ORDERING GUIDE

Example: RWL1-48L-10-3K7-2-UNV-BLS-E

CATALOG #

Series		# LEDs - Wattage		CCT/CRI		Distribution		Voltage		Color	
RWL1	Micro Strike Optics	48L-10	1,000 Lumens	3K7	3000K, 70 CRI	2	IES TYPE II	UNV	120-277V	BLT	Black Matte Textured
		48L-15	2,000 Lumens	4K7	4000K, 70 CRI	3	IES TYPE III	120	120V	BLS	Black Gloss Smooth
		48L-20	2,500 Lumens ^{5, 6}	5K7	5000K, 70 CRI	4F	IES TYPE IV Forward	208	208V	DBT	Dark Bronze Matte Textured
		48L-25	3,500 Lumens	3K8	3000K, 80 CRI	4W	IES TYPE IV Wide	240	240V	DBS	Dark Bronze Gloss Smooth
		48L-35	4,500 Lumens	4K8	4000K, 80 CRI			277	277V	GTT	Graphite Matte Textured
		48L-45	5,500 Lumens ^{5, 6}	5K8	5000K, 80 CRI			347	347V	LGS	Light Grey Gloss Smooth
RWL2	Micro Strike Optics	160L-45	6,500 Lumens					480	480V	LGT	Light Grey Matte Textured
		160L-50	7,500 Lumens							PSS	Platinum Silver Smooth
		160L-65	9,500 Lumens							WHT	White Matte Textured
		160L-80	11,000 Lumens							WHS	White Gloss Smooth
		160L-95	13,000 Lumens							VGTT	Verde Green Textured
		160L-115	15,000 Lumens							Color Option	
		160L-135	17,500 Lumens						CC	Custom Color	
		160L-155	19,500 Lumens								
RWL2	Strike Optics	36L-39	5,500 Lumens, Strike								
		36L-55	7,500 Lumens, Strike								
		36L-85	10,000 Lumens, Strike								
		36L-105	12,500 Lumens, Strike								
		36L-120	14,000 Lumens, Strike								

Control Options Network	Distribution
NXW NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor ^{2,7,12}	F Fusing ⁴
NXWS16F NX Networked Wireless Enabled Integral NXSMP2-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming ^{2,7,12}	E Emergency Battery Backup ^{3,8,9}
NXWS40F NX Networked Wireless Enabled Integral NXSMP2-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming ^{2,7,12}	EH Emergency Battery w/ Heater Option ^{3,8,9}
WIR LightGRID+ In-Fixture Module ^{2,9}	2DR Dual Driver ^{3,9,10}
Stand Alone Sensors	2PF Dual Power Feed ^{3,9,10}
SCP-8F Remote control programmable line voltage sensor ^{1,2,4,5,6,8}	PC Button Photocontrol ^{5,6,11}
SCP-20F Remote control programmable line voltage sensor ^{1,2,4,5,6,8}	SP 10kA Surge Protector ¹¹
BTS-14F Bluetooth® Programmable, PIR Occupancy/Daylight Sensor ^{1,2,5,7,8}	
BTS-40F Bluetooth® Programmable, PIR Occupancy/Daylight Sensor ^{1,2,5,7,8}	
BTSO-12F Bluetooth® Programmable, PIR Occupancy/Daylight Sensor, up to 12' mounting height ^{1,2,5,7,8}	
Control Options	
7PR_ 7-Pin Receptacle ^{8,9}	

Notes:
1 Not available in RWL1
2 Cannot be combined with E, EH, 2DR, 2PF due to space constraints
3 Cannot be combined with Controls due to space constraints
4 Must specify voltage
5 Not available in 347V
6 Not available in 480V
7 Available in 480V in 95W, 115W, 155W only
8 Cannot be combined with 2DR or 2PF
9 Located in integral backbox which will be automatically added to the fixture if selected
10 Not available in RWL1-48L in 10W, 15W, or 20W
11 SP and PC cannot be combined due to space constraints
12 SP and PC cannot be combined due to space constraints
* Based on space limitations, some options may not be combined. Consult Factory.

CONTROLS

Control Options

Standalone

SCPREMOTE Order at least one per project location to program and control

ACCESSORIES AND REPLACEMENT PARTS - MADE TO ORDER

Catalog Number	Description
☐ WP-BB-XXX	Accessory for conduit entry ¹

Notes:
1 replace "xxx" with color option

RATIO Wall

RWL1/RWL2 LED WALLPACK

CONTROLS FUNCTIONALITY

OUTDOOR LIGHTING CONTROLS OPTIONS

LIGHTGRID⁺




Control Option Ordering Logic & Description			Control Option Functionality									Control Option Components	
			Networkable	Grouping	Scheduling	Occupancy/ Motion	Daylight Harvesting	0-10V Dimming	On/Off Control	Bluetooth App Programming	Sensor Height		
NX Wireless	NXW	NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor	✓	✓	✓	-	-	✓	✓	✓	-		NXRM2-H
	NXWS16F	NX Networked Wireless Enabled Integral NXSMP2-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming	✓	✓	✓	✓	✓	✓	✓	✓	16ft		NXSMP2-LMO
	NXWS40F	NX Networked Wireless Enabled Integral NXSMP2-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming	✓	✓	✓	✓	✓	✓	✓	✓	40ft		NXSMP2-HMO
LightGRID+	WIR	LightGRID+ In-Fixture Module	✓	-	✓	-	-	✓	✓	Gateway	-		WIR
Independent	BTSO-12F	Bluetooth® Programmable, BTSMP-OMNI-O PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens	-	-	-	✓	✓	✓	✓	✓	12ft		BTSMP-OMNI-O
	BTS-14F	Bluetooth® Programmable, BTSMP-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens	-	-	-	✓	✓	✓	✓	✓	14ft		BTSMP-LMO
	BTS-40F	Bluetooth® Programmable, BTSMP-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens	-	-	-	✓	✓	✓	✓	✓	40ft		BTSMP-HMO

DEFAULT SETTINGS

NX Wireless	Occupancy Sensor	Enabled
	Occupancy Sensor Sensitivity	7
	Occupancy Sensor Timeout	15 Minutes
	Occupied Dim Level	100%
	Unoccupied Dim Level	0%
	Daylight Sensor	Disabled
	Bluetooth	Enabled
	2.4GHz Wireless Mesh	On
	"Passcode Factory Passcode: HubbN3T!"	Enabled

Stand Alone	Occupancy Sensor	Enabled
	Occupancy Sensor Sensitivity	7
	Occupancy Sensor Timeout	8 Minutes
	Occupied Dim Level	100%
	Unoccupied Dim Level	50%
	Daylight Sensor	Disabled

NX WIRELESS COVERAGE PATTERNS

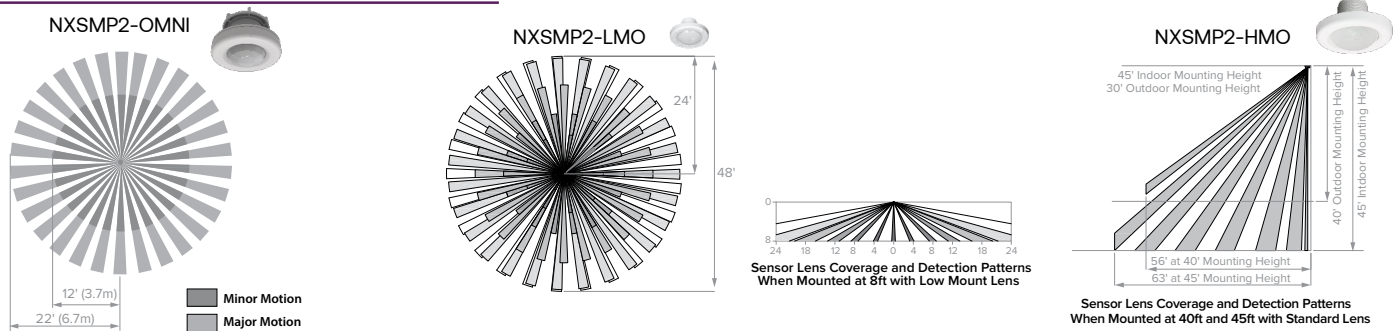

NX LIGHTING CONTROLS FREE APP

CONTROLS TECH SUPPORT 800-888-8006 (7:00 AM - 7:00 PM)



The NX Lighting Controls App is free to use mobile application for programming both NX Lighting Controls System or Standalone Bluetooth Sensors. The mobile app allows you to configure devices, discover and setup wireless enable luminaires and program NX system settings.

Apple App: <https://apps.apple.com/us/app/nx-lighting-controls/id962112904>

Google Play: https://play.google.com/store/apps/details?id=io.cordova.NXBTR&hl=en_US&gl=US



Apple App



Google Play

RATIO Wall

RWL1/RWL2 LED WALLPACK

DATE: _____ LOCATION: _____

TYPE: _____ PROJECT: _____


CATALOG #: _____

OUTDOOR LIGHTING CONTROLS OPTIONS

CONTROLS FUNCTIONALITY

	Control Option Ordering Logic & Description	Control Option Functionality									Control Option Components
		Networkable	Grouping	Scheduling	Occupancy/ Motion	Daylight Harvesting	0-10V Dimming	On/Off Control	Bluetooth App Programming	Sensor Height	
Independent	SCP_F Sensor Control Programmable, sensor range, reference product specification for height selections	-	-	-	✓	✓	✓	✓	-	8ft or 40ft	SCP_F
	7PR 7-Pin Receptacle	-	-	Paired with external control	-	Paired with external control	-	Paired with external control	-	-	7PR

COVERAGE PATTERNS FOR SCP_F

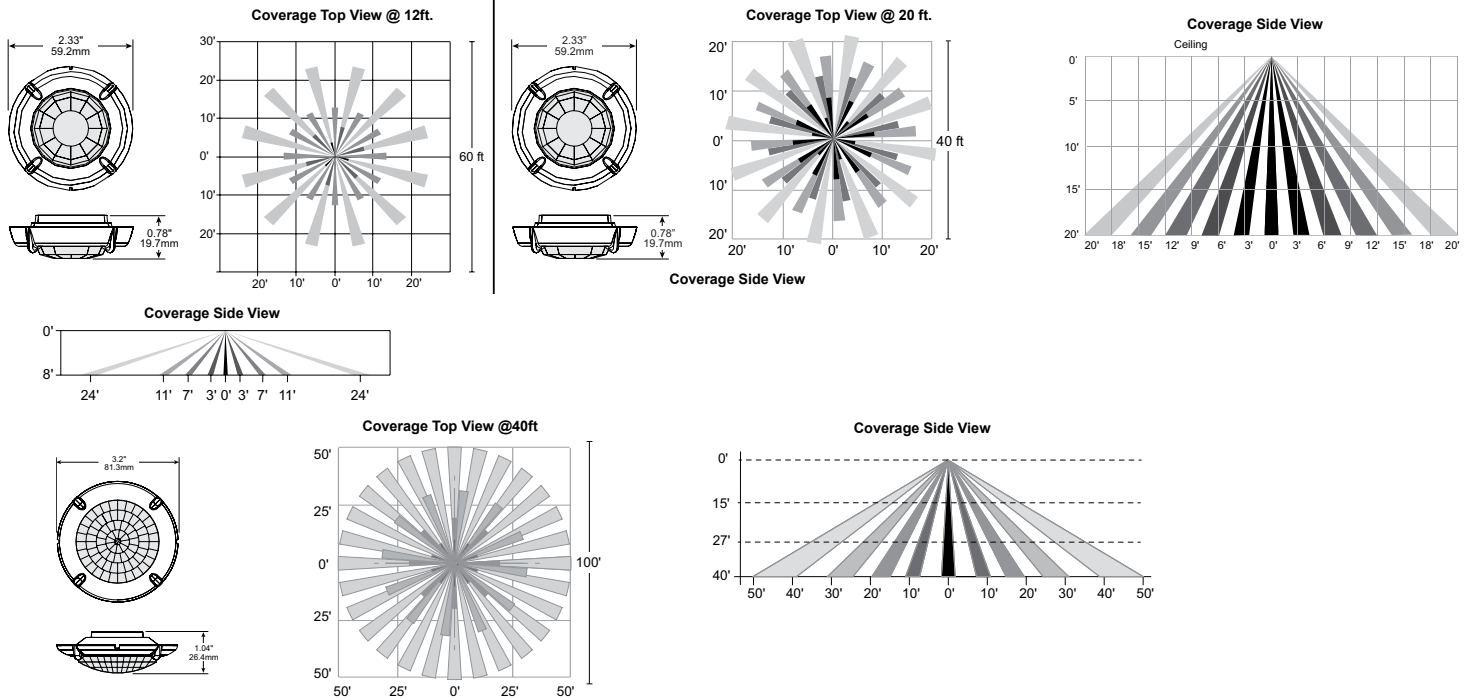

PERFORMANCE DATA: MICROSTRIKE

Description	Nominal Wattage	System Watts	Dist. Type	5K (5000K NOMINAL 70 CRI)					4K (4000K NOMINAL 70 CRI)					3K (3000K NOMINAL 70 CRI)				
				Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
RWL1	10	10.1	3	1362	135	0	0	1	1355	134	0	0	1	1303	129	0	0	1
			4W	1343	133	0	0	1	1336	132	0	0	1	1285	127	0	0	1
	15	14.5	3	1972	136	1	0	1	1962	135	1	0	1	1887	130	1	0	1
			4W	1945	134	0	0	1	1935	133	0	0	1	1861	128	0	0	1
	20	19.9	3	2722	137	1	0	1	2709	136	1	0	1	2605	131	1	0	1
			4W	2685	135	1	0	1	2672	134	1	0	1	2569	129	1	0	1
	25	28.0	3	3749	134	1	0	1	3732	133	1	0	1	3588	128	1	0	1
			4W	3698	132	1	0	1	3680	131	1	0	1	3538	126	1	0	1
	35	36.9	3	4751	129	1	0	2	4728	128	1	0	2	4546	123	1	0	1
			4W	4685	127	1	0	2	4663	126	1	0	2	4483	121	1	0	2
	45	46.5	3	5812	125	1	0	2	5784	124	1	0	2	5562	120	1	0	2
			4W	5731	123	1	0	2	5704	123	1	0	2	5485	118	1	0	2
RWL2	45	46.1	2	6701	145	1	0	2	6668	145	1	0	2	6412	139	1	0	2
			3	6812	148	1	0	2	6780	147	1	0	2	6519	141	1	0	2
			4W	6678	145	1	0	2	6646	144	1	0	2	6390	139	1	0	2
	50	54.0	2	7747	143	1	0	2	7710	143	1	0	2	7413	137	1	0	2
			3	7876	146	1	0	2	7838	145	1	0	2	7537	140	1	0	2
			4W	7720	143	1	0	2	7683	142	1	0	2	7388	137	1	0	2
	65	67.2	2	9539	142	1	0	2	9494	141	1	0	2	9129	136	1	0	2
			3	9699	144	2	0	2	9652	144	2	0	2	9281	138	2	0	2
			4W	9507	141	2	0	2	9461	141	2	0	2	9097	135	2	0	2
	80	80.8	2	11228	139	2	0	2	11174	138	2	0	2	10745	133	2	0	2
			3	11416	141	2	0	2	11361	141	2	0	2	10924	135	2	0	2
			4W	11190	138	2	0	2	11136	138	2	0	2	10708	133	2	0	2
	95	93.2	2	13148	141	2	0	2	13085	140	2	0	2	12582	135	2	0	2
			3	13368	143	2	0	2	13304	143	2	0	2	12792	137	2	0	2
			4W	13103	141	2	0	2	13040	140	2	0	2	12539	135	2	0	2
	115	109.8	2	15102	138	2	0	3	15030	137	2	0	3	14452	132	2	0	3
			3	15354	140	2	0	3	15281	139	2	0	3	14693	134	2	0	3
			4W	15050	137	2	0	3	14978	136	2	0	3	14402	131	2	0	3
	135	137.1	2	17533	128	2	0	3	17449	127	2	0	3	16778	122	2	0	3
			3	17826	130	2	0	3	17740	129	2	0	3	17058	124	2	0	3
			4W	17473	127	2	0	3	17389	127	2	0	3	16720	122	2	0	3
	155	156.8	2	19495	124	2	0	3	19402	124	2	0	3	18656	119	2	0	3
			3	19821	126	2	0	3	19726	126	2	0	3	18967	121	2	0	3
			4W	19542	125	2	0	3	19448	124	2	0	3	18700	119	2	0	3

RATIO Wall

RWL1/RWL2 LED WALLPACK

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

PERFORMANCE DATA: STRIKE

Description	Nominal Wattage	System Watts	Dist. Type	5K (5000K NOMINAL 70 CRI)					4K (4000K NOMINAL 70 CRI)					3K (3000K NOMINAL 70 CRI)				
				Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
RWL2	39	45.1	2	5618	125	1	0	1	5723	127	1	0	1	5251	116	1	0	1
			3	5644	125	1	0	2	5749	127	1	0	2	5274	117	1	0	2
			4F	5662	126	1	0	2	5768	128	1	0	2	5291	117	1	0	2
			4W	5652	125	1	0	2	5757	128	1	0	2	5282	117	1	0	2
	55	63.1	2	7458	118	1	0	2	7659	121	1	0	2	6970	110	1	0	2
			3	7552	120	1	0	2	7694	122	1	0	2	7058	112	1	0	2
			4F	7577	120	1	0	2	7718	122	1	0	2	7081	112	1	0	2
			4W	7564	120	1	0	3	7705	122	1	0	3	7069	112	1	0	3
	85	88.0	2	10121	115	2	0	2	10311	117	2	0	2	9459	107	2	0	2
			3	10167	116	1	0	3	10357	118	1	0	3	9502	108	1	0	3
			4F	10200	116	1	0	2	10390	118	1	0	2	9532	108	1	0	2
			4W	10182	116	1	0	3	10372	118	1	0	3	9516	108	1	0	3
	105	111.7	2	12022	108	2	0	2	12247	110	2	0	2	11235	101	2	0	2
			3	12075	108	2	0	3	12301	110	2	0	3	11285	101	2	0	3
			4F	12115	108	1	0	3	12341	110	1	0	3	11322	101	1	0	2
			4W	12093	108	2	0	3	12319	110	2	0	3	11302	101	1	0	3
	120	126.2	2	12889	102	2	0	2	13130	104	2	0	2	12046	95	2	0	2
			3	12947	103	2	0	3	13189	105	2	0	3	12100	96	2	0	3
			4F	12989	103	1	0	3	13232	105	1	0	3	12139	96	1	0	3
			4W	12966	103	2	0	3	13208	105	2	0	3	12118	96	1	0	3

RATIO Wall

RWL1/RWL2 LED WALLPACK

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

LUMINAIRE AMBIENT TEMPERATURE FACTOR (LATF)

Ambient Temperature		Lumen Multiplier
0°C	32°F	1.03
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.98
50°C	122°F	0.97

PROJECTED LUMEN MAINTENANCE

Ambient Temp.	OPERATING HOURS		
	0	25,000	TM-21-22 60,000
25°C / 77°F	1.00	0.91	0.83
40°C / 104°F	0.99	0.90	0.82

Lumen maintenance values calculated per TM-21 using six times the LM-80 test time for the LED and in-situ thermal testing of the luminaire.

MULTIPLIER

Micro Strike Lumen Multiplier			
CCT	70 CRI	80 CRI	90 CRI
2700K	–	0.841	–
3000K	0.977	0.861	0.647
3500K	–	0.900	–
4000K	1	0.926	0.699
5000K	1	0.937	0.791

Strike Lumen Multiplier			
CCT	70CRI	80CRI	90CRI
2700K	0.900	0.810	0.62
3000K	0.933	0.853	0.659
3500K	0.959	0.894	0.711
4000K	1.000	0.900	0.732
5000K	1.000	0.900	0.732
Monochromatic Amber Multiplier			
Amber	See Amber Spec Sheet		

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

ELECTRICAL DATA: MICROSTRIKE

# OF LEDS	Nominal Wattage	Input Voltage	Oper. Current (Amps)	System Power (Watts)
RWL1	10	120	0.08	10.1
		208	0.05	
		240	0.04	
		277	0.04	
		347	0.03	
		480	0.02	
	15	120	0.12	14.5
		208	0.07	
		240	0.06	
		277	0.05	
		347	0.04	
		480	0.03	
	20	120	0.17	19.9
		208	0.10	
		240	0.08	
		277	0.07	
		347	0.06	
		480	0.04	
	25	120	0.23	28.0
		208	0.13	
		240	0.12	
		277	0.10	
		347	0.08	
		480	0.06	
	35	120	0.31	36.9
		208	0.18	
		240	0.15	
		277	0.13	
		347	0.11	
		480	0.08	
	45	120	0.39	46.5
		208	0.22	
		240	0.19	
		277	0.17	
		347	0.13	
		480	0.10	

# OF LEDS	Nominal Wattage	Input Voltage	Oper. Current (Amps)	System Power (Watts)
RWL2	45	120	0.38	46.1
		208	0.22	
		240	0.19	
		277	0.17	
		347	0.13	
		480	0.10	
	50	120	0.45	54.0
		208	0.26	
		240	0.23	
		277	0.19	
		347	0.16	
		480	0.11	
	65	120	0.56	67.2
		208	0.32	
		240	0.28	
		277	0.24	
		347	0.19	
		480	0.14	
	80	120	0.67	80.8
		208	0.39	
		240	0.34	
		277	0.29	
		347	0.23	
		480	0.17	
	95	120	0.78	93.2
		208	0.45	
		240	0.39	
		277	0.34	
		347	0.27	
		480	0.19	
	115	120	0.92	109.8
		208	0.53	
		240	0.46	
		277	0.40	
		347	0.32	
		480	0.23	
	135	120	1.14	137.1
		208	0.66	
		240	0.57	
		277	0.49	
		347	0.40	
		480	0.29	
	155	120	1.31	156.8
		208	0.75	
		240	0.65	
		277	0.57	
		347	0.45	
		480	0.33	

RATIO Wall

RWL1/RWL2 LED WALLPACK

DATE: _____ LOCATION: _____

TYPE: _____ PROJECT: _____

CATALOG #: _____


ELECTRICAL DATA: STRIKE

# OF LEDS	Nominal Wattage	Input Voltage	Oper. Current (Amps)	System Power (Watts)
RWL2	39	120	0.38	45.1
		208	0.22	
		240	0.19	
		277	0.16	
		347	0.13	
		480	0.09	
	55	120	0.53	63.1
		208	0.30	
		240	0.26	
		277	0.23	
		347	0.18	
		480	0.13	
	85	120	0.73	88.0
		208	0.42	
		240	0.37	
		277	0.32	
		347	0.25	
		480	0.18	
	105	120	0.93	111.7
		208	0.54	
		240	0.47	
		277	0.40	
		347	0.32	
		480	0.23	
	120	120	1.05	126.2
		208	0.61	
		240	0.53	
		277	0.46	
		347	0.36	
		480	0.26	


PHOTOMETRY

Mounting Height: 30ft


Type 2




Type 3



Type 4F



Type 4W

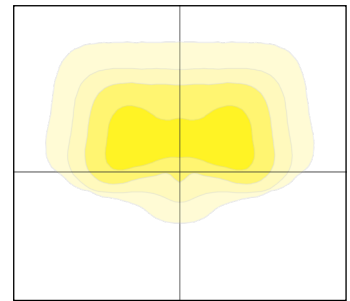


RATIO Wall

RWL1/RWL2 LED WALLPACK


DIMENSIONS

RWL1

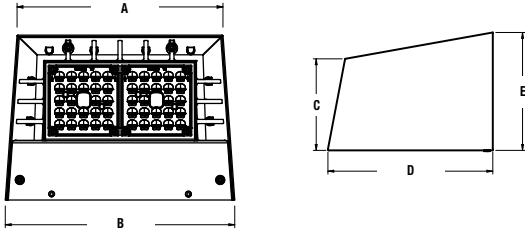


A	B	C	D	E	Weight
8.7"	9.7"	3.9"	7.0"	5.0"	6.5 lbs (2.95 kgs)
221mm	246mm	99mm	178mm	127mm	

RWL2

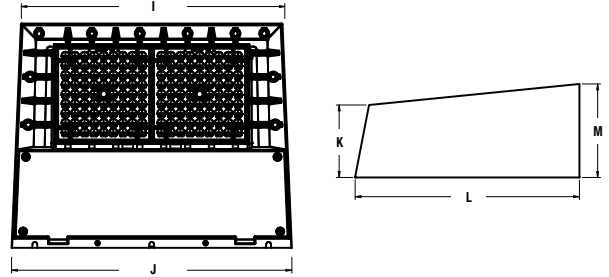


I	J	K	L	M	Weight
14.0"	15.0"	3.9"	12.0"	5.0"	16.5 lbs (7.48 kgs)
356mm	381mm	99mm	305mm	127mm	

**RWL1 with
Integral Back Box**

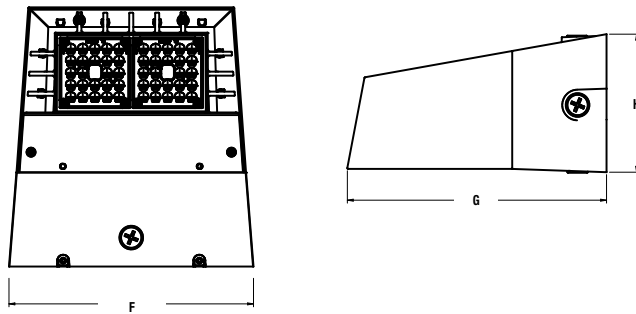


F	G	H
10.4"	11.0"	5.9"
264mm	279mm	150mm

**RWL2 with
Integral Back Box**

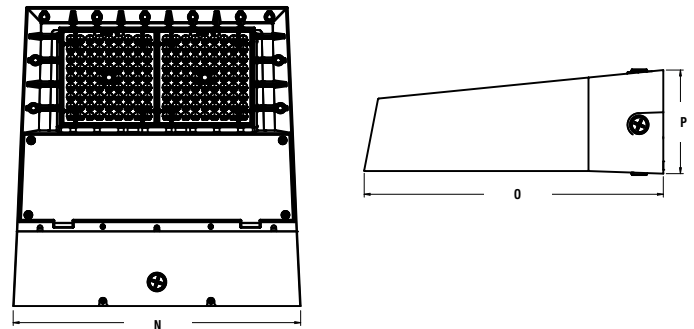

N	O	P
15.4"	16.0"	5.5"
391mm	406mm	140mm

Back Box Accessory

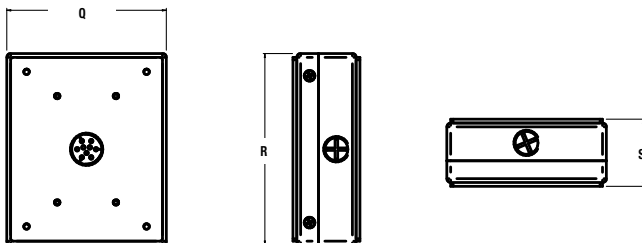



Q	R	S
4.9"	5.9"	2.1"
124mm	150mm	53mm

RATIO Wall



RWL1/RWL2 LED WALLPACK

ADDITIONAL INFORMATION





NXSP-14F

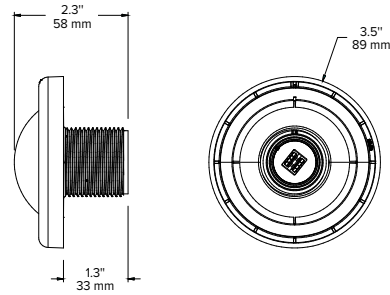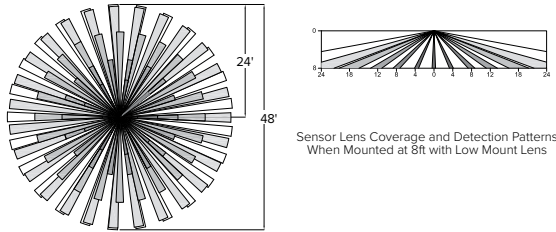

NXSP-40F


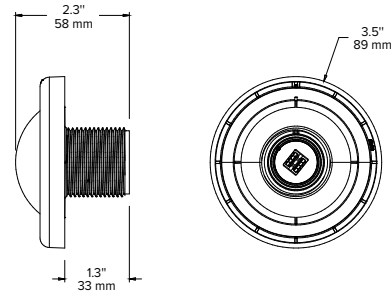
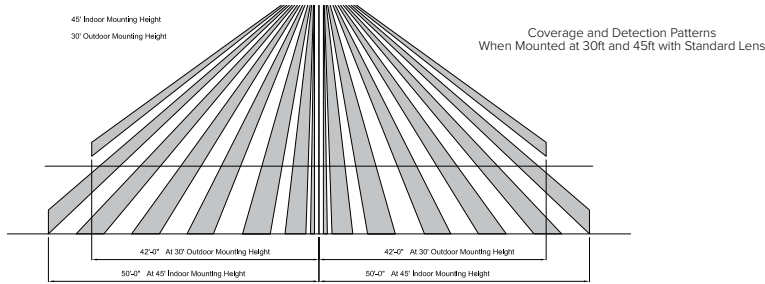


SCP-8F

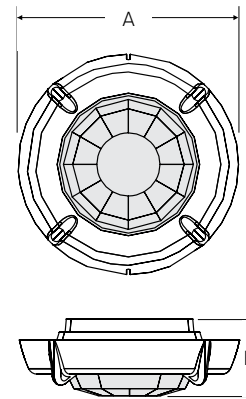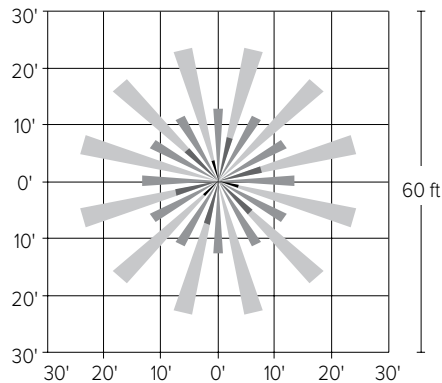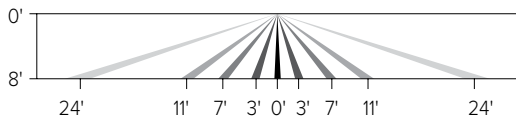

A	B
2.3" (59mm)	.8" (20mm)

SCP-20F

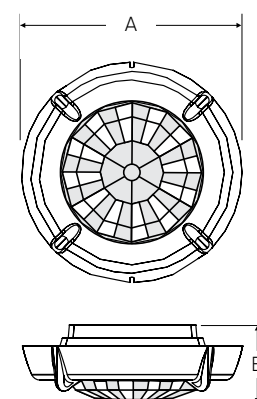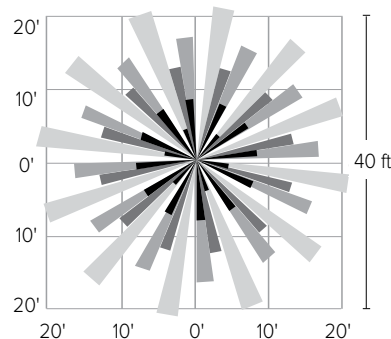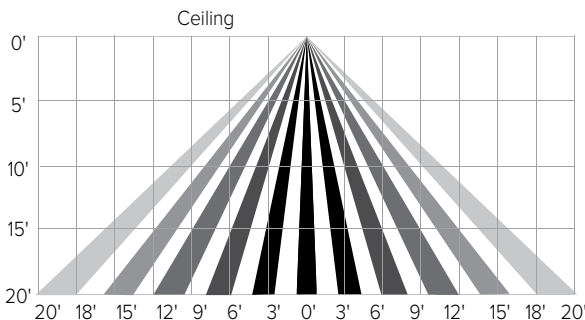

A	B
2.3" (59mm)	.8" (20mm)