


GEPS12-60U-GLX2

12V 60W Power Supply

All Tetra® power supplies are designed specifically for the sign industry by our team of electronics experts. Tetra power supplies are built to stand the test of time, backed by the most extensive reliability testing in the industry and a five-year warranty.

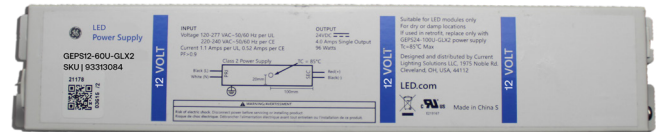

Features:

- Standard 5-year warranty
- Compatible with all 12VDC Current Lighting LED products
- UL: Class 2
- IEC: SELV

Specifications	
Model	GEPS12-60U-GLX2
SKU	93313084
Nominal Voltage	120-277V ± 10%
Line Current	0.6A (max)
Frequency	50/60Hz
Protection Class: (EU Class I/II/III)	Class I
Number of Output Channels	1
Output Voltage	12VDC +0.6/-0.4VDC
Output Power	60W, Iout ≤ 5.0A
Power Factor	>0.95 @ full load across nominal input voltage
THD	< 20% @ full load across nominal input voltage
Efficiency at Full Load	120VAC: 86% 230VAC: 86.5% 277VAC: 90%
Max. no. of PSU per MCB:	Available upon request
Operating Temperature Range, Ta	-40°C to 55°C
Operating Humidity	10% to 90% non-condensing
Storage Temperature Range	-40°C to 85°C
Max. Case Temperature at Tc Point:	85°C
Warranty @ 100% Duty Cycle, Tc=45°C	5 years
Short Circuit Protection	Yes

Specifications	
Overload Protection	Yes
Over Temperature Protection	Yes
Environmental Rating	Dry and Damp Rated, IP54 rated: must be protected from direct exposure to the weather
Geometry (LxWxH)	5.83 in. x 1.80 in. x 1.00 in. (148.2 mm x 45.6 mm x 25.4 mm)
Weight	340 g
Suitable for Fixtures with Protection Class	UL Class 2, SELV
Safety	UL 8750 UL 1310 CAN/CSA-C22.2 No. 207 CAN/CSA-C22.2 No.223 EN 61347-2-13, EN 61347-1
Radio Interference	FCC Part 15 Class A E55015, EN 61547, EN 61000-3-2, EN 61000-3-3
Surge Capability	EN 61000-4-5 (1.2/50µs @ 2.0kV/2Ω L-N, 4.0kV/12Ω L+N-PE)
RoHS	Yes
Approvals (Certificates)	UL, CE, UKCA
Additional Notes	No-Load Power (Pno) ≤ 0.5W



Electrical products must not be thrown out with domestic waste. They must be taken to a communal collecting point for environmentally friendly disposal in accordance with local regulations. Contact your local authorities or stockist for advice on recycling. The packaging material is recyclable. Dispose of the packaging in an environmentally friendly manner and make it available for the recyclable material collection-service