



Select TX[®] Cuttable Light Bar Gen 3

CABINET SIGN LIGHTING SYSTEMS



Flexible and Customizable
LED Solution

Select TX[®] Cuttable Light Bar is a product designed with the ability to be cut every 2 LEDs or 145 mm (5.7 in), allowing signmakers to create indoor illuminated signage and displays that fit their vision.

Components


SKU	SKU Description	Product Description	CCT	LED Color	Voltage	Quantity
93319369	GECLB2465-1120-3	Tetra Select TX Cuttable Light Bar	6500K	White	24VDC	50 pcs/Box

Specifications for 93319369

CRI (Min)	Typical LM *	Rated Power (Watt)	LEDs	Typical LPW *	Rating	25W Controlgear (Driver)	60W Controlgear (Driver)	100W Controlgear (Driver)	200W Controlgear (Driver)	300W Controlgear (Driver)	Maximum light bars in series connection(s)
70	850	5.3	16	160	24VDC, 221mA/Bar 5.30W/Bar	3 Bars/3.36m (11. ft)	8 Bars/8.96m (29.4 ft)	15 Bars/16.8m (55.1 ft)	15 Bars/16.8m (55.1ft) per channel 30 Bars/33.6m (110.2ft) per PS	15 Bars/16.8m (55.1ft) per channel 45 Bars/50.4m (165.4ft) per PS	6 bars / 22 ft (6.72 m)

*Typical performance +/-10%, at 25°C.

Product Dimensions

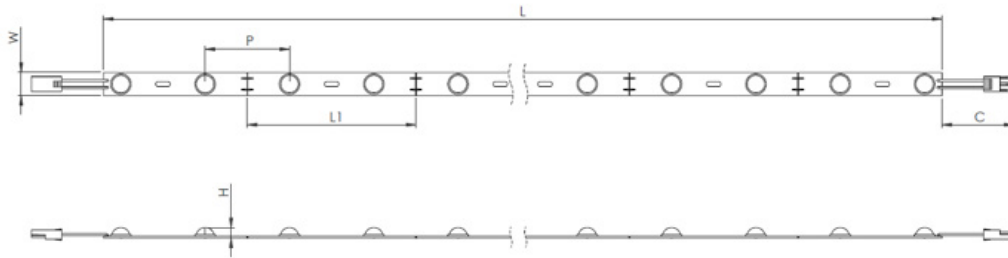

Type	L	W	H	L1	P	C
GECLB2465-1120-3	44" (1120mm)	0.8" (20mm)	0.3" (6.7mm)	5.7" (145.3mm)	2.9" (72.7mm)	3.8" (96mm)

Accessories

SKU	Type	Description
93135342G	GECLB-CTK-0250-2	Connector Lead Kit 250 mm
93135343	GECLB-CTK-1500-2	Connector Lead Kit 1500 mm
93135344G	GECLB-CTK-0100-2	Power Lead Kit 100 mm

Additional Specifications

Power Supply	Tetra 24V Power Supplies
Dimmable	Yes (with dimmable 24V power supply)
Cut Resolution	Cuttable every 2 LEDs or 5.7" (145mm)
Operating Environment	-20 °C to +50 °C (-4 °F to +122 °F)
Warranty	Limited system warranty of up to five (5) years
Sign Dimensions L x W x H	44"x0.8"x0.3" (1120 x 20 x 6.7mm)
System Certifications	UL Recognized (c-us) #E219167, UL Classified (c-us) LED Luminaire Conversion Kit #229508, CE, UKCA, ROHS, UL Dry Rated, IP20