



PLED-75W CV Series

Flicker-Free LED Driver

select **SYNC**[™]
classic

Electrical Specifications

| | |
|----------------------|---|
| Input Voltage Range: | 120-277 Vac Nom. (100-305 V Min/Max) |
| Input Over-Voltage: | Can endure 320Vac for 48 Hrs, 350Vac for 2 Hrs |
| Frequency: | 50/60 Hz Nom. (47-63 Hz Min/Max) |
| Power Factor: | ≥ 0.90 at ≥ 75% Load, 120Vac/230Vac/277Vac 50/60Hz |
| Inrush Current: | <45A at 25C, 277V, cold start, Max. Load |
| Input Current: | 1.0A Maximum |
| Maximum Power: | 75W |
| Line Regulation: | ± 3% |
| Load Regulation: | ± 4% |
| THD: | ≤ 20% at ≥ 60% Load, 120Vac/230Vac/277Vac 50/60Hz |
| Leakage Current: | 700uA typical, 277Vac; Hold up time: half cycle |
| Hold Up Time: | 40mS typical @ Full Load, 277Vac |



Protections

| | |
|----------------|---|
| Over-voltage: | No Damage, Auto Recovery after fault is removed |
| Over-current: | Constant Current Limiting Circuit |
| Short Circuit: | No Damage, Auto Recovery after fault is removed |

Environmental Specifications

| | |
|-------------------------|--|
| Max Case Life Temp: | 66°C (5 year warranty) |
| Maximum Case Temp (UL): | 90°C |
| Minimum Starting Temp: | -40°C |
| Class P: | UL8750, CSA 22.2 listed, UL Type HL |
| Storage Temperature: | -40°C to +85°C |
| Humidity: | 5% to 95% |
| Cooling: | Convection |
| Vibration Frequency: | 5 to 55 Hz/2g, 30 minutes |
| Sound Rating: | Class A |
| MTBF: | 474,000 Hours @ full load & 40°C ambient conditions per MIL-217F Notice 2 |
| EMC: | FCC 47CFR Part 15 Class B @ 120Vac, Class A @ 277Vac |
| Weight: | 19 oz. (538 g) |



- Smallest Footprint Driver for this wattage
- Total Power: 75 Watts
- Constant Voltage
- Input Voltage: 120-277Vac Nom.
- UL Dry & Damp Location Rated
- IP67 & NEMA4
- cULus Listed, Class P
- UL Type HL Rated for Hazardous Locations
- UL Sign Components Manual (S.A.M.)
- Black Magic Thermal Advantage™ Aluminum Housing

Constant Voltage Models

| Model | Output Voltage (Vdc ±5%) | Output Current Range (mA) | Max. Output Power (W) | Max Efficiency |
|-------------|-----------------------------|------------------------------|--------------------------|-------------------|
| PLED75W-012 | 12 | 1563-6250 | 75 | 86% |
| PLED75W-024 | 24 | 783-3130 | 75 | 88% |
| PLED75W-036 | 36 | 525-2100 | 75 | 88% |
| PLED75W-048 | 48 | 390-1560 | 75 | 88% |

Safety Cert. Standard

UL/CUL Listed UL8750 & CAN/CSA-22.2 No. 250.13-12, UL1310/CSA-C22.2 No.223-M91
for Class 2, UL1012/CSA-C22.2 No.107.1 for Non-Class 2


CE EN61347

EMC Standard Notes



| | |
|--------------------|--|
| FCC, 47CFR Part 15 | Class B @ 120Vac, Class A @ 277Vac |
| EN55015 | Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment. |
| EN 61000-3-2 | Part 3-2: Limits for harmonic current emissions Class C, >80% Rated Power |
| EN 61000-3-3 | Part 3-3: Limitation of voltage changes, voltage fluctuations and flicker. |
| EN 61000-4-5 | Part 4-5: Surge Immunity test, 2 kV L-N, 4 kV L-G & N-G |

Note: CV LED drivers are designed and intended to operate CV LED loads only. Non-LED loading may be outside the specified design limits of our LED drivers, and therefore cannot be covered by any warranty. If you desire to use our LED drivers to operate non-LED loads please contact us to discuss compatibility.


Dimensions

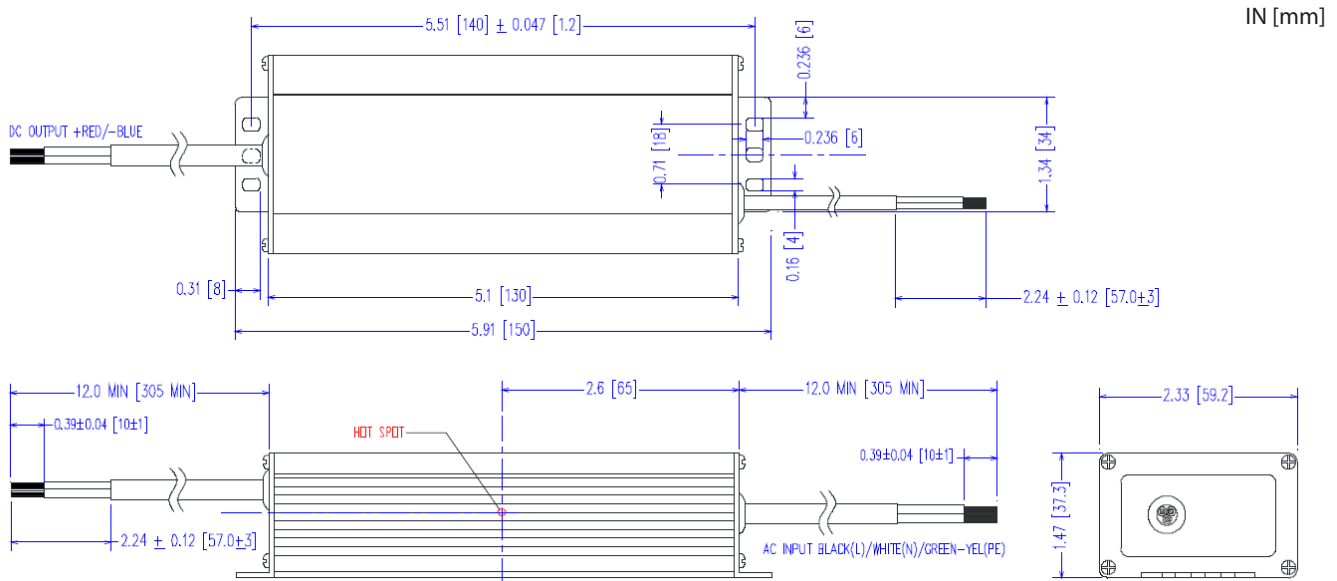


Power Characteristics

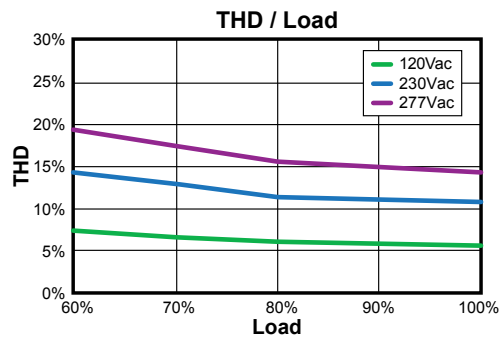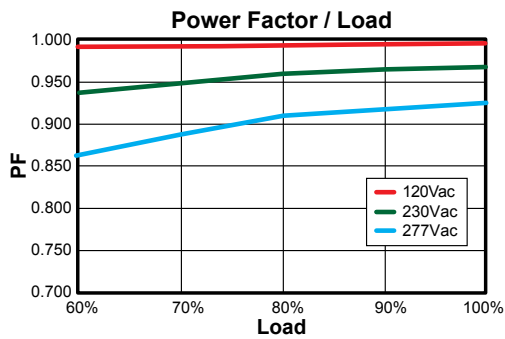

Lifetime / Case Temperature
Full Load @ 120Vac

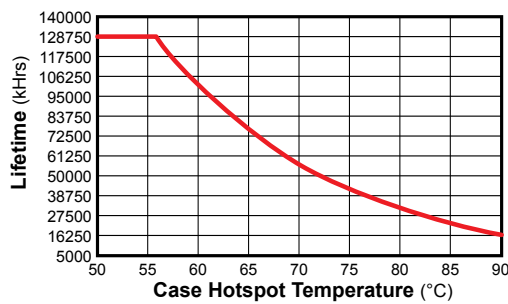

Typical Efficiency / Load

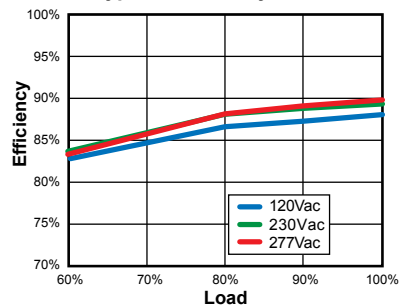

Note: The area under the life-temperature curve represents where the driver has highly reliable operation within specification. Driver performance may drift out of published specifications as the hours of operation exceed the curve at a given temperature. Higher operating temperatures increase the chances of a failure to function. Other electrical, mechanical and environmental factors affect driver lifetime but are not represented in this calculation.

UL Conditions of Acceptability:
See website for additional information