

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

FEATURES

- Reliable, uniform, glare free illumination
- Types II, III, IV, V and custom distributions
- 3000K, 4000K, 5000K CCT
- 0-10V dimming ready
- Integral surge suppression
- Upgrade Kits



3000K and warmer CCTs only

PROVIDENCE®



Providence Medium LED Deck

SPECIFICATIONS

CONSTRUCTION

- All internal and external hardware are stainless steel
- Luminaire finish consists of a five stage pretreatment regimen with a polymer primer sealer, oven dry off, and top coated with a thermoset super TGIC polyester powder coat finish.
- Optical bezel finish matches the luminaire housing

LED/OPTICS

- Molded silicone gasket ensures a weather-proof seal around each individual LED
- Features revolutionary individual LED optical control based on high performance TIR optical designs

LED/OPTICS CONTINUED

- House Side Shield is available on Standard and Clear Lens options except any Type 5 distribution. House Side Shield is not available for any distribution using a Diffused Lens

INSTALLATION

- Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.

ELECTRICAL

- Luminaires have integral surge protection, UL recognized and have a surge current rating of 10,000 Amps using the industry standard 8/20uSec wave and surge rating of 372J

ELECTRICAL CONTINUED

- Drivers are UL recognized with an inrush current maximum of <20.0 Amps maximum at 230VAC
- 100%-1% dimming range. Fixture will be wired for low voltage 0-10V dimming control
- Driver and surge suppressor are mounted to a prewired tray with quick disconnects that may be removed from the gear compartment

CERTIFICATIONS

- ETL listed under UL 1598 and CSA C22.2 No. 250.0-08 for wet locations

WARRANTY

- 5 year warranty

HOUSING

PROV2- LK		LED Quantity		Lumen output		CCT/CRI		Distribution		Finish	
PROV2- LK	Providence Upgrade Kit	36L	36 LED	295	450mA Microcore Crossover	AMB	Amber-595nm Peak ¹	1	Type I	BLS	Black Gloss Smooth
				325	325mA, 4500 Lumens	3K7	3000K, 70 CRI	2	Type II	BLT	Black Matte Textured
				510	510mA, 6500 Lumens	4K7	4000K, 70 CRI	3	Type III	DBS	Dark Bronze Gloss Smooth
				525	700mA Microcore Crossover	5K7	5000K, 70 CRI	4W	Type IV Wide	DBT	Dark Bronze Matte Textured
				615	615mA, 7500 Lumens			5Q	Type V Square	GTT	Graphite Matte Textured
								5W	Type V Wide	LGS	Light Grey Gloss Smooth
										LGT	Light Grey Matte Textured
										PSS	Platinum Silver Gloss Smooth
										VGT	Verde Green Matte Textured
										WHS	White Gloss Smooth
										WHT	White Matte Textured
Color Option											
										CC ⁴	Custom Color

Options	Voltage
SF Single Fuse (120, 277)	UNV 120-277V
DF Double Fuse (208, 240)	

Notes:
1 Turtle friendly
2 Consult factory

DELIVERED LUMENS

The table below shows the delivered lumens for the various lumen outputs and beam distributions. Use this chart in connection with the lumen factor (LF) capability to deliver any output required.

LED #	Drive Current	Lumen Package	Lens	Distribution	3000K 70CRI				4000K 70CRI				5000K 70CRI							
					Lumen	Bug Rating			Efficacy (Lm/W)	Lumen	Bug Rating			Efficacy (Lm/W)	Lumen	Bug Rating			Efficacy (Lm/W)	
36	295	450mA Microcore Crossover	None	1	3807	1	0	1	111.6	3960	1	0	1	116.1	4128	1	0	1	121.0	
				2	3596	1	0	1	105.4	3740	1	0	1	109.7	3899	1	0	1	114.3	
				3	3471	1	0	1	101.8	3611	1	0	1	105.9	3764	1	0	1	110.4	
				4W	3501	1	0	1	102.7	3642	1	0	1	106.8	3796	1	0	1	111.3	
				1-HS	2355	0	0	1	69.1	2450	0	0	1	71.8	2554	0	0	1	74.9	
				2-HS	2049	0	0	1	60.1	2132	0	0	1	62.5	2222	0	0	1	65.2	
				3-HS	1981	0	0	1	58.1	2061	0	0	1	60.4	2148	0	0	1	63.0	
				4W-HS	2044	0	0	1	59.9	2126	0	0	1	62.3	2216	0	0	1	65.0	
				5Q	3818	2	0	1	112.0	3971	2	0	1	116.5	4140	2	0	1	121.4	
			5W	3529	2	0	1	103.5	3670	2	0	1	107.6	3826	2	0	1	112.2		
			Clear	1-CL	3242	1	0	1	95.0	3373	1	0	1	98.8	3516	1	0	1	103.0	
				2-CL	3062	1	0	1	89.7	3186	1	0	1	93.3	3321	1	0	1	97.3	
				3-CL	2957	1	0	1	86.6	3075	1	0	1	90.1	3206	1	0	1	93.9	
				4W-CL	2982	1	0	1	87.4	3102	1	0	1	90.9	3233	1	0	1	94.7	
				1-CL-HS	2006	0	0	1	58.8	2087	0	0	1	61.1	2175	0	0	1	63.7	
				2-CL-HS	1746	0	0	1	51.1	1816	0	0	1	53.2	1893	0	0	1	55.5	
				3-CL-HS	1688	0	0	1	49.4	1755	0	0	1	51.4	1830	0	0	1	53.6	
				4W-CL-HS	1740	0	0	1	51.0	1810	0	0	1	53.0	1887	0	0	1	55.3	
	5Q-CL	3252		2	0	1	95.3	3382	2	0	1	99.1	3526	2	0	1	103.3			
	5W-CL	3005	2	0	1	88.1	3126	2	0	1	91.6	3259	2	0	1	95.5				
	Diffused	3-DL	2243	1	0	1	65.8	2334	1	0	1	68.4	2433	1	0	1	71.3			
		5W-DL	2280	1	0	1	66.9	2372	1	0	1	69.6	2473	1	0	1	72.5			
	325	4500		None	1	4147	1	0	1	110	4313	1	0	1	114	4496	1	0	1	118.9
					2	3917	1	0	1	104	4074	1	0	1	108	4247	1	0	1	112.3
					3	3781	1	0	1	100	3933	1	0	1	104	4100	1	0	1	108.4
					4W	3813	1	0	1	101	3967	1	0	2	105	4135	1	0	2	109.3
					1-HS	2566	0	0	1	68	2669	0	0	1	71	2782	0	0	1	73.6
					2-HS	2232	0	0	1	59	2322	0	0	1	61	2421	0	0	1	64.0
					3-HS	2158	0	0	1	57	2245	0	0	1	59	2340	0	0	1	61.9
					4W-HS	2226	0	0	1	59	2315	0	0	1	61	2414	0	0	1	63.8
					5Q	4158	2	0	1	110	4326	2	0	1	114	4509	2	0	1	119.2
				5W	3844	2	0	1	102	3998	2	0	1	106	4168	3	0	1	110.2	
				Clear	1-CL	3532	1	0	1	93.4	3674	1	0	1	97.1	3829	1	0	1	101.3
					2-CL	3336	1	0	1	88.2	3470	1	0	1	91.7	3617	1	0	1	95.6
					3-CL	3220	1	0	1	85.2	3350	1	0	1	88.6	3492	1	0	1	92.3
					4W-CL	3248	1	0	1	85.9	3379	1	0	1	89.3	3522	1	0	1	93.1
1-CL-HS					2185	0	0	1	57.8	2273	0	0	1	60.1	2369	0	0	1	62.6	
2-CL-HS					1901	0	0	1	50.3	1978	0	0	1	52.3	2062	0	0	1	54.5	
3-CL-HS					1838	0	0	1	48.6	1912	0	0	1	50.6	1993	0	0	1	52.7	
4W-CL-HS					1896	0	0	1	50.1	1972	0	0	1	52.1	2056	0	0	1	54.4	
5Q-CL		3542	2		0	1	93.6	3684	2	0	1	97.4	3840	2	0	1	101.5			
5W-CL		3274	2	0	1	86.6	3405	2	0	1	90.0	3550	2	0	1	93.9				
Diffused		3-DL	2459	1	0	1	65.0	2558	1	0	1	67.7	2666	1	0	1	70.7			
		5W-DL	2469	1	0	1	65.3	2568	1	0	1	67.9	2677	1	0	1	70.9			

DELIVERED LUMENS (CONTINUED)

The table below shows the delivered lumens for the various lumen outputs and beam distributions. Use this chart in connection with the lumen factor (LF) capability to deliver any output required.

LED #	Drive Current	Lumen Package	Lens	Distribution	3000K 70CRI				4000K 70CRI				5000K 70CRI						
					Lumen	Bug Rating			Efficacy (Lm/W)	Lumen	Bug Rating			Efficacy (Lm/W)	Lumen	Bug Rating			Efficacy (Lm/W)
36	510	6500	None	1	6081	1	0	1	104.1	6326	1	0	1	108	6594	1	0	1	113
				2	5744	1	0	1	98.3	5975	1	0	1	102	6228	1	0	1	107
				3	5545	1	0	2	94.9	5768	1	0	2	99	6013	1	0	2	103
				4W	5593	1	0	2	95.7	5818	1	0	2	100	6064	1	0	2	104
				1-HS	3763	0	0	1	64.4	3914	0	0	1	67	4080	0	0	1	70
				2-HS	3274	0	0	1	56.1	3406	0	0	1	58	3550	0	0	1	61
				3-HS	3165	0	0	1	54.2	3292	0	0	1	56	3432	0	0	1	59
				4W-HS	3265	0	0	1	55.9	3396	0	0	1	58	3540	0	0	1	61
				5Q	6099	2	0	1	104.4	6344	2	0	1	109	6613	3	0	1	113
			5W	5637	3	0	1	96.5	5864	3	0	1	100	6112	3	0	1	105	
			Clear	1-CL	5180	1	0	1	88.7	5388	1	0	1	92.2	5616	1	0	1	96.2
				2-CL	4892	1	0	1	83.8	5089	1	0	1	87.1	5305	1	0	1	90.8
				3-CL	4723	1	0	1	80.9	4913	1	0	1	84.1	5121	1	0	1	87.7
				4W-CL	4763	1	0	2	81.6	4955	1	0	2	84.8	5165	1	0	2	88.4
				1-CL-HS	3205	0	0	1	54.9	3334	0	0	1	57.1	3475	0	0	1	59.5
				2-CL-HS	2788	0	0	1	47.7	2901	0	0	1	49.7	3024	0	0	1	51.8
				3-CL-HS	2696	0	0	1	46.2	2804	0	0	1	48.0	2923	0	0	1	50.0
				4W-CL-HS	2780	0	0	1	47.6	2892	0	0	1	49.5	3015	0	0	1	51.6
	5Q-CL	5194		2	0	1	88.9	5403	2	0	1	92.5	5632	2	0	1	96.4		
	5W-CL	4801	3	0	1	82.2	4994	3	0	1	85.5	5206	3	0	1	89.1			
	Diffused	3-DL	3584	1	0	1	61.4	3728	1	0	1	63.8	3886	1	0	1	66.5		
		5W-DL	3615	2	0	1	61.9	3760	2	0	1	64.4	3919	2	0	1	67.1		
	525	700mA Microcore Crossover	None	1	6235	1	0	1	103.6	6486	1	0	1	107.7	6761	1	0	1	112.3
				2	5889	1	0	1	97.8	6126	1	0	1	101.8	6386	1	0	1	106.1
				3	5686	1	0	2	94.4	5914	1	0	2	98.2	6165	1	0	2	102.4
				4W	5734	1	0	2	95.3	5965	1	0	2	99.1	6218	1	0	2	103.3
				1-HS	3858	0	0	1	64.1	4013	0	0	1	66.7	4183	0	0	1	69.5
				2-HS	3357	0	0	1	55.8	3492	0	0	1	58.0	3640	0	0	1	60.5
				3-HS	3245	0	0	1	53.9	3376	0	0	1	56.1	3519	0	0	1	58.5
				4W-HS	3347	0	0	1	55.6	3482	0	0	1	57.8	3629	1	0	1	60.3
				5Q	6253	2	0	1	103.9	6504	2	0	1	108.0	6780	3	0	1	112.6
			5W	5779	3	0	1	96.0	6012	3	0	1	99.9	6267	3	0	1	104.1	
			Clear	1-CL	5311	1	0	1	88.2	5524	1	0	1	91.8	5758	1	0	1	95.7
				2-CL	5016	1	0	1	83.3	5218	1	0	1	86.7	5439	1	0	1	90.3
				3-CL	4842	1	0	1	80.4	5037	1	0	2	83.7	5251	1	0	2	87.2
4W-CL				4884	1	0	2	81.1	5080	1	0	2	84.4	5296	1	0	2	88.0	
1-CL-HS				3286	0	0	1	54.6	3418	0	0	1	56.8	3563	0	0	1	59.2	
2-CL-HS				2859	0	0	1	47.5	2974	0	0	1	49.4	3100	0	0	1	51.5	
3-CL-HS				2764	0	0	1	45.9	2875	0	0	1	47.8	2997	0	0	1	49.8	
4W-CL-HS				2851	0	0	1	47.4	2965	0	0	1	49.3	3091	0	0	1	51.3	
5Q-CL	5326	2		0	1	88.5	5540	2	0	1	92.0	5775	2	0	1	95.9			
5W-CL	4922	3	0	1	81.8	5120	3	0	1	85.1	5337	3	0	1	88.7				
Diffused	3-DL	3675	1	0	1	61.0	3822	1	0	1	63.5	3984	1	0	1	66.2			
	5W-DL	3735	2	0	1	62.0	3885	2	0	1	64.5	4050	2	0	1	67.3			

DELIVERED LUMENS (CONTINUED)

The table below shows the delivered lumens for the various lumen outputs and beam distributions. Use this chart in connection with the lumen factor (LF) capability to deliver any output required.

LED #	Drive Current	Lumen Package	Lens	Distribution	3000K 70CRI				4000K 70CRI				5000K 70CRI						
					Lumen	Bug Rating			Efficacy (Lm/W)	Lumen	Bug Rating			Efficacy (Lm/W)	Lumen	Bug Rating			Efficacy (Lm/W)
36	615	7500	None	1	7118	1	0	1	101.3	7404	1	0	1	105.4	7718	1	0	1	109.9
				2	6723	1	0	1	95.7	6994	1	0	2	99.6	7290	1	0	2	103.8
				3	6491	1	0	2	92.4	6752	1	0	2	96.1	7038	1	0	2	100.2
				4W	6546	1	0	2	93.2	6809	1	0	2	96.9	7098	1	0	2	101.0
				1-HS	4404	0	0	1	62.7	4581	0	0	1	65.2	4775	0	0	1	68.0
				2-HS	3832	0	0	1	54.5	3986	0	0	1	56.7	4155	0	0	1	59.1
				3-HS	3705	0	0	1	52.7	3854	0	0	1	54.9	4017	0	0	1	57.2
				4W-HS	3821	1	0	1	54.4	3975	1	0	1	56.6	4143	1	0	1	59.0
				5Q	7138	3	0	1	101.6	7425	3	0	1	105.7	7740	3	0	1	110.2
				5W	6598	3	0	1	93.9	6863	3	0	1	97.7	7154	3	0	1	101.8
			Clear	1-CL	6063	1	0	1	86.3	6306	1	0	1	89.8	6574	1	0	1	93.6
				2-CL	5726	1	0	1	81.5	5956	1	0	1	84.8	6209	1	0	1	88.4
				3-CL	5528	1	0	1	78.7	5750	1	0	1	81.9	5994	1	0	2	85.3
				4W-CL	5575	1	0	2	79.4	5800	1	0	2	82.6	6045	1	0	2	86.1
				1-CL-HS	3751	0	0	1	53.4	3902	0	0	1	55.5	4067	0	0	1	57.9
				2-CL-HS	3264	0	0	1	46.5	3395	0	0	1	48.3	3539	0	0	1	50.4
				3-CL-HS	3155	0	0	1	44.9	3282	0	0	1	46.7	3421	0	0	1	48.7
				4W-CL-HS	3254	0	0	1	46.3	3385	0	0	1	48.2	3529	0	0	1	50.2
			Diffused	5Q-CL	6080	2	0	1	86.5	6324	2	0	1	90.0	6592	2	0	1	93.8
				5W-CL	5619	3	0	1	80.0	5845	3	0	1	83.2	6093	3	0	1	86.7
	3-DL	4195	1	0	1	59.7	4364	1	0	1	62.1	4549	1	0	1	64.7			
	5W-DL	4264	2	0	1	60.7	4436	2	0	1	63.1	4624	2	0	1	65.8			

PHOTOMETRY

PROV2-36L-615-4K7-1


LUMINAIRE DATA

Description	4000 Kelvin, 70CRI
Delivered Lumens	7405
Watts	70.25
Efficacy	105.4
IES Type	II
BUG Rating	B1-U0-G1
Mounting Height	15 ft
Grid Scale	15 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	6403	86%
Downward House Side	1002	14%
Downward Total	7405	100%
Upward Street Side	0	0%
Upward House Side	0	0%
Upward Total	0	0%
Total Flux	7405	100%

ISOFOOT CANDLE PLOT

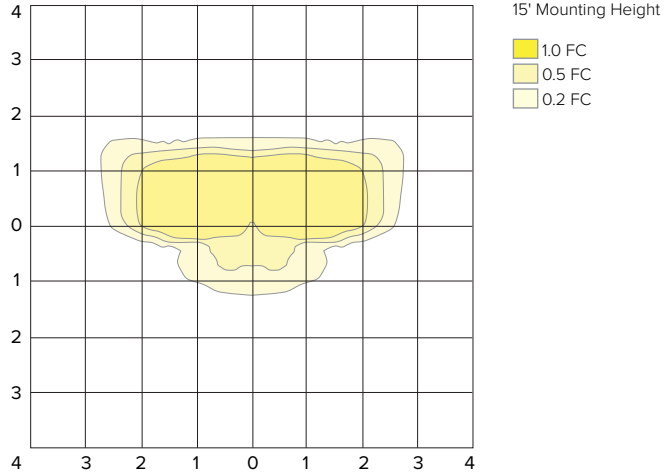

PROV2-36L-615-4K7-2


LUMINAIRE DATA

Description	4000 Kelvin, 70CRI
Delivered Lumens	6994
Watts	70.25
Efficacy	99.6
IES Type	II
BUG Rating	B1-U0-G2
Mounting Height	15 ft
Grid Scale	15 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	5665	81%
Downward House Side	1329	19%
Downward Total	6994	100%
Upward Street Side	0	0%
Upward House Side	0	0%
Upward Total	0	0%
Total Flux	6994	100%

ISOFOOT CANDLE PLOT

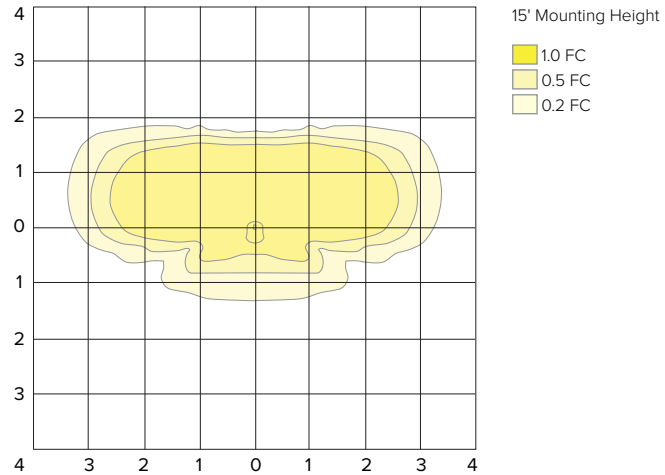

PROV2-36L-615-4K7-3


LUMINAIRE DATA

Description	4000 Kelvin, 70CRI
Delivered Lumens	6752
Watts	70.25
Efficacy	96.1
IES Type	III
BUG Rating	B1-U0-G2
Mounting Height	15 ft
Grid Scale	15 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	5552	82%
Downward House Side	1200	18%
Downward Total	6752	100%
Upward Street Side	0	0%
Upward House Side	0	0%
Upward Total	0	0%
Total Flux	6752	100%

ISOFOOT CANDLE PLOT

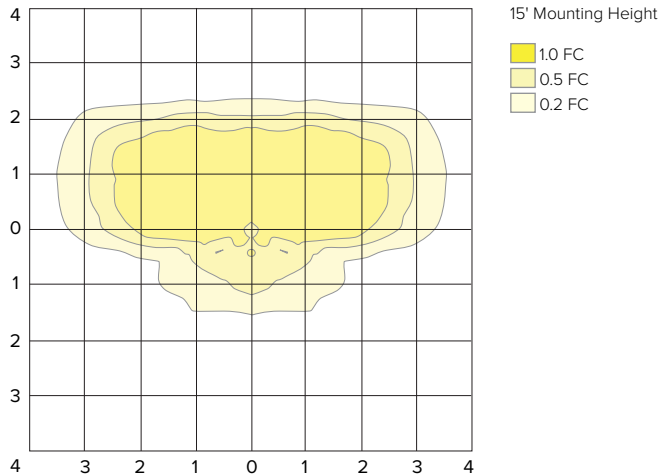

PHOTOMETRY

PROV2-36L-615-4K7-4W


LUMINAIRE DATA

Description	4000 Kelvin, 70CRI
Delivered Lumens	6809
Watts	70.25
Efficacy	96.9
IES Type	IV Wide
BUG Rating	B1-U0-G2
Mounting Height	15 ft
Grid Scale	15 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	5802	85%
Downward House Side	1007	15%
Downward Total	6809	100%
Upward Street Side	0	0%
Upward House Side	0	0%
Upward Total	0	0%
Total Flux	6809	100%

ISOFOOT CANDLE PLOT

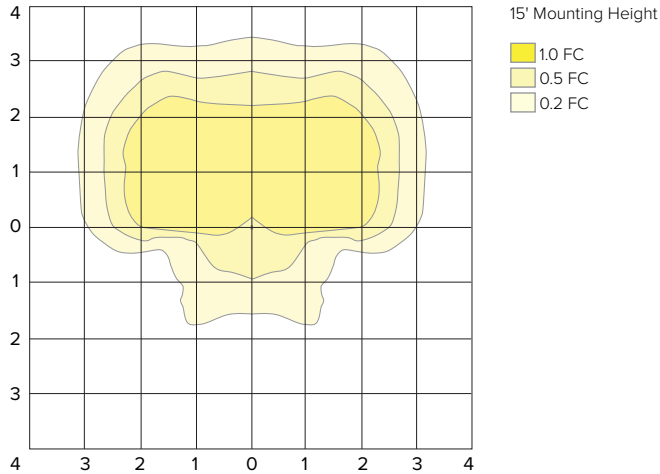

PROV2-36L-615-4K7-5Q


LUMINAIRE DATA

Description	4000 Kelvin, 70CRI
Delivered Lumens	7425
Watts	70.25
Efficacy	105.7
IES Type	VS
BUG Rating	B3-U0-G1
Mounting Height	15 ft
Grid Scale	15 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	3713	50%
Downward House Side	3713	50%
Downward Total	7425	100%
Upward Street Side	0	0%
Upward House Side	0	0%
Upward Total	0	0%
Total Flux	7425	100%

ISOFOOT CANDLE PLOT

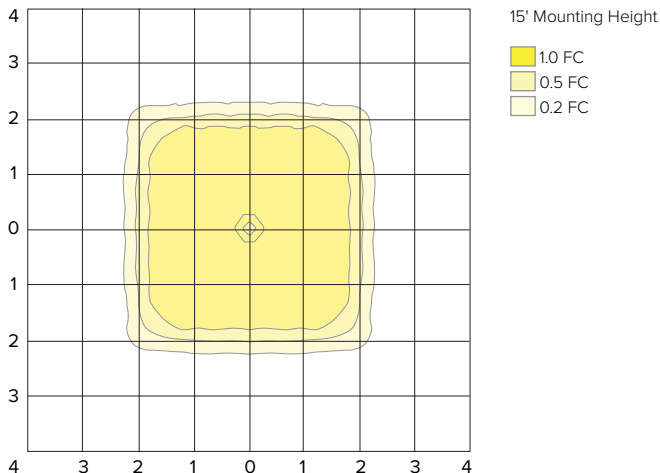

PROV2-36L-615-4K7-5W


LUMINAIRE DATA

Description	4000 Kelvin, 70CRI
Delivered Lumens	6863
Watts	70.25
Efficacy	97.7
IES Type	VS
BUG Rating	B3-U0-G1
Mounting Height	15 ft
Grid Scale	15 ft

ZONAL LUMEN SUMMARY


Zone	Lumens	% Luminaire
Downward Street Side	3432	50%
Downward House Side	3432	50%
Downward Total	6863	100%
Upward Street Side	0	0%
Upward House Side	0	0%
Upward Total	0	0%
Total Flux	6863	100%

ISOFOOT CANDLE PLOT

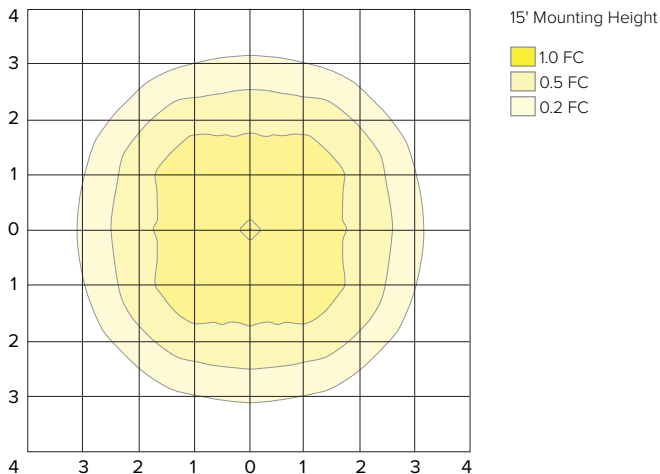

TM-30 DATA

COLOR VECTOR GRAPHIC

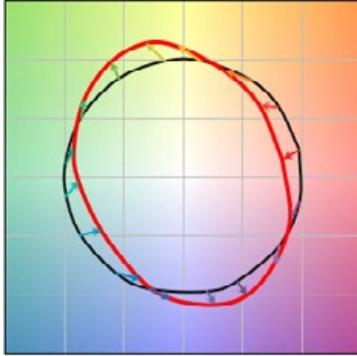


— Reference Illuminant — Test Source

TEST SOURCE

MBM TEST RESULTS	
CCT (K)	3947
CIE Ra	72
Duv	0.0004
x	0.3831
y	0.3793
Rf	68
Rg	99

SPECTRAL POWER DISTRIBUTION COMPARISON

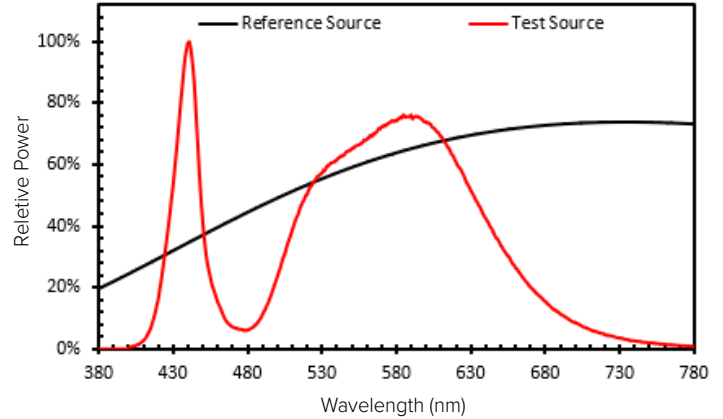

ELECTRICAL DATA

Light Engine	Electrical								Min. Power Factor	Max THD (%)	Dimming				
	System Current	System Watts	Line Voltage		Amps AC						Dimming Range	Source current out of 0-10V		Absolute voltage range on 0-10V (+)	
			VAC	HZ	120	208	240	277				Min	Max	Min	Max
36	295 mA	34.1	120-277	50/60	0.28	0.16	0.14	0.12	>0.9	20	10% to 100%	0mA	1mA	0V	10V
	325 mA	37.8			0.32	0.18	0.16	0.14							
	510 mA	58.4			0.49	0.28	0.24	0.21							
	525 mA	60.2			0.50	0.29	0.25	0.22							
	615 mA	70.3			0.59	0.34	0.29	0.25							

TM-21 LIFETIME CALCULATION - PROJECTED LUMEN MAINTENANCE (25°C / 77°F)						
HOURS	0	25,000	36,000	50,000	100,000	REPORTED L70
Projected Lumen Maintenance	100%	98.0%	96.9%	95.4%	90.5%	> 60,000

AMBER MULTIPLIER	
CCT	MULTIPLIER
5000K	1
AM	0.1727

2700K MULTIPLIER	
CCT	MULTIPLIER
5000K	1
2700K	0.897

LENS OPTION MULTIPLIER	
CLEAR LENS	DIFFUSED LENS
0.8517	0.6462