

AAL ARMS

SPECIFICATIONS

CONSTRUCTION

- The arm shall be of one piece unitized aluminum construction, fully welded and assembled. The slip fitter shall be cast aluminum with an internal wireway and pole stop. The arm shall be prewired with a quick connector for easy installation.
- The arm shall have a cast aluminum fitter welded to the top of the arm for attaching the fixture. The fixture shall be mounted with three stainless steel bolts through the top of the arm fitter into the fixture. The attachment point shall have a silicone pad for sealing the fixture to arm connection.
- The arm shall slip over a 4"/100mm diameter pole or tenon. The cast aluminum slip fitter shall have six stainless steel cup point set screws for securing the arm to the pole or tenon.



ORDERING GUIDE

Example: SLA4-BLT

CATALOG #


HOUSING

Arm	Color	
SLA4 Slips over 4" pole. Weight: 14 lbs. EPA: 1.39	BLS Black Gloss Smooth	
	BLT Black Matte Textured	
	DBS Dark Bronze Gloss Smooth	
	DBT Dark Bronze Matte Textured	
	GTT Graphite Matte Textured	
	LGS Light Grey Gloss Smooth	
	LGT Light Grey Matte Textured	
	PSS Platinum Silver Gloss Smooth	
	VGT Verde Green Matte Textured	
	WHS White Gloss Smooth	
	WHT White Matte Textured	
	Color Option	
	CC¹ Custom Color	


Notes:

- 1 Consult factory for custom color, marine and corrosive finish

DIMENSIONS

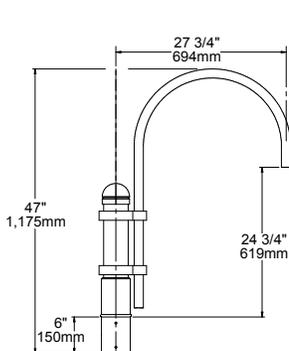

SLA4 (4" pole)

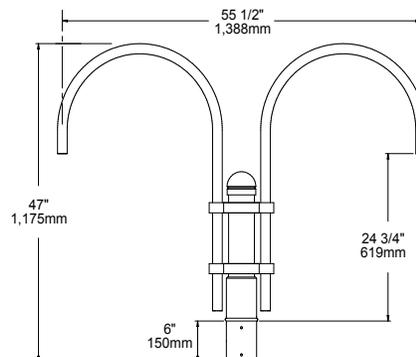

SLA4-2 (4" pole)