

AAL ARMS

SPECIFICATIONS

CONSTRUCTION

- The arm shall be one piece cast aluminum construction. The arm shall be prewired with a quick connector for easy installation.
- The arm shall have a cast aluminum fitter welded to the top of the arm(s) for attaching the fixture. The fixture shall be mounted with three stainless steel bolts through the top of the arm fitter into the fixture. The attachment point shall have a silicone pad for sealing the fixture to arm connection.
- The arm shall bolt to a 4"/100mm diameter pole.



ORDERING GUIDE

Example: TRA60-BLT

CATALOG #


HOUSING

| Arm | Color |
|---------------------------------|--|
| TRA60 Weight: 35 lbs. EPA: 2.40 | BLS Black Gloss Smooth BLT Black Matte Textured DBS Dark Bronze Gloss Smooth DBT Dark Bronze Matte Textured GTT Graphite Matte Textured LGS Light Grey Gloss Smooth LGT Light Grey Matte Textured PSS Platinum Silver Gloss Smooth VGT Verde Green Matte Textured WHS White Gloss Smooth WHT White Matte Textured |
| | Color Option |
| | CC ¹ Custom Color |

Notes:

- 1 Consult factory for custom color, marine and corrosive finish

DIMENSIONS

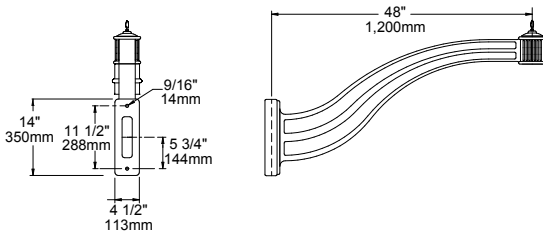

TRA60