


**AAL ARMS**

**SPECIFICATIONS**

**CONSTRUCTION**

- The arm shall be one piece cast aluminum construction. The arm shall be prewired with a quick connector for easy installation.
- The arm shall have a cast aluminum fitter welded to the top of the arm(s) for attaching the fixture. The fixture shall be mounted with three stainless steel bolts through the top of the arm fitter into the fixture. The attachment point shall have a silicone pad for sealing the fixture to arm connection.
- The arm shall bolt to a 4"/100mm O.D. pole.

Note: Fixture type and mounting orientation will determine size of arm tail.



**ORDERING GUIDE**

Example: TRA6U-BLT

CATALOG #


**HOUSING**

Arm	Color
<b>TRA6U</b> Mount up. Weight: 9 lbs. EPA: .62	<b>BLS</b> Black Gloss Smooth
<b>TRA6D</b> Mount down. Weight: 9 lbs. EPA: .62	<b>BLT</b> Black Matte Textured
	<b>DBS</b> Dark Bronze Gloss Smooth
	<b>DBT</b> Dark Bronze Matte Textured
	<b>GTT</b> Graphite Matte Textured
	<b>LGS</b> Light Grey Gloss Smooth
	<b>LGT</b> Light Grey Matte Textured
	<b>PSS</b> Platinum Silver Gloss Smooth
	<b>VGT</b> Verde Green Matte Textured
	<b>WHS</b> White Gloss Smooth
	<b>WHT</b> White Matte Textured
	<b>Color Option</b>
	<b>CC<sup>1</sup></b> Custom Color

Notes:

- 1 Consult factory for custom color, marine and corrosive finish

**DIMENSIONS**

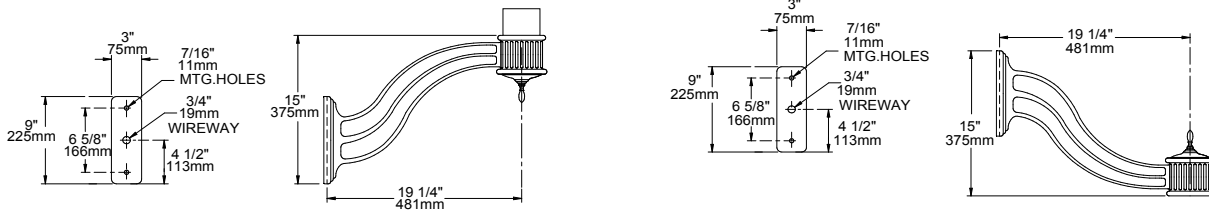

TRA6U (4" or 5" pole)

TRA6D (4" or 5" pole)