


Banner Arms

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

Banner Arm Mounting Styles

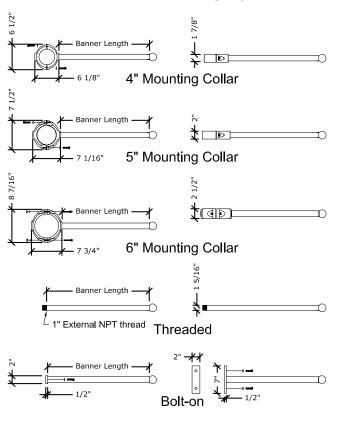

Specifications


Construction:

All cast aluminum parts shall low copper alloy A356. All extruded aluminum parts shall be alloy 6061-T6, 6063-T5 or equal.

All fasteners shall be stainless steel. When tamper resistant fasteners are required, spanner HD (snake eye) style shall be provided (special tool required, available at additional cost), consult factory for availability.


Finish:

Finish shall be Beacote III polyester powdercoat electrostatically applied and thermocured. Poles shall be subjected to chemical pre-treatment prior to painting by immersion process.



Ordering Example:

AA-0024 / 4"MTC / BA / BKT

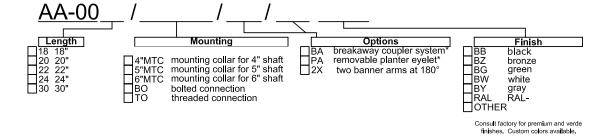

Notes:

* Consult factory