



# CLSC Series

CHICAGO LED STEEL COMBINATION EXIT/EMERGENCY LIGHT

DATE: \_\_\_\_\_ LOCATION: \_\_\_\_\_

TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_

CATALOG #: \_\_\_\_\_

## FEATURES

- Universal 120/277VAC input, 60Hz.
- Includes 6VDC sealed lead acid battery
- Full re-charge within 24 hours
- Includes LVD(low voltage disconnect) to protect the battery from deep discharge
- Includes AC-On LED indicator and Push-to-Test switch
- Remote Capacity option
- UL924 Damp Location Listed, 20°C to 50°C



## RELATED PRODUCTS

- CCEL Series - Emergency Light
- CLS Series - Chicago Steel LED Exit Sign



## SPECIFICATIONS

### DESCRIPTION

- The CLSC Series is a Chicago Approved combination exit/emergency light that uses 2 each 5.3W adjustable white LED lamp-heads to provide emergency lighting for the required 120 minutes
- The CLSC can be wall mounted by use of a back-plate, which includes a universal knock-out pattern or ceiling/end mount by use of a supplied canopy
- Available with 6" tall, 3/4" stroke STAIRS or EXIT red lettered panels in single or double-face
- Housing made of durable 20 gauge steel with panels made of glass

### APPLICATION

- The CLSC Series can be applied inside buildings for general EXIT or STAIRS panel illumination with directional arrow indication, and stairwells that are susceptible to moisture
- The series also includes a No Panel option (-NP for standard model and -NPRC for remote capacity model) which does not include the glass panels for single or double-face
- The individual glass panels need to be selected and ordered separately

### INSTALLATION

- Universal mounting (ceiling, end, wall) to standard 3 1/2" or 4" octagon or square electrical box by use of easily removed, template configured knockouts
- All mounting hardware is fully concealed

### COMPLIANCES

- City of Chicago
- UL924 Damp Location Listed
- NFPA 101
- OSHA

### WARRANTY

- 5 year full unit warranty



# CLSC Series

CHICAGO LED STEEL COMBINATION EXIT/EMERGENCY LIGHT

DATE: \_\_\_\_\_ LOCATION: \_\_\_\_\_

TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_

CATALOG #: \_\_\_\_\_

## ORDERING GUIDE

CATALOG #  Example: CLSCRW-3

CLSC		R	W		
Model	Faces	Letter Color	Housing Color	Options	Panel Code
CLSC Chicago Steel Emergency Light/ Exit Sign	S Single D Double	R Red	W White	RC Remote Capacity Blank No Remote Capacity	<b>Single Face Models</b> 3 "EXIT" (no arrows) 6 "EXIT" (right arrow) 9 "EXIT" (left arrow) 12 "EXIT" (double arrow)  2 "STAIRS" (no arrows) 5 "STAIRS" (right arrow) 8 "STAIRS" (left arrow) 11 "STAIRS" (double arrow)  <b>Double Face Models</b> 18 "EXIT" (no arrows) 21 "EXIT" (right / left arrow) 24 "EXIT" (double arrow)  17 "STAIRS" (no arrows) 20 "STAIRS" (right / left arrow) 23 "STAIRS" (double arrow)

- Notes:
- The CLSC can be ordered fully configured as above or by stocked model
  - Remote capacity model has 10 watts remote capacity to run CRH (Indoor or Outdoor remote heads for Chicago)

## STOCKED OPTIONS

### HOUSING

Catalog Number	Description
CLSCRW-3	Steel Combination Exit/Unit, No Arrows (CP#-ENA)
CLSCRW-NP	Steel Combination Exit/Unit, No Panel Included

### PANEL

Catalog Number	Description
CP3-ENA	Exit No Arrow
CP12-EDA	Exit Double Arrow
CP6-ERA	Exit Right Arrow
CP9-ELA	Exit Left Arrow
CP2-SNA	Stairs No Arrow
CP11-SDA	Stairs Double Arrow
CP5-SRA	Stairs Right Arrow
CP8-SRA	Stairs Left Arrow

- Notes:
- Order the -NPE option for **single or double-face** and select the required panels separately
  - When ordering double-face with -NPE, ensure 2 panels are selected.
  - For -NPE option in double-face with directional arrow, ensure a left and right arrow is selected
- Example: Order CLSS-NPE with CP6-ERA and CP9-ERA to make a double-face with both arrows pointing in one direction.**



CLSS3



CP3-ENA



CP2-SNA




# CLSC Series

CHICAGO LED STEEL COMBINATION EXIT/EMERGENCY LIGHT


## SPECIFICATIONS

### PANEL FACE CONFIGURATIONS

Single-Face Selections

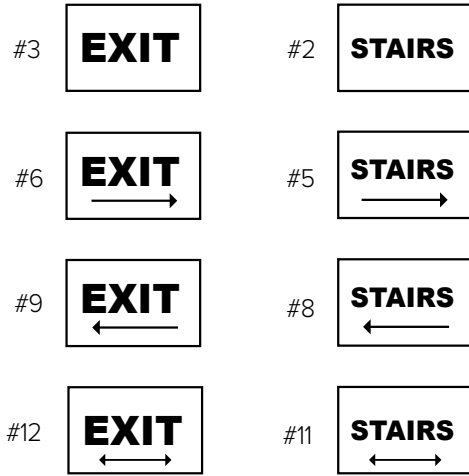

Double-Face Selections

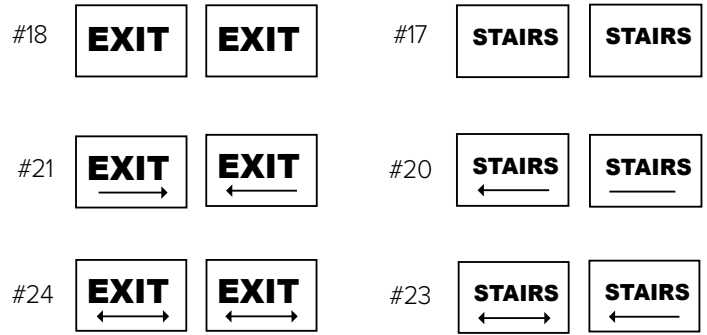

## DIMENSIONS

