


OCR-03L Series

DECORATIVE OUTDOOR REMOTE LIGHTING HEADS

FEATURES

Outdoor UL Wet Location Listed die-cast aluminum lamp head and mounting plate assembly complete with LED MR16 lamp. Single or twin lamp fixtures available in dark bronze, black or white polyester powder coat finish. Mounts to 3½" octagonal or single gang boxes. Available with 3-watt LED lamps.

ORDERING GUIDE






CATALOG #:



APPLICATION INFORMATION

z

Dark Bronze

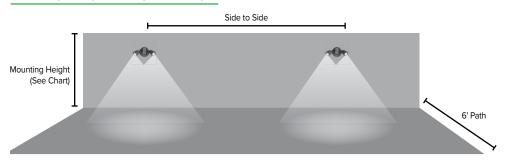

1fc avg.	Depth	Width
7.5' Mounting Height	48'	6'
9.0' Mounting Height	42'	6'
1fc min.	Depth	Width
1fc min. 7.5' Mounting Height	Depth 22'	Width 6'

OCR-03L Multi double-head unit Side to Side

OCR-03L One double-head unit	ne double-head unit Forward Throw	
1fc avg.	Depth	Width
7.5' Mounting Height	27	10'
9.0' Mounting Height	23	10'
1fc min.	Depth	Width
7.5' Mounting Height	7	10'
9.0' Mounting Height	9	10'

Meets Life Safety Code minimum illuminance of 0.1 fc and average illuminance of 1.0 fc. Assumes open space with no obstructions, mounting height of 7.5', ceiling height of 9' and reflectances of 80/50/20. Photometry files available on the Dual-Lite website.


Forward Throw (D) (W)

PHOTOMETRY

LUMINAIRE DATA

Test No.	P22.00079
Description	Remote Emergency Head
Watts	2.6
Efficacy	96.9 lm/W
Mounting	Surface

POLAR GRAPH





DECORATIVE INDOOR REMOTE LIGHTING HEADS

DATE:	LOCATION:		
TYPE:	PROJECT:		
CATALOG #:			

FEATURES

Injection molded thermoplastic decorative lamphead and mounting plate assembly. Mounts to $3\frac{1}{2}$ " octagonal or single gang boxes. Single and twin lamp fixtures with LED MR16 lamp included. Available in white finish.



ORDERING GUIDE

CATALOG #

CPR						
Model	He	ads	Fin	ish	Lamp	
CPR	S D	Single Double	w	White	-03L	6V/12V, 3W LED MR16 Lamp

Other Remotes REFER TO PRODUCT SPECIFIC PAGES

Example: CPRSW-03L







DLR Series



PGR Series



EVHCR Series



