


Entablature®

FEATURES

- TIR Strike Optics
- Available in Monochromatic Amber, 2700K, 3000K, 3500K, 4000K and 5000K
- Type 1, 2, 3, 4, 4W, 5W, 5QM, L, and R distributions
- 0 - 10V dimming drivers standard
- IP65 optical assembly

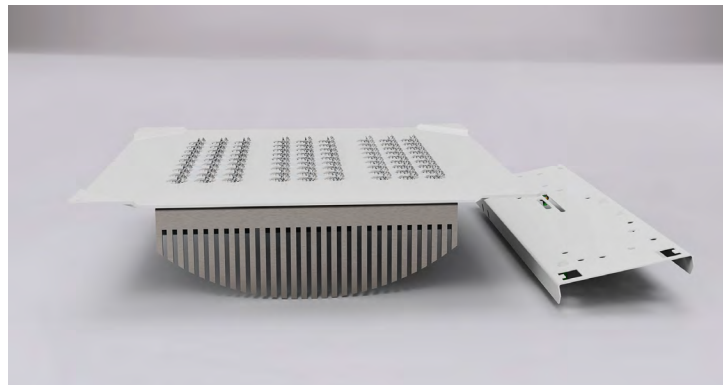

RELATED PRODUCTS

Ouro

Pavilion

PGL8

SPECIFICATIONS

CONSTRUCTION

- One piece die-cast housing, low copper (<0.6% Cu) Aluminum Alloy with integral cooling ribs over the optical chamber and electrical compartment
- All hardware is stainless steel or electro-zinc plated steel
- Finish: fade and abrasion resistant, electrostatically applied, thermally cured, triglycidyl isocyanurate (TGIC) polyester powdercoat

INSTALLATION

- Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury

OPTICS

- Optical cartridge system consisting of a die cast heat sink, LED Total Internal Reflection (TIR) optics, gasket and bezel plate

OPTICS (CONTINUED)

- Molded silicone gasket ensures a weather-proof seal around each individual LED
- Features revolutionary individual LED optical control based on high performance TIR optical designs
- Optional BackLight Control for complete control of unwanted backlight
- IP65 Optical assembly
- Type 1, 2, 3, 4, 4W, 5W, 5QM, R, and L standard distributions
- Available in Monochromatic Amber, 2700K, 3000K, 3500K, 4000K and 5000K
- Die-cast, low copper aluminum heat sink modules provide thermal transfer at PCB level
- Anodized aluminum heat sink modules

ELECTRICAL

- Dimming range from 10% to 100% through the use of standard 0-10V interface on the programmable driver
- Modular wiring harness in the service area provides user access to the dimming circuitry
- Optional factory programmed dimming profile
- Surge protection: 10kV surge suppression
- SF for 120, 277, 347 Line volts
DF for 208, 240, 480 Line volts

CERTIFICATIONS AND LISTINGS

- Listed to UL1598 and CSA C22.2#250.0-24 for wet location and 40°C ambient temperatures
- RoHS compliant

WARRANTY

- 5 year warranty

DATE:

LOCATION:

TYPE:

PROJECT:

CATALOG #:

ORDERING GUIDE

ETK2											
Kit		LED Engine		CCT/CRI ³		Distribution	Voltage	Fixture Finish			
ETK2	Entablature 2.0 Large Kit	54L-560	54 LEDs - 11,000 Lumens	AM ⁴	Monochromatic Amber	1	Type I	UNV	120-277V	BLS	Black Gloss Smooth
		54L-750	54 LEDs - 14,000 Lumens	27K8 ²	2700K, 80CRI	2	Type II	347	347V	BLT	Black Matte Textured
		81L-700	81 LEDs - 19,000 Lumens	27K9 ²	2700K, 90CRI	3	Type III	480	480V	DBS	Dark Bronze Gloss Smooth
				3K7	3000K, 70CRI	4	Type IV Forward			DBT	Dark Bronze Matte Textured
				3K8 ²	3000K, 80CRI	4W	Type IV Wide			GTT	Graphite Matte Textured
				3K9 ²	3000K, 90CRI	5W	Type V Wide			LGS	Light Grey Gloss Smooth
				35K8 ²	3500K, 80CRI	5QM	Type V Square Medium			LGT	Light Grey Matte Textured
				35K9 ²	3500K, 90CRI	R	Corner Right			PSS	Platinum Silver Smooth
				4K7	4000K, 70CRI	L	Corner Left			VGt	Verde Green Matte Textured
				4K8 ²	4000K, 80CRI					WHS	White Gloss Smooth
				4K9 ²	4000K, 90CRI					WHT	White Matte Textured
				5K7	5000K, 70CRI					Color Option	
				5K8 ²	5000K, 80CRI					CC	Custom Color
				5K9 ²	5000K, 90CRI						

House Side Shield	Fuse Options
BC ¹ Backlight Control	SF 120, 277, 347 Line Volts DF 208, 240, 480 Line Volts

Notes:

1

Back Light Control not available for Type 5Q and Type 5W

2

See Lumen Multiplier chart on [Page 11](#) for lumen scaling factor. Consult factory for additional details.

3

5-step MacAdam Ellipse Binning is standard. Consult factory for 3-step MacAdam Ellipse Binning

4

Turtle Friendly.

ETK2

LED UPGRADE KIT

DELIVERED LUMENS

NO LENS

LED #	Nominal Lumen Package	Drive Current	Distribution	3000K 70CRI					4000K 70CRI					5000K 70CRI				
				Lumen	BUG Rating			lm/w	Lumen	BUG Rating			lm/w	Lumen	BUG Rating			lm/w
					B	U	G			B	U	G			B	U	G	
54	11,000	560	1	10664	1	0	1	120.2	10802	1	0	1	121.7	11380	1	0	1	128.3
			1-BC	6020	0	0	0	67.8	6098	0	0	0	68.7	6424	0	0	1	72.4
			2	9651	2	0	2	108.8	9776	2	0	2	110.2	10299	2	0	2	116.1
			2-BC	5304	0	0	1	59.8	5373	0	0	1	60.6	5660	0	0	1	63.8
			3	9901	1	0	2	111.6	10029	1	0	2	113.0	10566	1	0	2	119.1
			3-BC	5426	0	0	2	61.2	5496	0	0	2	61.9	5791	0	0	2	65.3
			4	10301	1	0	2	116.1	10435	1	0	2	117.6	10994	1	0	2	123.9
			4-BC	7046	0	0	2	79.4	7138	0	0	2	80.4	7520	0	0	2	84.8
			4W	9545	1	0	2	107.6	9669	1	0	2	109.0	10186	1	0	2	114.8
			4W-BC	5724	0	0	2	64.5	5798	0	0	2	65.3	6108	0	0	2	68.8
			5W	9561	3	0	2	107.7	9685	3	0	2	109.1	10203	3	0	2	115.0
			5QM	10254	3	0	1	115.6	10387	3	0	1	117.1	10943	3	0	1	123.3
	14,000	750	R	10021	2	0	2	112.9	10151	2	0	2	114.4	10695	2	0	2	120.5
			L	10021	1	0	2	112.9	10151	1	0	2	114.4	10695	1	0	2	120.5
			1	14256	1	0	1	112.9	14441	1	0	1	114.4	15213	1	0	1	120.5
			1-BC	8048	0	0	1	63.7	8152	0	0	1	64.6	8588	0	0	1	68.0
			2	12901	2	0	2	102.2	13069	2	0	2	103.5	13768	2	0	2	109.0
			2-BC	7090	0	0	1	56.2	7183	0	0	1	56.9	7567	0	0	2	59.9
			3	13236	2	0	2	104.8	13407	2	0	2	106.2	14125	2	0	2	111.9
			3-BC	7254	0	0	2	57.4	7348	0	0	2	58.2	7741	0	0	2	61.3
			4	13771	1	0	3	109.1	13950	1	0	3	110.5	14696	1	0	3	116.4
			4-BC	9420	0	0	2	74.6	9542	0	0	2	75.6	10052	0	0	2	79.6
			4W	12760	2	0	3	101.1	12926	4	0	2	102.4	13618	2	0	3	107.8
			4W-BC	7652	0	0	2	60.6	7751	0	0	2	61.4	8166	0	0	2	64.7
81	19,500	700	5W	12781	4	0	2	101.2	12947	2	0	3	102.5	13640	4	0	2	108.0
			5QM	13708	3	0	1	108.6	13886	3	0	1	110.0	14629	4	0	1	115.9
			R	13397	2	0	2	106.1	13571	2	0	2	107.5	14297	2	0	3	113.2
			L	13397	2	0	2	106.1	13571	2	0	2	107.5	14297	2	0	3	113.2
			1	19820	2	0	1	111.2	20077	2	0	1	112.6	21151	2	0	1	118.7
			1-BC	11188	0	0	1	62.8	11334	0	0	1	63.6	11940	0	0	1	67.0
			2	17937	2	0	2	100.6	18169	2	0	2	101.9	19142	3	0	3	107.4
			2-BC	9858	0	0	2	55.3	9986	0	0	2	56.0	10520	0	0	2	59.0
			3	18402	2	0	3	103.2	18640	2	0	3	104.6	19638	2	0	3	110.2
			3-BC	10085	0	0	2	56.6	10216	0	0	2	57.3	10762	0	0	2	60.4
			4	19146	2	0	4	107.4	19395	2	0	4	108.8	20433	2	0	4	114.6
			4-BC	13096	0	0	3	73.5	13266	0	0	3	74.4	13976	0	0	3	78.4
			4W	17741	2	0	4	99.5	17971	2	0	4	100.8	18933	2	0	4	106.2
			4W-BC	10638	1	0	2	59.7	10776	1	0	3	60.5	11353	1	0	3	63.7
			5W	17769	4	0	2	99.7	18000	4	0	2	101.0	18963	4	0	2	106.4
			5QM	19058	4	0	2	106.9	19305	4	0	2	108.3	20338	4	0	2	114.1
			R	18625	2	0	3	104.5	18867	2	0	3	105.9	19877	3	0	3	111.5
			L	18625	2	0	3	104.5	18867	2	0	3	105.9	19877	2	0	3	111.5

ETK2

LED UPGRADE KIT

DELIVERED LUMENS (CONTINUED)

CLR LENS

LED #	Nominal Lumen Package	Drive Current	Distribution	3000K 70CRI					4000K 70CRI					5000K 70CRI				
				Lumen	BUG Rating			lm/w	Lumen	BUG Rating			lm/w	Lumen	BUG Rating			lm/w
					B	U	G			B	U	G			B	U	G	
54	11,000	560	1	8907	1	0	1	100.4	9023	1	0	1	101.7	9506	1	0	1	107.1
			1-BC	5028	0	0	0	56.7	5094	0	0	0	57.4	5366	0	0	0	60.5
			2	8061	1	0	2	90.8	8166	1	0	2	92.0	8603	1	0	2	97.0
			2-BC	4430	0	0	1	49.9	4488	0	0	1	50.6	4728	0	0	1	53.3
			3	8270	1	0	2	93.2	8377	1	0	2	94.4	8826	1	0	2	99.5
			3-BC	4532	0	0	1	51.1	4591	0	0	1	51.7	4837	0	0	2	54.5
			4	8605	1	0	2	97.0	8716	1	0	2	98.2	9183	1	0	2	103.5
			4-BC	5885	0	0	2	66.3	5962	0	0	2	67.2	6281	0	0	2	70.8
			4W	7973	1	0	2	89.9	8076	1	0	2	91.0	8509	1	0	2	95.9
			4W-BC	4781	0	0	2	53.9	4843	0	0	2	54.6	5102	0	0	2	57.5
			5W	7986	3	0	1	90.0	8089	3	0	1	91.2	8522	3	0	2	96.0
			5QM	8565	3	0	1	96.5	8676	3	0	1	97.8	9140	3	0	1	103.0
			R	8371	3	0	1	94.3	8479	1	0	2	95.6	8933	1	0	2	100.7
			L	8371	1	0	2	94.3	8479	1	0	2	95.6	8933	1	0	2	100.7
	14,000	750	1	11907	1	0	1	94.3	12062	1	0	1	95.5	12708	1	0	1	100.6
			1-BC	6722	0	0	1	53.2	6809	0	0	1	53.9	7174	0	0	1	56.8
			2	10776	2	0	2	85.3	10916	2	0	2	86.4	11500	2	0	2	91.1
			2-BC	5923	0	0	1	46.9	5999	0	0	1	47.5	6321	0	0	1	50.1
			3	11056	1	0	2	87.6	11199	1	0	2	88.7	11798	1	0	2	93.4
			3-BC	6059	0	0	2	48.0	6137	0	0	2	48.6	6466	0	0	2	51.2
			4	11503	1	0	2	91.1	11652	1	0	2	92.3	12276	1	0	2	97.2
			4-BC	7868	0	0	2	62.3	7970	0	0	2	63.1	8397	0	0	2	66.5
			4W	10658	1	0	2	84.4	10797	1	0	2	85.5	11375	1	0	3	90.1
			4W-BC	6391	0	0	2	50.6	6474	0	0	2	51.3	6821	0	0	2	54.0
			5W	10676	3	0	2	84.5	10814	3	0	2	85.6	11393	3	0	2	90.2
			5QM	11450	3	0	1	90.7	11598	3	0	1	91.9	12219	3	0	1	96.8
			R	11190	2	0	2	88.6	11335	2	0	2	89.8	11942	2	0	2	94.6
			L	11190	1	0	2	88.6	11335	1	0	2	89.8	11942	1	0	2	94.6

ETK2

LED UPGRADE KIT

DELIVERED LUMENS (CONTINUED)

PL LENS

LED #	Nominal Lumen Package	Drive Current	Distribution	3000K 70CRI					4000K 70CRI					5000K 70CRI				
				Lumen	BUG Rating			lm/w	Lumen	BUG Rating			lm/w	Lumen	BUG Rating			lm/w
					B	U	G			B	U	G			B	U	G	
54	11,000	560	1	8772	1	0	1	98.9	8886	1	0	1	100.2	9362	1	0	1	105.5
			1-BC	4952	0	0	0	55.8	5016	0	0	0	56.5	5285	0	0	0	59.6
			2	7939	1	0	1	89.5	8042	1	0	2	90.6	8472	1	0	2	95.5
			2-BC	4363	0	0	1	49.2	4420	0	0	1	49.8	4656	0	0	1	52.5
			3	8145	1	0	2	91.8	8251	1	0	2	93.0	8692	1	0	2	98.0
			3-BC	4464	0	0	1	50.3	4522	0	0	1	51.0	4764	0	0	1	53.7
			4	8475	1	0	2	95.5	8584	1	0	2	96.7	9044	1	0	2	101.9
			4-BC	5797	0	0	2	65.3	5872	0	0	2	66.2	6186	0	0	2	69.7
			4W	7852	1	0	2	88.5	7954	1	0	2	89.6	8380	1	0	2	94.4
			4W-BC	4709	0	0	2	53.1	4770	0	0	2	53.8	5025	0	0	2	56.6
			5W	7865	3	0	1	88.6	7967	3	0	1	89.8	8393	3	0	2	94.6
			5QM	8435	3	0	1	95.1	8545	3	0	1	96.3	9002	3	0	1	101.5
			R	8244	1	0	2	92.9	8351	1	0	2	94.1	8798	1	0	2	99.2
			L	8244	1	0	2	92.9	8351	1	0	2	94.1	8798	1	0	2	99.2
	14,000	750	1	11727	1	0	1	92.9	11880	1	0	1	94.1	12515	1	0	1	99.1
			1-BC	6620	0	0	1	52.4	6706	0	0	1	53.1	7065	0	0	1	56.0
			2	10613	2	0	2	84.1	10751	2	0	2	85.1	11326	2	0	2	89.7
			2-BC	5833	0	0	1	46.2	5909	0	0	1	46.8	6225	0	0	1	49.3
			3	10888	1	0	2	86.2	11030	1	0	2	87.3	11620	1	0	2	92.0
			3-BC	5967	0	0	2	47.3	6045	0	0	2	47.9	6368	0	0	2	50.4
			4	11329	1	0	2	89.7	11476	1	0	2	90.9	12090	1	0	2	95.7
			4-BC	7749	0	0	2	61.4	7849	0	0	2	62.2	8270	0	0	2	65.5
			4W	10497	1	0	2	83.1	10633	1	0	2	84.2	11203	1	0	3	88.7
			4W-BC	6295	0	0	2	49.8	6376	0	0	2	50.5	6718	0	0	2	53.2
			5W	10514	3	0	2	83.3	10651	3	0	2	84.3	11221	3	0	2	88.9
			5QM	11277	3	0	1	89.3	11423	3	0	1	90.5	12034	3	0	1	95.3
			R	11021	2	0	2	87.3	11164	2	0	2	88.4	11761	2	0	2	93.1
			L	11021	1	0	2	87.3	11164	1	0	2	88.4	11761	1	0	2	93.1

ETK2

LED UPGRADE KIT

PHOTOMETRY

ET2-54L-750-4K7-1


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	14440
Watts	126.27
Efficacy	114.4
IES Type	1
BUG Rating	B1-U0-G1
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	12851	89.0%
Downward House Side	1589	11.0%
Downward Total	14440	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	14440	100%

ISOFOOT CANDLE PLOT

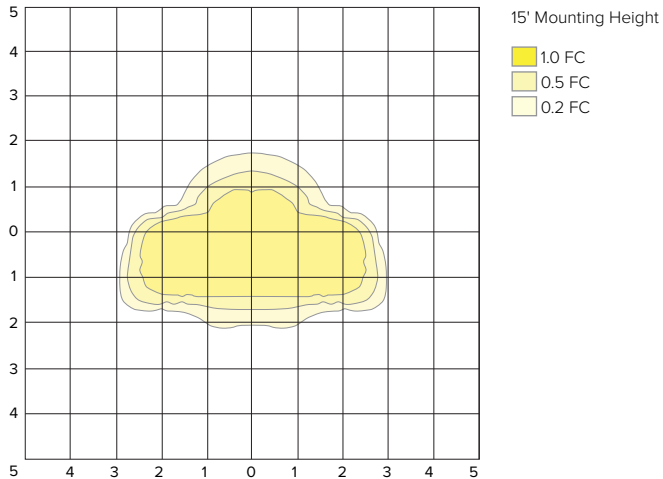

ET2-54L-750-4K7-1-BC


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	8151
Watts	126.27
Efficacy	64.6
IES Type	1
BUG Rating	B0-U0-G1
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	8033	98.5%
Downward House Side	118	1.5%
Downward Total	8151	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	8151	100%

ISOFOOT CANDLE PLOT

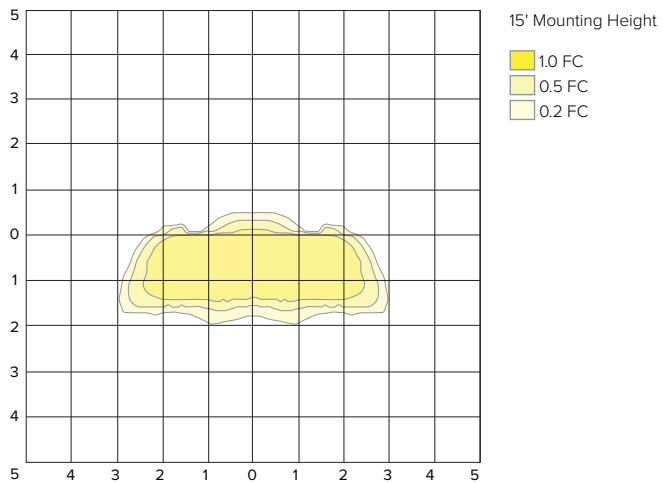

ET2-54L-750-4K7-2


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	13069
Watts	126.27
Efficacy	103.5
IES Type	2
BUG Rating	B2-U0-G2
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	10825	82.8%
Downward House Side	2245	17.2%
Downward Total	13069	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	13069	100%

ISOFOOT CANDLE PLOT

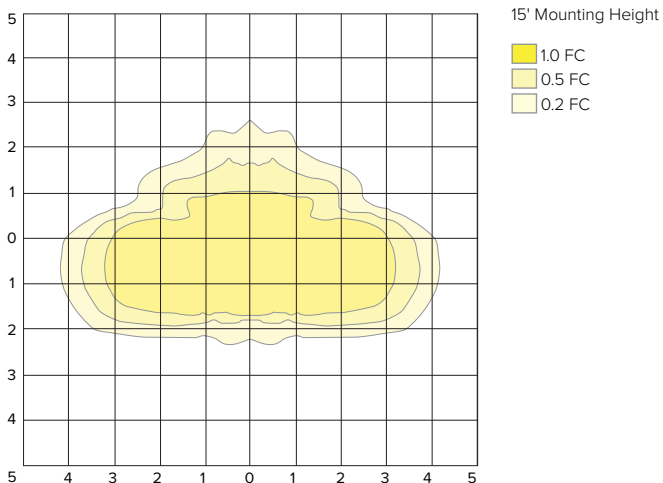

ETK2

LED UPGRADE KIT

PHOTOMETRY

ET2-54L-750-4K7-2-BC


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	7182
Watts	126.27
Efficacy	56.9
IES Type	2
BUG Rating	B0-U0-G1
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	7019	97.7%
Downward House Side	163	2.3%
Downward Total	7182	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	7182	100%

ISOFOOT CANDLE PLOT

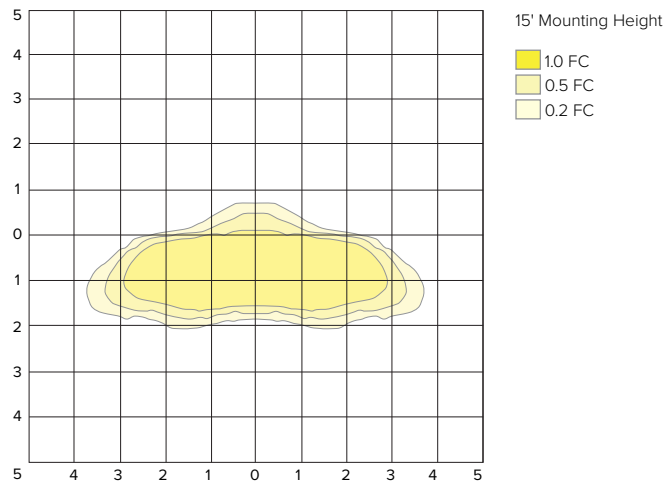

ET2-54L-750-4K7-3


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	13406
Watts	126.27
Efficacy	106.2
IES Type	3
BUG Rating	B2-U0-G2
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	11502	85.8%
Downward House Side	1904	14.2%
Downward Total	13406	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	13406	100%

ISOFOOT CANDLE PLOT

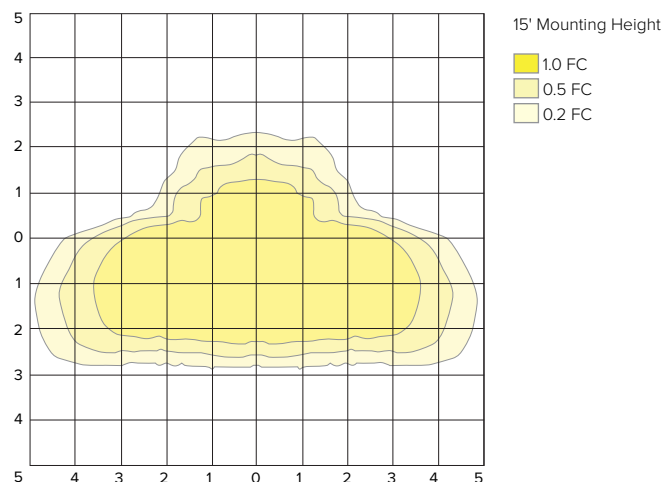

ET2-54L-750-4K7-3-BC


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	7347
Watts	126.27
Efficacy	58.2
IES Type	3
BUG Rating	B0-U0-G2
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	7108	96.7%
Downward House Side	239	3.3%
Downward Total	7347	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	7347	100%

ISOFOOT CANDLE PLOT

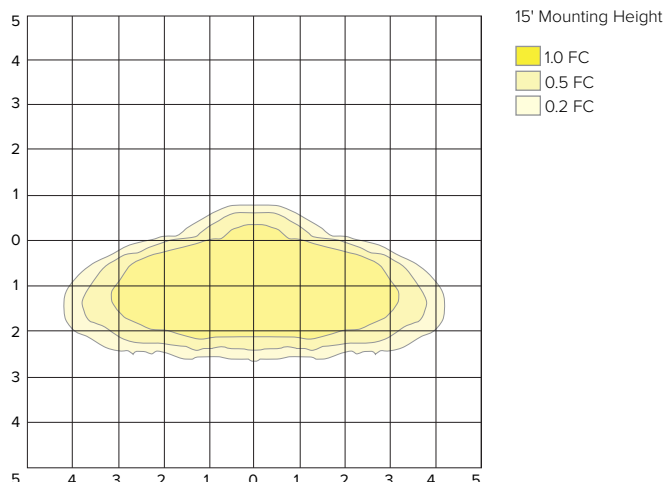

ETK2

LED UPGRADE KIT

PHOTOMETRY

ET2-54L-750-4K7-4


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	13950
Watts	126.27
Efficacy	110.5
IES Type	4
BUG Rating	B1-U0-G3
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	12630	87.6%
Downward House Side	1321	12.4%
Downward Total	13951	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	13951	100%

ISOFOOT CANDLE PLOT

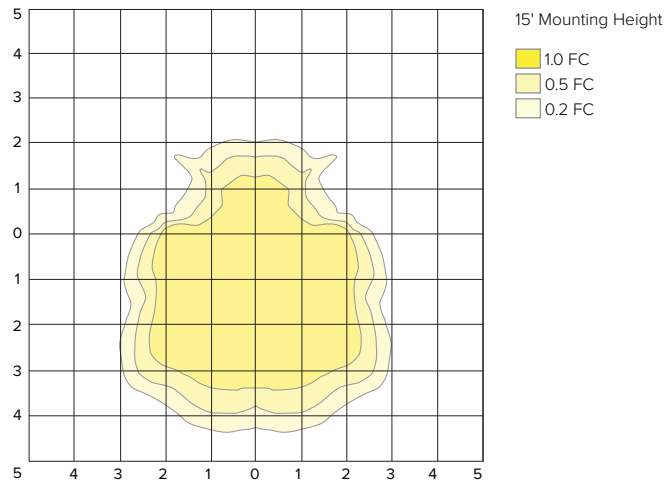

ET2-54L-750-4K7-4-BC


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	9542
Watts	126.27
Efficacy	75.6
IES Type	4
BUG Rating	B0-U0-G2
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	9312	87.6%
Downward House Side	231	12.4%
Downward Total	9543	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	9543	100%

ISOFOOT CANDLE PLOT

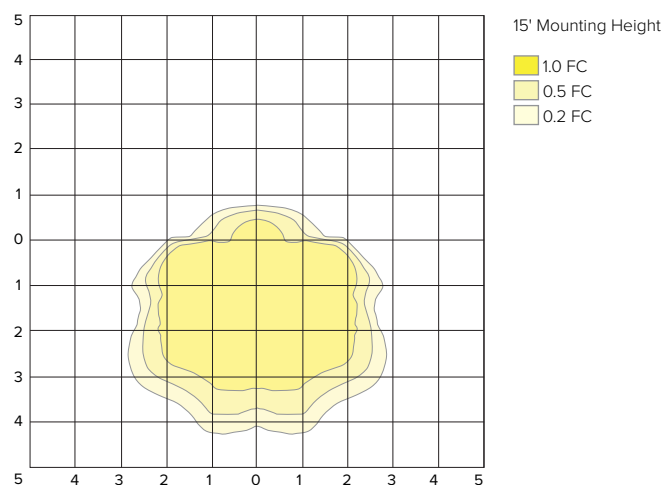

ET2-54L-750-4K7-4W


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	12926
Watts	126.27
Efficacy	102.4
IES Type	4W
BUG Rating	B2-U0-G3
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	11324	87.6%
Downward House Side	1602	12.4%
Downward Total	12926	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	12926	100%

ISOFOOT CANDLE PLOT

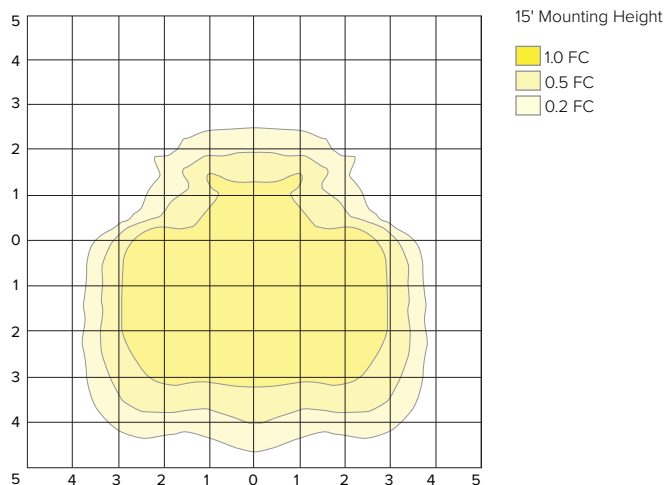

ETK2

LED UPGRADE KIT

PHOTOMETRY

ET2-54L-750-4K7-4W-BC


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	7750
Watts	126.27
Efficacy	61.4
IES Type	4W
BUG Rating	B0-U0-G2
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	7449	96.0%
Downward House Side	301	4.0%
Downward Total	7750	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	7750	100%

ISOFOOT CANDLE PLOT

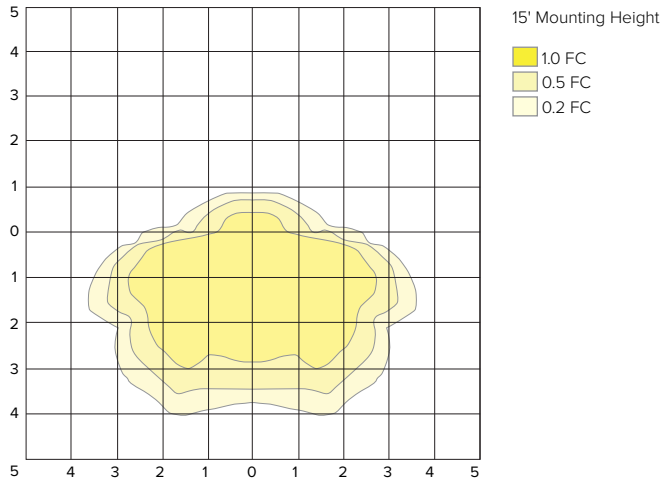

ET2-54L-750-4K7-5QM


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	13885
Watts	126.27
Efficacy	110.0
IES Type	5
BUG Rating	B3-U0-G1
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	6943	50.0%
Downward House Side	6942	50.0%
Downward Total	13885	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	13885	100%

ISOFOOT CANDLE PLOT

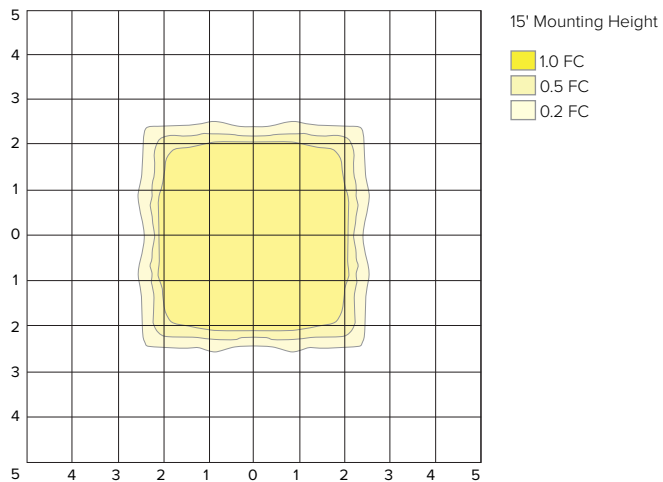

ET2-54L-750-4K7-5W


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	12946
Watts	126.27
Efficacy	102.5
IES Type	5
BUG Rating	B4-U0-G2
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	6473	50.0%
Downward House Side	6473	50.0%
Downward Total	12946	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	12946	100%

ISOFOOT CANDLE PLOT

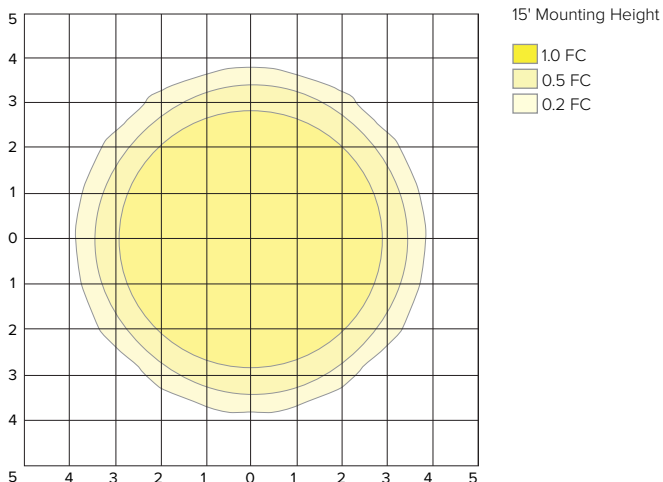

ETK2

LED UPGRADE KIT

PHOTOMETRY

ET2-54L-750-4K7-R


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	13570
Watts	126.27
Efficacy	107.5
IES Type	R
BUG Rating	B2-U0-G2
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	11231	82.8%
Downward House Side	2339	17.2%
Downward Total	13570	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	13570	100%

ISOFOOT CANDLE PLOT

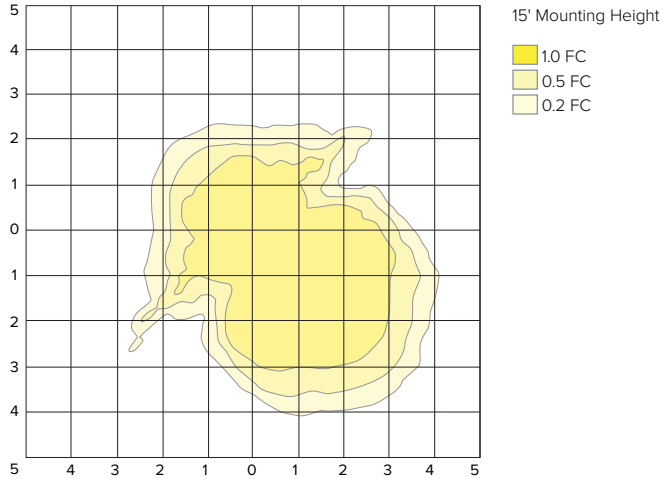

ET2-54L-750-4K7-L


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	13571
Watts	126.27
Efficacy	107.5
IES Type	L
BUG Rating	B2-U0-G2
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	11523	84.9%
Downward House Side	2048	15.1%
Downward Total	13571	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	13571	100%

ISOFOOT CANDLE PLOT

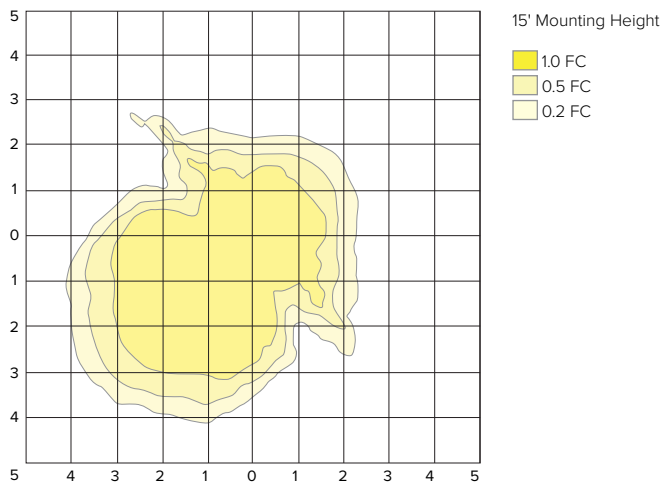


ETK2

LED UPGRADE KIT

TM-30 DATA

COLOR VECTOR GRAPHIC

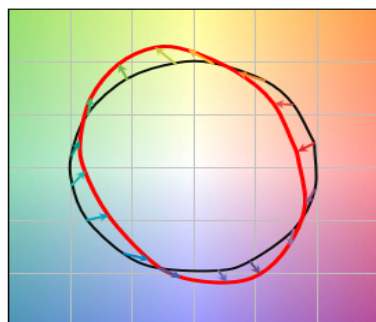


— Reference Illuminant — Test Source


TEST SOURCE

R _f	68
R _a	99
CCT(K)	3947
D _{uv}	0.0004
x	0.3831
y	0.3793
CIE R _a	72

SPECTRAL POWER DISTRIBUTION COMPARISON

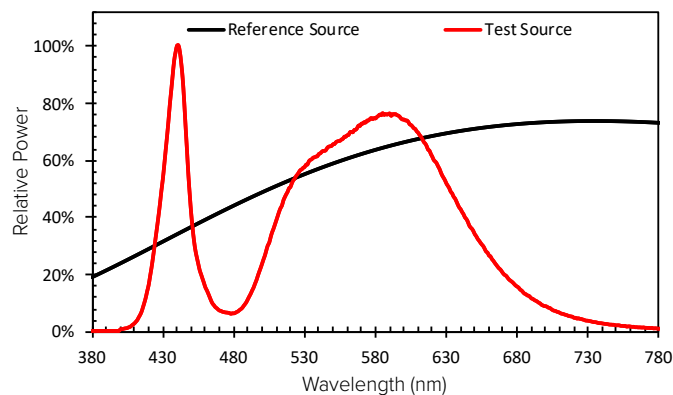

AMBER SPECTRAL POWER DISTRIBUTION

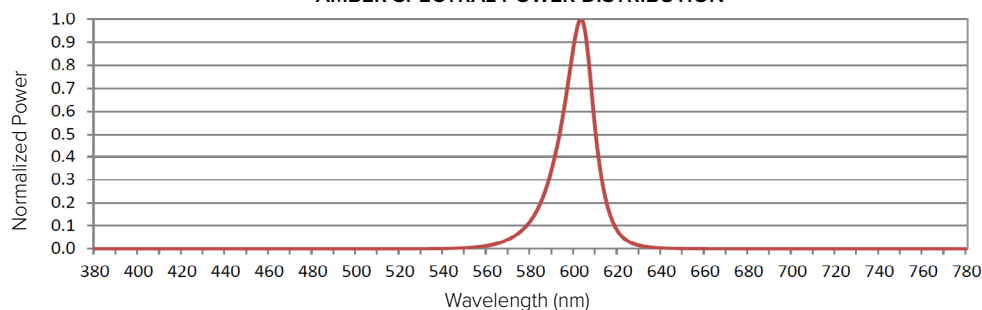

ELECTRICAL DATA

LED Count	System Watts	Current	Line Voltage		Amps AC						Min Power Factor	Max. THD (%)	Dimming				
			VAC	Hz	120	208	240	277	347	480			Dimming Range	Source Current Out		Absolute Voltage	
														Min	Max	Min	Max
54 LEDs	88.7	560 mA	120-480	50/60	0.74	0.43	0.37	0.32	0.26	0.18	>0.9	20	10% to 100%	0mA	1mA	0V	10V
	126.3	750 mA			1.05	0.61	0.53	0.46	0.36	0.26							
81 LEDs	178.2	700 mA			1.49	0.86	0.74	0.64	0.51	0.37							

TM-21 Lifetime Calculation - Projected Lumen Maintenance (25°C / 77°C)						
Ambient Temp.	0	25,000	36,000	50,000	100,000	Reported L70
25°C / 77°F	100%	94.22%	92.26%	89.84%	81.68%	>60khrs

CRI Lumen Multiplier for 80 and 90 CRI		
CCT	80 CRI	90 CRI
2700K	0.859	0.655
3000K	0.9119	.7033
3500K	0.906	0.732
4000K	0.8941	.734
5000K	0.879	.7712
Scaling factor of 5000K 70CRI lumen packages		