


FEATURES

- Architectural linear product for wall and ground mounting applications such as sign lighting, wall washing, wall grazing, and building accent lighting
- Linear run capabilities for even, uniform light distribution with no scalloping effect
- Lumen range from 657 to 3,271 lm
- UL/cUL listed for wet locations, IP66 and 3G vibration rated



CONTROL TECHNOLOGY



SPECIFICATIONS

CONSTRUCTION

- Extruded housing, low copper (<0.1% Cu) Aluminum Alloy 6063-T6 and .160" minimum wall thickness.
- Extrusion includes an integral visor.
- Die-cast driver compartment and end caps, low copper (<0.6% Cu) Aluminum Alloy 360 and .100" minimum wall thickness.
- Finish: fade and abrasion resistant, electro statically applied, thermally cured, triglyceride isocyanurate (TGIC) polyester powder coat.
- Lens is impact resistant 0.157" tempered glass with anti-reflective coating
- Lens is sealed in with Reactive Back Bedding Sealant.
- Driver compartment has a one-piece molded silicone gasket.
- All external fasteners are stainless steel

OPTICS

- LEDs mount to a metal printed circuit board assembly (MCPCB).
- Optical lenses are clear injection molded PMMA acrylic that allow for good color mixing.

INSTALLATION

- Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.

ELECTRICAL

- Universal voltage, 120 through 277V with a $\pm 10\%$ tolerance. Driver is Underwriters Laboratories listed.
- High voltage configurations, 347/480.
- Drivers have greater than a 0.9 power factor, less than 20% harmonic distortion, and be suitable for operation in -20°C to 50°C ambient environments.
- Standard configuration has dimming leads pulled off the fixture.
- Luminaire capable of operating at 100% brightness in a 40°C environment.
- Surge protection: 20,000A in series and 10,000kA in parallel
- SF for 120, 277, 347 Line Volts, DF for 208, 240, 480 Line Volts.
- Wiring: No. 18AWM rated 150°C.
- External cable connections are IP68 rated.

intent



Intent

RELATED PRODUCTS

KFL LTV8 (RGBW) INT (STATIC WHITE)

CONFIGURATION	WEIGHT	CONFIGURATION	WEIGHT
INT-2-RGBW/RGBA-K	16 lbs / 7.25 kg	INT-2-RGBW/RGBA-A6	32 lbs / 14.51 kg
INT-3-RGBW/RGBA-K	20 lbs / 9.07 kg	INT-3-RGBW/RGBA-A6	34 lbs / 15.42 kg
INT-4-RGBW/RGBA-K	23 lbs / 10.43 kg	INT-4-RGBW/RGBA-A6	37 lbs / 16.78 kg
INT-2-RGBW/RGBA-A3	24 lbs / 10.88 kg	INT-2-RGBW/RGBA-A12	34 lbs / 15.42 kg
INT-3-RGBW/RGBA-A3	25 lbs / 11.33 kg	INT-3-RGBW/RGBA-A12	36 lbs / 16.32 kg
INT-4-RGBW/RGBA-A3	27 lbs / 12.24 kg	INT-4-RGBW/RGBA-A12	38 lbs / 17.23 kg

CONTROL

- Each fixture comes equipment with a dual control driver that supports Bluetooth® operation of individual fixtures or DMX control of an entire system of fixtures.

Bluetooth®:

- Free Bluetooth® Apps are available for Apple iOS and Google Android mobile devices and are downloadable via the Internet at Apple App Store or Google Play.
- Modular wiring harness in the service area provides user access to the dimming circuitry via DMX.



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth® SIG, Inc. and any use of such marks by Kim Lighting is under license. Other trademarks and trade names are those of their respective owners. Apple, the Apple logo, iPad, iPhone, and iPod Touch are trademarks of Apple Inc., Registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Google Play is a trademark of Google Inc.



Continued on page 3

KEY DATA	
LUMEN RANGE	657-3,271
WATTAGE RANGE	16.4-40.5
EFFICACY RANGE (LPW)	37.1-85
REPORTED LIFE (HOURS)	L70/60,000

DATE:

LOCATION:

TYPE:

PROJECT:

CATALOG #:

ORDERING GUIDE

Example: INT-2-12L-15-RGBW-NS-UNV-A3-CR-MB-GTT-MGF-PC-SF-CK23

CATALOG #

HOUSING

INTENT													
Housing		Length		#L-Nom. Watts		CCT/CRI		Beam Spread		Voltage		Mounting	
INT	Flood Luminaire	2	2 Foot	12L-15	15W	RGBW	RGBW-6500K	NS	Narrow Spot	UNV	Universal 120–277V	K	Threaded Knuckle
		3	3 Foot	18L-35	35W	RGBA ⁶	RGBA-590nm	SP	Spot	347	347V	A3 ⁵	3" Adjustable arm
		4	4 Foot	24L-40	40W			N	Narrow	480	480V	A6 ⁵	6" Adjustable arm
								NM	Narrow Medium			A12	12" Adjustable arm
								M	Medium				
								MF	Medium Flood				
								WG	Wall Graze				

Cable Ready		Input Wiring		Color		Options	
CR	Cable Ready	LM	Left Mounting (Default)	BLS	Black Gloss Smooth	LGT	Light Grey Matte
NCR	Non Cable Ready	RM	Right Mounting	BLT	Black Matte Textured	PSS	Platinum Silver Gloss Smooth
		MB ¹	Mounting Bracket	DBS	Dark Bronze Gloss Smooth	VGT	Verde Green Matte Textured
				DBT	Dark Bronze Matte Textured	WHS	White Gloss Smooth
				GTT	Graphite Matte Textured	WHT	White Matte Textured
				LGS	Light Grey Gloss Smooth	Color Option	
						CC ²	Custom Color

Mounting Accessories							
Mounting Accessories				Accessory Colors			
J-25N ³	Stake	INTKIT/ INT-C2FT	2ft Connector Cable	BLS	Black Gloss Smooth	LGT	Light Grey Matte
JB1 ³	Architectural Junction Box	INTKIT/ INT-C3FT	3ft Connector Cable	BLT	Black Matte Textured		Textured
JBR ³	Composite In-grade Architectural Junction Box	INTKIT/ INT-C4FT	4ft Connector Cable			PSS	Platinum Silver Gloss Smooth
		INTKIT/ INT-C5FT	5ft Connector Cable	DBS	Dark Bronze Gloss Smooth		
SM18 ³	Stanchion Mount	INTKIT/ INT-C10FT	10ft Connector Cable			VGT	Verde Green Matte Textured
INT-WMT-A	Wall Mounting Template	INTKIT/ INT-CK23 ⁴	2ft-3ft Connector Kit	DBT	Dark Bronze Matte Textured	WHS	White Gloss Smooth
		INTKIT/ INT-CK24 ⁴	2ft-4ft Connector Kit			WHT	White Matte Textured
		INTKIT/ INT-CK33 ⁴	3ft-3ft Connector Kit	GTT	Graphite Matte Textured	Color Option	
		INTKIT/ INT-CK34 ⁴	3ft-4ft Connector Kit			CC ²	Custom Color
		INTKIT/ INT-CK44 ⁴	4ft-4ft Connector Kit	LGS	Light Grey Gloss Smooth		

Notes:

1 2ft Intent with adjustable arm input wiring only

2 Consult factory for custom color, marine and corrosive finish options

3 Order in set of 2 per fixture

4 Connector Kit will have Decorative Cover Included. Color is needed for the decorative cover

5 3G rated

6 Not turtle friendly

7 Not available in 480V

INT RGBW

FLOODLIGHT LUMINAIRE

SPECIFICATIONS CONT'D

CONTROLS (CON'T)

- Each fixture comes equipment with a dual control driver that supports Bluetooth® operation of individual fixtures or DMX control of an entire system of fixtures.

Bluetooth®:

- Free Bluetooth® Apps are available for Apple iOS and Google Android mobile devices and are downloadable via the internet at Apple App Store or Google Play.
- Modular wiring harness in the service area provides user access to the dimming circuitry via DMX.

DMX:

- Fully DMX/RDM Compatible
- Utilizes 4 DMX Channels per fixture

DMX Map

- Start Address – Red
- Start Address +1 – Green
- Start Address +2 – Blue
- Start Address +3 – White

DMX Addressing is performed by using a compatible RDM handheld unit or via the Bluetooth® App.

- Performed by using a compatible RDM handheld unit or via the Bluetooth® App



DMX Wiring Color Code

- Red Wire – DMX +
- Brown Wire – DMX-
- Yellow Wire – Shield/Ground
- DMX termination must be achieved by adding a DMX terminator to the last fixture in a Daisy-Chain. Fixture does not auto terminate.
- Kim Lighting is proud to offer the Pharos Architectural Controls DMX Controllers and Touch screens. See Pharos Spec Sheet for more details.
- See the Pharos® Spec Sheet for more details.

Mobile App:

- Mobile App specification in additional information section.
- Mobile App. dimming range from 0% to 100% RGBW app (available on IOS and Android).
- Color selection and adjustment.
- Camera function for color matching.
- Intensity slider for dimming/ramping up.
- Save and rename up to 10 presets.
- Group and rename fixtures.
- Fixture is password protected, refer to instructions to set unique password.

CERTIFICATIONS AND LISTINGS.

- Listed to UL1598 and CSA C22.2#250.0-24 for wet locations and 40°C ambient temperatures.
- IP66 certified.
- RoHS compliant.
- ANSI C136.31-2010 Vibration tested and compliant 3G
- IEC 66262 Mechanical Impact Code IK07 three and four foot fixture
- IEC 66262 Mechanical Impact Code IK08 two foot fixture

WARRANTY

- 5 year warranty

DELIVERED LUMENS

Section Length	LED Count	Drive Current (mA)	Nominal Lumen Package	Nominal Watts	Beam Spread		Beam Angles (H x V)	NEMA Type	RGBA 590nm			RGBW 6500K		
									Lumens	Max Candela	LPW	Lumens	Max Candela	LPW
2 FT	12L	700	1,000	15	NS	Narrow Spot	7.5° H x 7.5°V	1 H x 1 V	741	33230	45.1	1338	60002	81.2
					SP	Spot	11°H x 11°V	2 H x 2 V	757	16303	46.0	1366	29419	82.9
					N	Narrow	15°H x 15°V	3 H x 3 V	725	6197	44.1	1308	11180	79.3
					NM	Narrow Medium	23°H x 23°V	4 H x 4 V	657	2762	39.9	1185	4981	71.9
					M	Medium	33°H x 33°V	4 H x 4V	670	1791	41.9	1209	2993	73.4
					MF	Medium Flood	54 °H x 54°V	5 H x 5 V	719	864	43.7	1298	1560	78.6
					WG	Wall Graze	33 °H x 8°V	3 H x 1 V	730	7859	44.4	1318	14189	79.1
3 FT	18L	1650	2,000	35	NS	Narrow Spot	7.5° H x 7.5°V	1 H x 1 V	1778	79734	46.2	3209	143906	83.4
					SP	Spot	11°H x 11°V	2 H x 2 V	1813	39046	47.1	3271	70446	85.0
					N	Narrow	15°H x 15°V	3 H x 3 V	1733	14813	45.0	3128	26736	81.2
					NM	Narrow Medium	23°H x 23°V	4 H x 4 V	1570	6599	40.8	2834	11912	73.6
					M	Medium	33°H x 33°V	4 H x 4V	1602	3150	41.6	2891	5684	75.1
					MF	Medium Flood	54 °H x 54°V	5 H x 5 V	1721	2068	44.7	3106	3733	80.7
					WG	Wall Graze	33 °H x 8°V	3 H x 1 V	1773	19087	46.1	3199	34439	83.1
4 FT	24L	1800	2,500	40	NS	Narrow Spot	7.5° H x 7.5°V	1 H x 1 V	1752	78548	42.9	3161	141785	77.5
					SP	Spot	11°H x 11°V	2 H x 2 V	1786	38454	43.8	3223	69399	79.0
					N	Narrow	15°H x 15°V	3 H x 3 V	1708	14593	41.9	3081	26338	75.5
					NM	Narrow Medium	23°H x 23°V	4 H x 4 V	1547	6502	37.9	2791	11733	68.4
					M	Medium	33°H x 33°V	4 H x 4V	1578	4184	38.7	2848	7342	69.8
					MF	Medium Flood	54 °H x 54°V	5 H x 5 V	1696	2038	41.6	3060	3678	75.0
					WG	Wall Graze	33 °H x 8°V	3 H x 1 V	1747	18801	42.8	3152	33927	77.3

PHOTOMETRY

INT-4-24L-40-RGBW-NS


LUMINAIRE DATA

Description	6500K
Delivered Lumens	3161
Watts	40.8
Efficacy	77.5
Beam Angls (HxV)	7.4° x 7.8°
Center Beam Candlepower	141785

LUMENS PER ZONE

	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%)	75.20%	2,436.20	14.5	14.3
Beam (50%)	25%	809.1	7.4	7.8
Total	97.60%	3,161.60		

ISOFOOT CANDLE PLOT

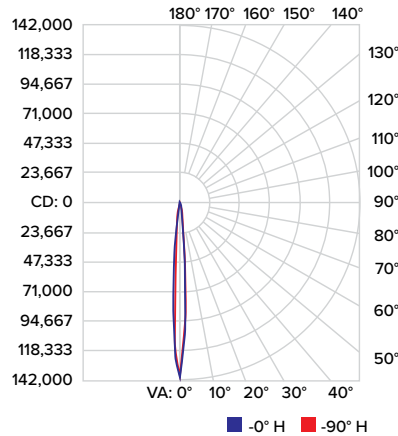

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width
62.7 ft	36.10 fc	8.6 ft 8.1 ft
125.3 ft	9.03 fc	17.1 ft 16.3 ft
188.0 ft	4.01 fc	25.6 ft 24.4 ft
250.7 ft	2.26 fc	34.2 ft 32.5 ft
313.3 ft	1.44 fc	42.7 ft 40.6 ft
376.0 ft	1.00 fc	51.3 ft 48.8 ft

■ Vertical Spread: 7.8° ■ Horizpread: 7.4°

INT-4-24L-40-RGBW-SP


LUMINAIRE DATA

Description	6500K
Delivered Lumens	3223
Watts	40.8
Efficacy	79.0
Beam Angls (HxV)	11° x 11.1°
Center Beam Candlepower	69399

LUMENS PER ZONE

	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%)	79.10%	2,580.50	21	21.6
Beam (50%)	43.50%	1,418.90	11	11.1
Total	98.80%	3,222.80		

ISOFOOT CANDLE PLOT

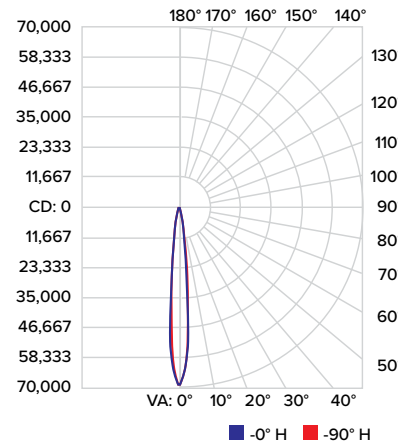

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width
43.8 ft	36.20 fc	8.5 ft 8.4 ft
87.7 ft	9.02 fc	17.1 ft 16.8 ft
131.5 ft	4.01 fc	25.6 ft 25.2 ft
175.3 ft	2.26 fc	34.1 ft 33.7 ft
219.2 ft	1.44 fc	42.7 ft 42.1 ft
263.0 ft	1.00 fc	51.2 ft 50.5 ft

■ Vertical Spread: 11.1° ■ Horizpread: 11.0°

PHOTOMETRY CONTINUED

INT-4-24L-40-RGBW-N


LUMINAIRE DATA

Description	6500K
Delivered Lumens	3081
Watts	40.8
Efficacy	75.5
Beam Angls (HxV)	15.2° x 15.8°
Center Beam Candlepower	26338

LUMENS PER ZONE

	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%)	72.90%	2,256.80	33.1	32.9
Beam (50%)	33.70%	1,044.20	15.2	15.8
Total	99.50%	3,081.90		

ISOFOOT CANDLE PLOT

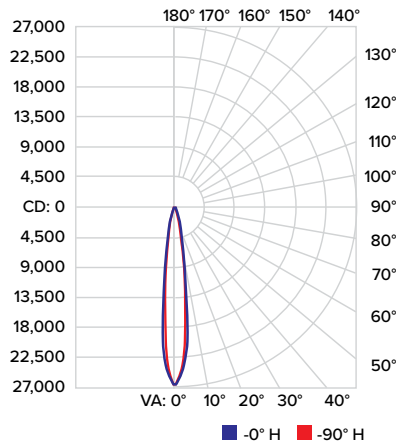

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width
27.0 ft	36.10 fc	7.5 ft 7.2 ft
54.0 ft	9.03 fc	15.0 ft 14.4 ft
81.0 ft	4.01 fc	22.5 ft 21.6 ft
108.0 ft	2.26 fc	30.0 ft 28.7 ft
135.0 ft	1.45 fc	37.5 ft 35.9 ft
162.0 ft	1.00 fc	45.0 ft 43.1 ft

■ Vertical Spread: 15.8° ■ Horizpread: 15.2°

INT-4-24L-40-RGBW-NM


LUMINAIRE DATA

Description	6500K
Delivered Lumens	2791
Watts	40.8
Efficacy	68.4
Beam Angls (HxV)	22.5° x 22.5°
Center Beam Candlepower	11733

LUMENS PER ZONE

	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%)	73.70%	2,062.60	47.3	46.7
Beam (50%)	35.10%	981.00	22.5	22.5
Total	99.80%	2,791.20		

ISOFOOT CANDLE PLOT

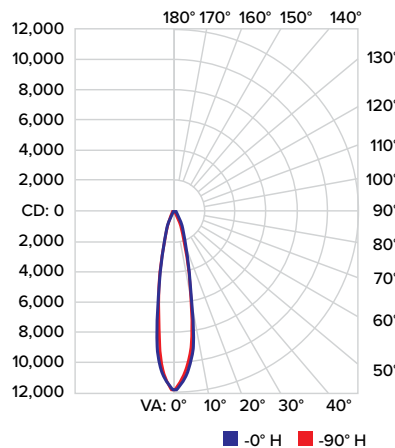

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width
18.0 ft	36.20 fc	7.2 ft 7.2 ft
36.0 ft	9.05 fc	14.3 ft 14.3 ft
54.0 ft	4.02 fc	21.5 ft 21.5 ft
72.0 ft	2.26 fc	28.7 ft 28.7 ft
90.0 ft	1.45 fc	35.8 ft 35.9 ft
108.0 ft	1.01 fc	43.0 ft 43.0 ft

■ Vertical Spread: 22.5° ■ Horizpread: 22.5°

INT RGBW

FLOODLIGHT LUMINAIRE

PHOTOMETRY CONTINUED

INT-4-24L-40-RGBW-M


LUMINAIRE DATA

Description	6500K
Delivered Lumens	2848
Watts	40.8
Efficacy	69.8
Beam Angls (HxV)	33.4° x 33.5°
Center Beam Candlepower	7342

LUMENS PER ZONE

	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%)	85.20%	2,429.60	57.8	57.8
Beam (50%)	53.30%	1,521.40	33.9	34.1
Total	99.90%	2,848.30		

ISOFOOT CANDLE PLOT

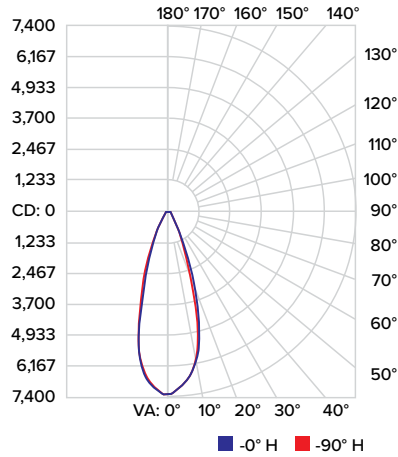

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width
14.3 ft	35.70 fc	8.8 ft 8.7 ft
28.7 ft	8.87 fc	17.6 ft 17.5 ft
43.0 ft	3.95 fc	26.4 ft 26.2 ft
57.3 ft	2.23 fc	35.2 ft 35.0 ft
71.7 ft	1.42 fc	44.0 ft 43.7 ft
86.0 ft	0.99 fc	52.8 ft 52.5 ft

■ Vertical Spread: 34.1° ■ Horizpread: 33.9°

INT-4-24L-40-RGBW-MF


LUMINAIRE DATA

Description	6500K
Delivered Lumens	3060
Watts	40.8
Efficacy	75.0
Beam Angls (HxV)	53.6° x 54.6°
Center Beam Candlepower	3678

LUMENS PER ZONE

	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%)	91.50%	2,801.40	80.4	81.1
Beam (50%)	67.80%	2,077.00	53.6	54.6
Total	99.90%	3,060.60		

ISOFOOT CANDLE PLOT

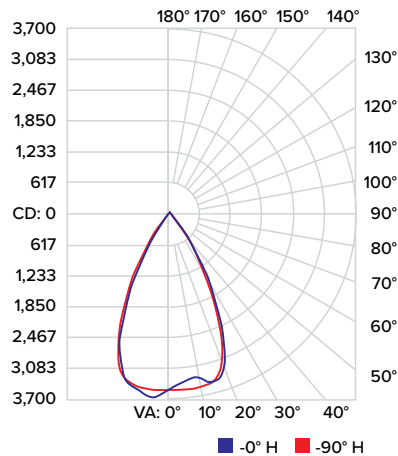

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width
9.7 ft	37.10 fc	10.0 ft 9.8 ft
19.3 ft	9.36 fc	19.9 ft 19.5 ft
29.0 ft	4.15 fc	29.9 ft 29.3 ft
38.7 ft	2.33 fc	39.9 ft 39.1 ft
48.3 ft	1.49 fc	49.8 ft 48.8 ft
58.0 ft	1.04 fc	59.8 ft 58.6 ft

■ Vertical Spread: 54.6° ■ Horizpread: 53.6°

INT-4-24L-40-RGBW-WG


LUMINAIRE DATA

Description	6500K
Delivered Lumens	3152
Watts	40.8
Efficacy	77.3
Beam Angls (HxV)	33.1° x 8°
Center Beam Candlepower	33927

LUMENS PER ZONE

	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%)	87.90%	2,790.90	44.1	15.7
Beam (50%)	56.10%	1,780.40	33.1	8
Total	99.30%	3,151.80		

ISOFOOT CANDLE PLOT

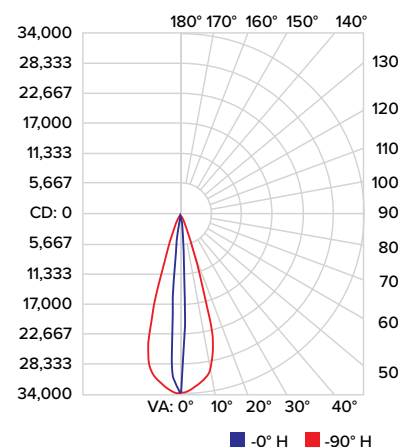

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width
30.7 ft	36.00 fc	4.3 ft 18.2 ft
61.3 ft	9.03 fc	8.6 ft 34.4 ft
92.0 ft	4.01 fc	12.9 ft 54.6 ft
122.7 ft	2.25 fc	17.2 ft 72.9 ft
153.3 ft	1.44 fc	21.5 ft 91.0 ft
184.0 ft	1.00 fc	25.8 ft 109.2 ft

■ Vertical Spread: 8.0° ■ Horizpread: 33.1°

INT RGBW


FLOODLIGHT LUMINAIRE

TM-30 DATA


TEST SOURCE

R _f	65
R _g	96
CCT(K)	6476
D _{uv}	-0.0003
x	0.3140
y	0.3235
CIE R _a	70

COLOR VECTOR GRAPHIC



SPECTRAL POWER DISTRIBUTION COMPARISON

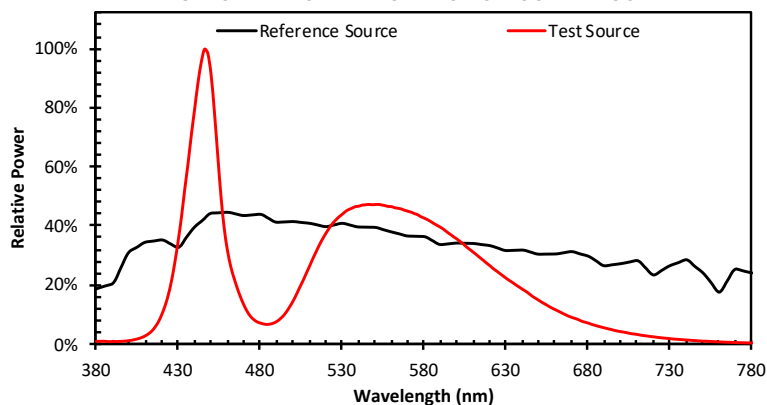

ELECTRICAL DATA



Size	System Watts	Current	Line Voltage		Amps AC						Min Power Factor	Max.THD (%)
			VAC	HZ	120	208	240	277	347	480		
2 ft	16.4	700 mA	120-480	50/60	0.17	0.08	0.07	0.06	0.05	0.03	>0.9	20
3 ft	38.5	1650 mA			0.33	0.19	0.16	0.14	0.11	0.08		
4 ft	40.8	1800 mA			0.35	0.20	0.17	0.15	0.12	0.09		

POWER LOAD MATRIX (10A MAX AMPERAGE)


Verion	Size (ft)	Driver Wattage (W)	Driver Qty	Primary Voltage (V)	Programmed Current (mA)	Power Factor	%ATHD	Load (A)	System Power (W)	Max Mated Units *	Total Feet
RGBW	2	15	1	120	700	0.97	17.53	0.17	16.4	60	120
	3	40	1	120	1650	0.99	10.3	0.33	38.5	30	90
	4	40	1	120	1800	0.99	10.7	0.35	40.5	28	112

* Refer to Installation Instructions on how to mate fixtures with repeaters to maintain data integrity


DIMENSIONS

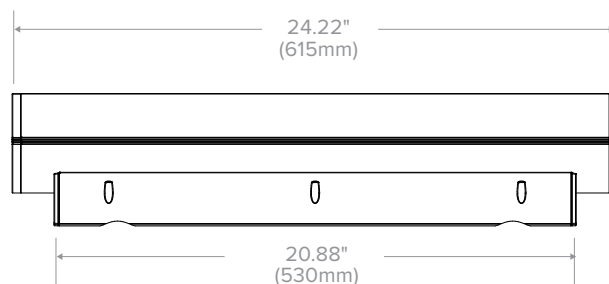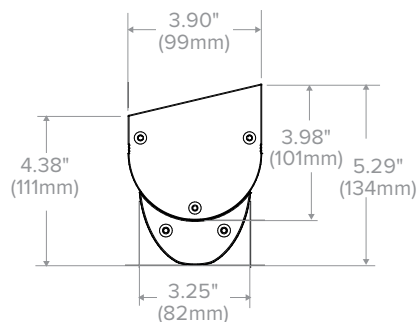

2 FT Fixture

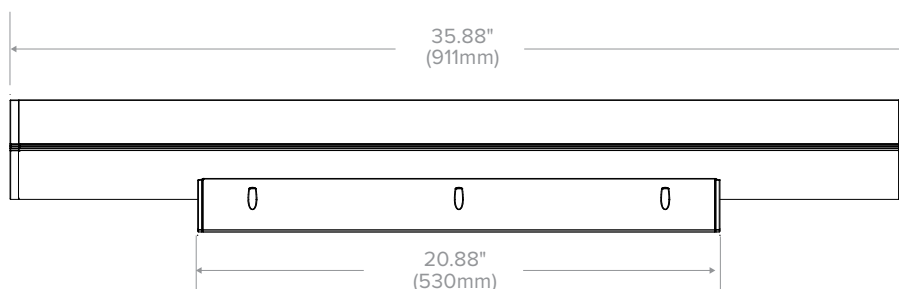

3 FT Fixture

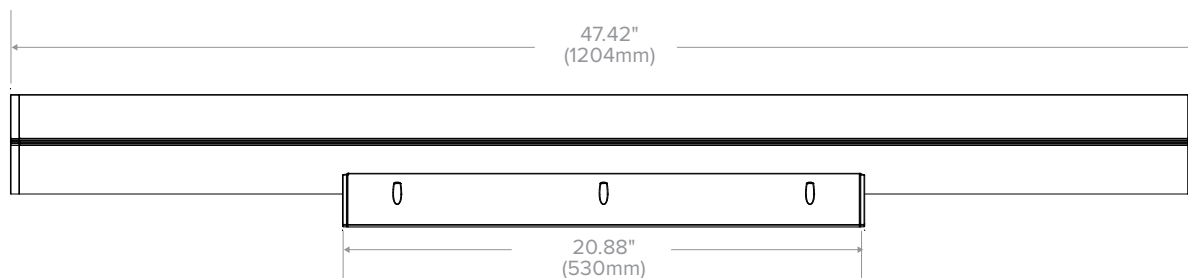


4 FT Fixture

INT RGBW


FLOODLIGHT LUMINAIRE

MOUNTING


- **Cable Ready**
Wiring can be mounted through a cable on the side of the driver compartment. If this option is chosen, fixture will automatically come cable ready on both sides of the fixture.

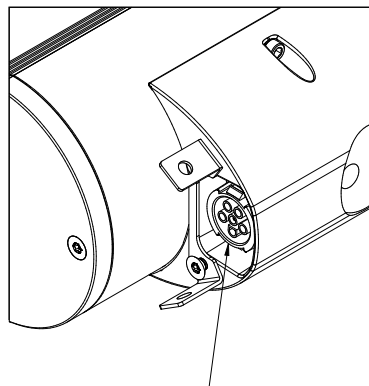

Cable Ready

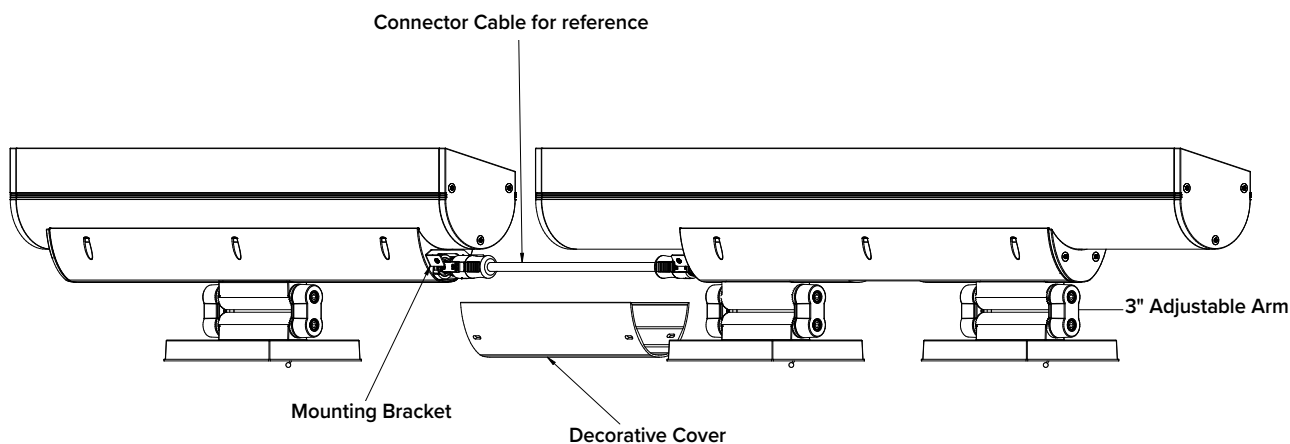




Left Mounting and Cable Ready

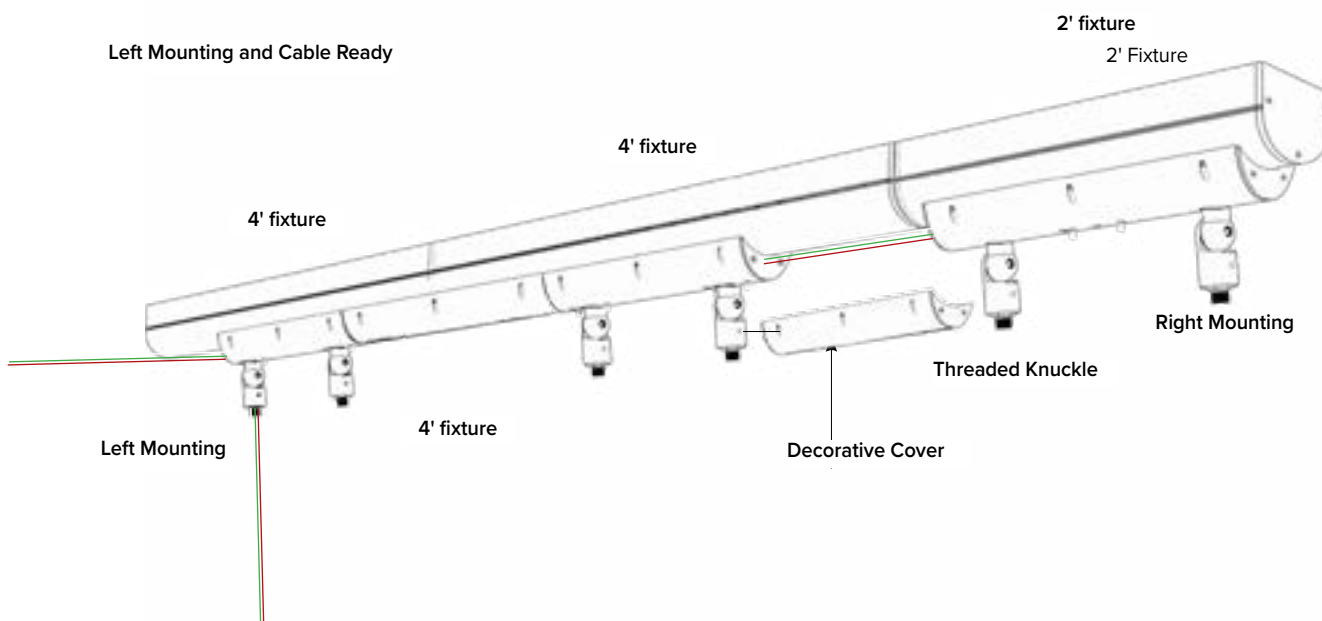

MOUNTING CONT'D




• **Left Mounting and Cable Ready**

Both above wiring configurations can be combined to create to configuration shown here.

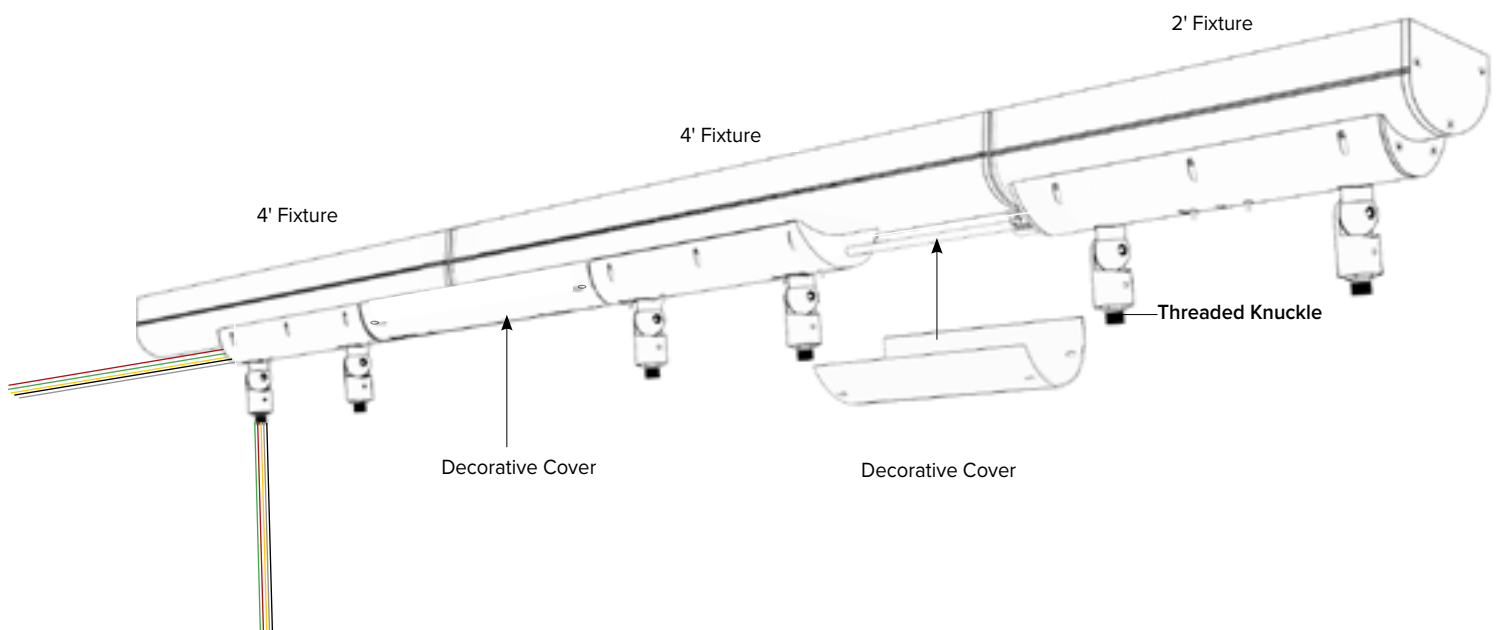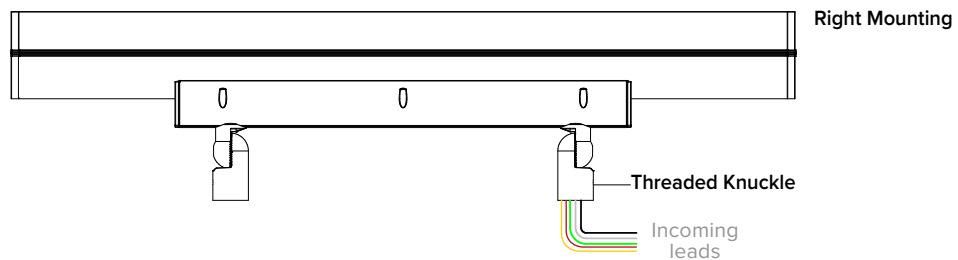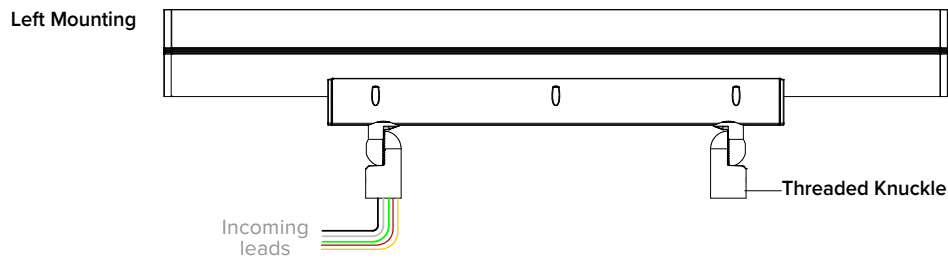

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

MOUNTING CONT'D


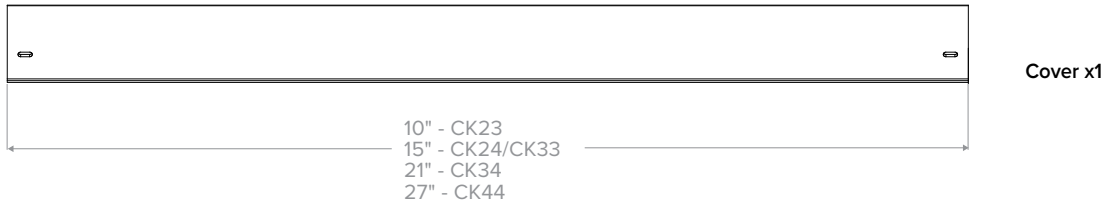
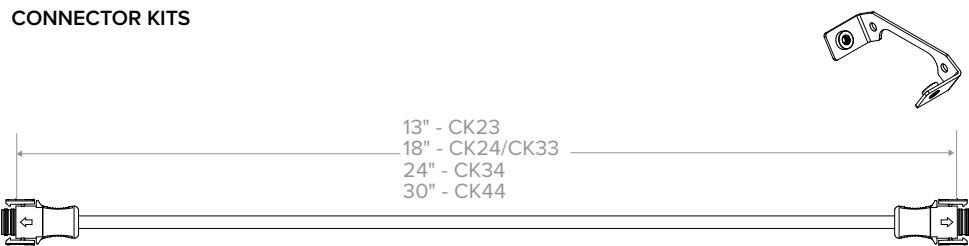
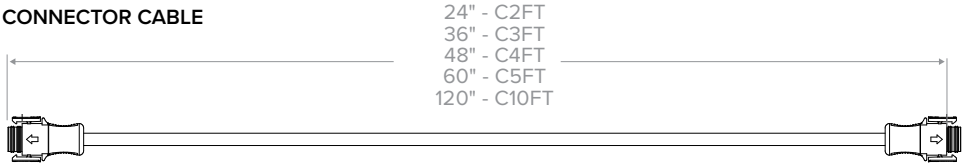


INT RGBW

FLOODLIGHT LUMINAIRE

MOUNTING CONT'D

MOUNTING OPTIONS - 2 FT

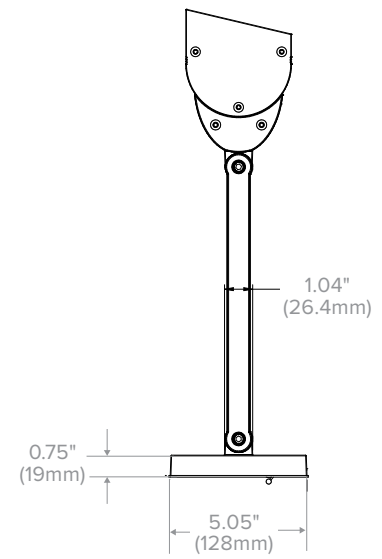
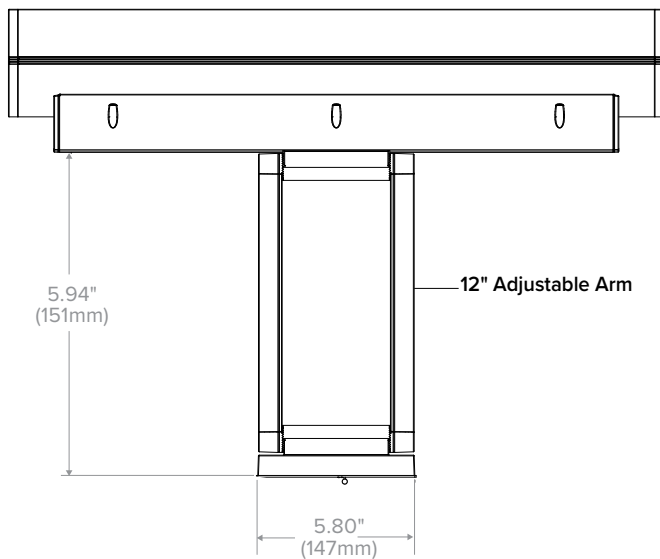
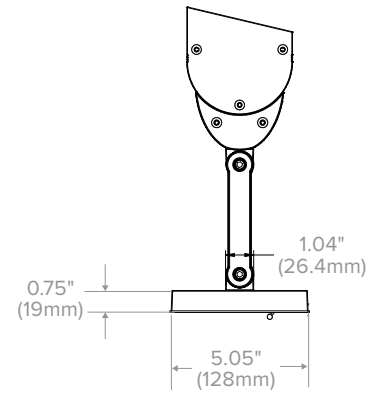
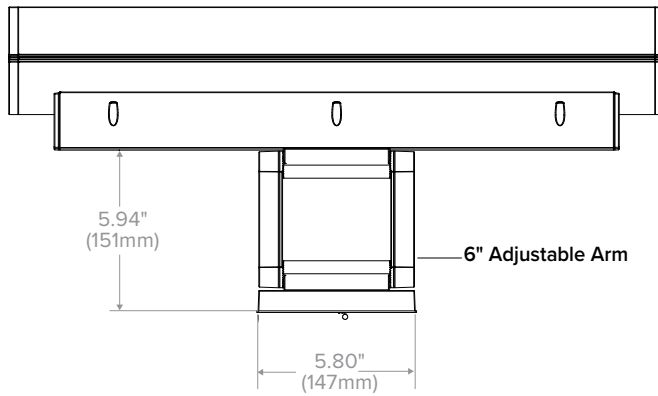


INT RGBW

FLOODLIGHT LUMINAIRE




MOUNTING CONT'D

MOUNTING OPTIONS - 3 FT

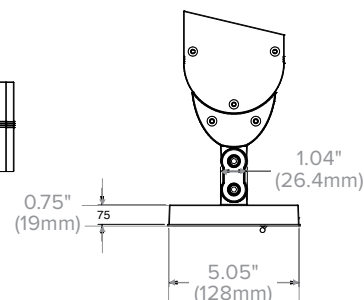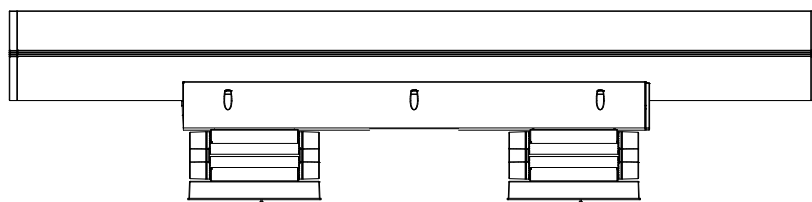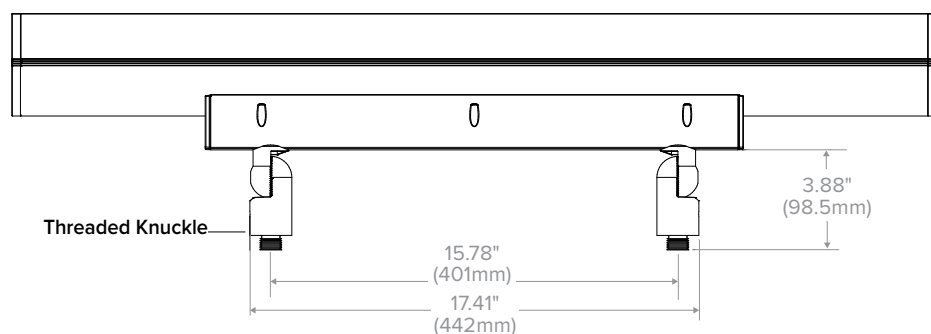








MOUNTING CONT'D

MOUNTING OPTIONS - 4 FT

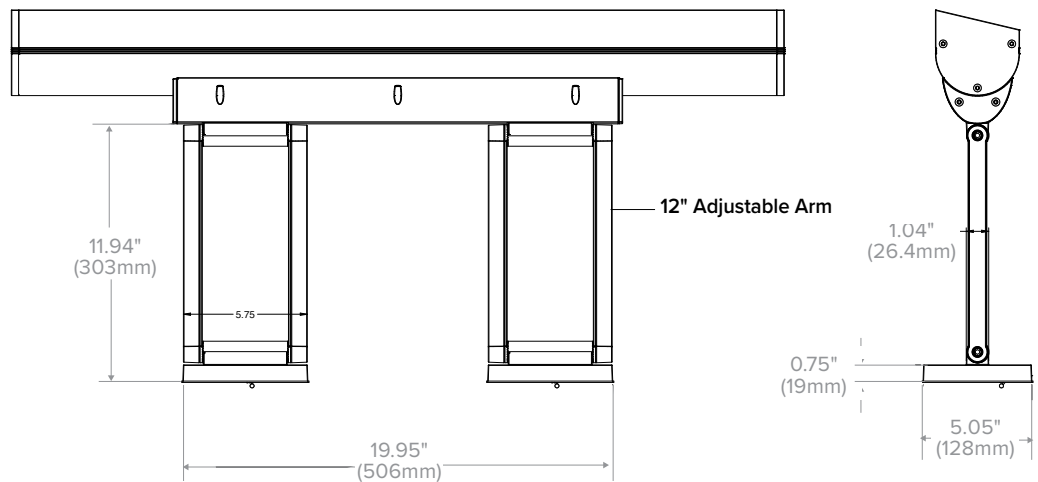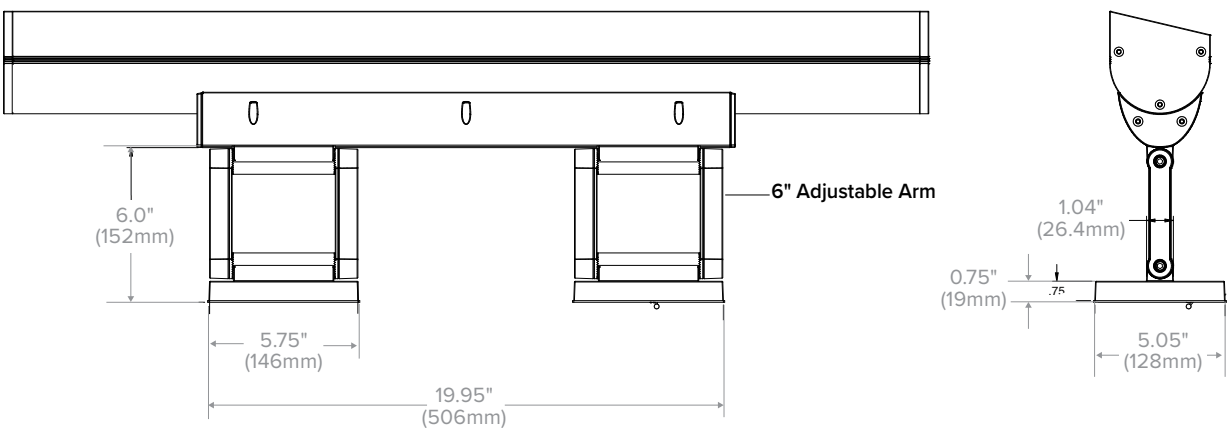
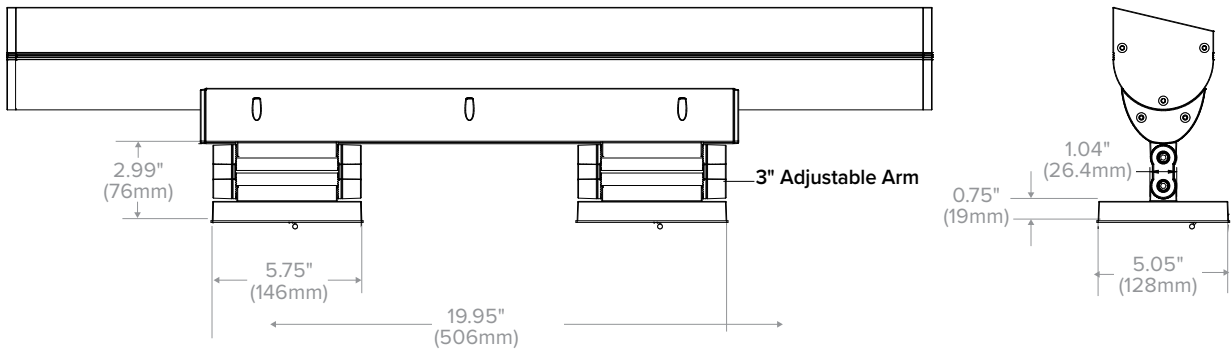


AIMING

BEAM SPREAD

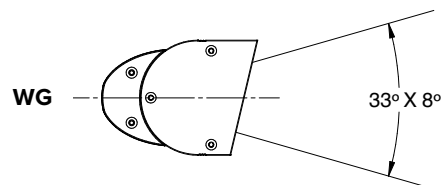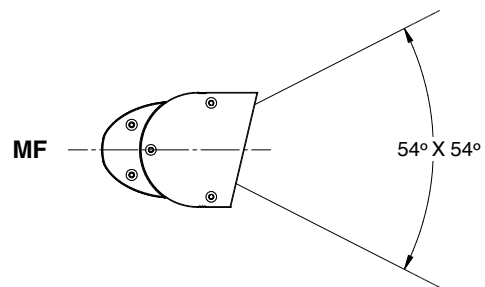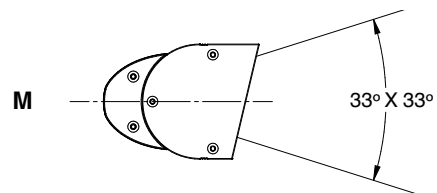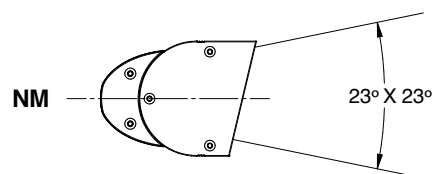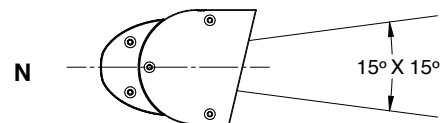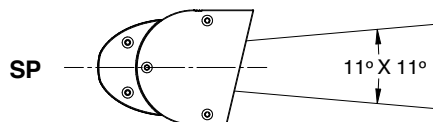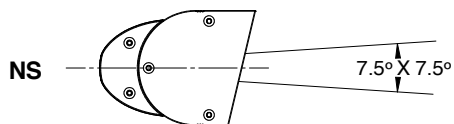



MOUNTING ACCESSORIES

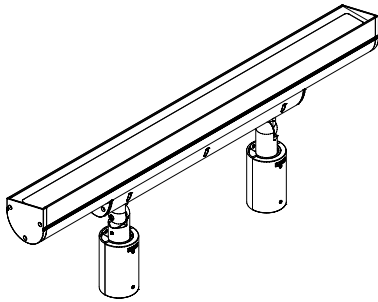

Cat. No. JB1

ARCHITECTURAL JUNCTION BOX



- Die-cast aluminum with 1/2" NPSM fixture mount. Internal set screw provided for locking position. Two 1/2" NPSM in bottom, 17 cu in. internal volume.
- Specify finish: BL - Black, DB - Dark Bronze, GT - Graphite
Example: JB1/GT
- Used with 120V & HID: Micro-Flood, Scarab, Spun Copper Bullet, Sign/Wall Lighter, Ravenna, Bell Stem, Traditional, Traditional Floral, Path Pilot

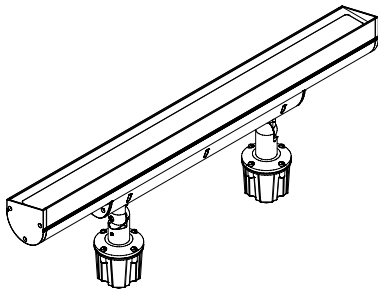

Cat. No. JBR

BRASS IN-GRADE ARCHITECTURAL JUNCTION BOX (THREADED KNUCKLE MOUNT ONLY)



- JBR-2 (2) 1/2" NPT in bottom JBR-3 (2) 3/4" NPT in bottom JBR-21 (2) 1/2" NPT in sides, (2) 1/2" NPT in bottom JBR-24 (4) 1/2" NPT in sides, (4) 1/2" NPT in bottom
- Die-cast brass with 1/2" NPSM fixture mount and die-cast cover. Internal set screw provided for locking position. 21 cu in. internal volume. NOTE: All side taps provided with plugs.
- Creates a flush-mounted appearance.
- May be cast in concrete for increased stability.
- CAUTION: Fixture stem and swivel must not contact soil or standing water. Provide drainage away from junction box.

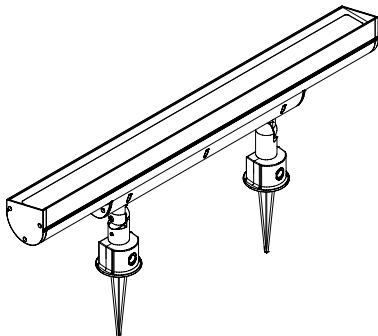

Cat. No. J-25N

PORTABLE SPEAR MOUNT

- Cast iron with 1/2" NPSM fixture mount. Hot dip galvanized finish. 5.5 cu in. splice compartment. (SJTW-A) 3 wire cord and plug. Supplied with (3) wire nuts and (3) mastic seals for waterproofing connections. 9' cord length
- Used with 120V: Micro-Flood, Scarab, Spun Copper Bullet, Sign/Wall Lighter, Ravenna, Bell Stem, Traditional, Traditional Floral, Path Pilot4L

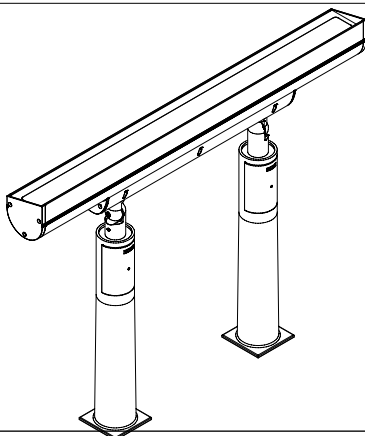

Cat. No. SM18

STANCHION MOUNT (THREADED KNUCKLE MOUNT ONLY)

- 3" O.D. by .188" wall cast low copper (<0.6% Cu) aluminum with 1/2" NPSM fixture mount and hand hole with flush cover. Internal set screw fixture lock accessible through hand hole. Internal ground lug supplied with installed lead.
- CAUTION: To assure a rigid installation, stanchion must be set in concrete (by others).