

KLV10 / KLV12 Traditional Floral

12 VOLT COPPER / BRONZE, A-19 INCANDESCENT

Type: Job: Fixture Catalog number:	Mounting Options:	Approvals:
<hr/> Fixture and Finish	<hr/> Ordered Separately from Fixture See page 2	

Specifications

Hood: Spun copper.

Husk: Cast bronze.

Stem: 1/8" schedule 40 red brass pipe with 1/2" NPT stainless steel bushing at bottom for mounting.

Socket: Porcelain medium base with silicone lamp gasket.

Wiring: 3' No. 18-2 12 Volt cable with fork connectors.

Finish: (KLV10) Acid etched verde green patina.
(KLV12) Natural copper.


Certification: UL Listed to U.S. and Canadian safety standards for wet locations.

ORDERING INFORMATION

Fixture*	Finish
<input type="checkbox"/> KLV10	Verde Patina
<input type="checkbox"/> KLV12	Natural

Wattage / Lamp
25W - 50W
A-19 (12 Volt)
Incandescent
(25W lamp included)

*Remote transformer required.

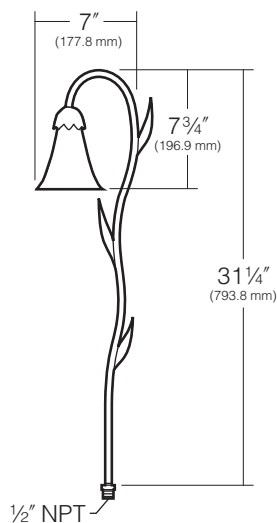

KLV10 / KLV12 Traditional Floral

12 VOLT COPPER / BRONZE, A-19 INCANDESCENT



Mounting Options

Ordered Separately from Fixture

Landscape Light Post by Engineered Products Co.

Cat. No.


- ☐ EP17
☐ No Option

PVC fixture molded in black with 1/2" NPT mount is corrosion free and UV resistant. Replaces EMT, conduit connectors and weatherproof boxes. 100% shatter resistant against denting and cracking. Angled bottom to eliminate cable congestion.

17 1/2" post length

NOTE: EP17 should be used with a UL listed fixture and grounding means (i.e., third wire) suitable for use in wet locations.

"X" = required depth of conduit per local codes.

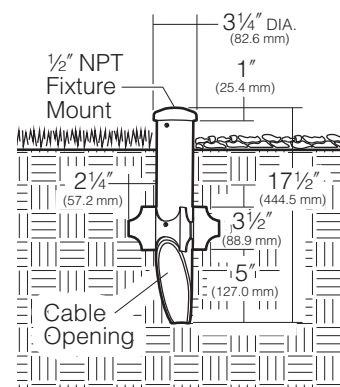

Low Voltage Spear Mount

Cat. No.

Finish

- ☐ KLV400BL Black
☐ KLV400DB Dark Bronze
☐ KLV400GR Verde Green
☐ No Option

Die-cast low copper aluminum with 1/2" NPSM fixture mount. Stainless steel set screw locks fixture into mount. Cable slot allows easy fixture mounting before or after installation in ground. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.

Spear Mounting in Concrete

In addition to soil mounting, the KLV400 can be installed in a concrete footing for added stability and permanence.

