

Mounting Options

EP17/JB1/J-25N/JBR-4/JBR-5/JBR-2/JBR-3/JBR-21/JBR-24/JBR-30

JBR-32/SM18/J-27N/JW/JWBR/KLV400/KLV405/KLV415

Type:

Job:

Mounting Options Catalog number:

Mounting Options and Finish

Approvals:

Mounting Options Ordered Separately from Fixture

Landscape Light Post by Engineered Products Co.


Cat. No.
| EP17
| No Option

PVC fixture molded in black with K" NPT mount is corrosion free and UV resistant. Replaces EMT, conduit connectors and weatherproof boxes. 100% shatter resistant against denting and cracking. Angled bottom to eliminate cable congestion.

17K" post length

NOTE: EP17 should be used with a UL listed fixture and grounding means (i.e., third wire) suitable for use in wet locations.

"x" = required depth of conduit per local codes.

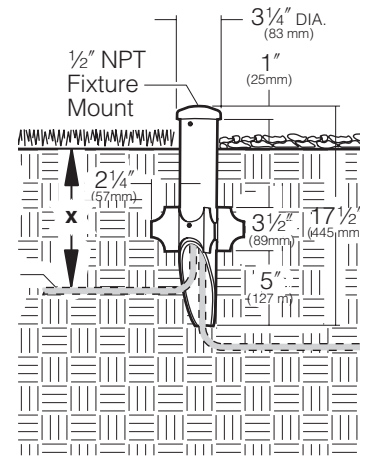

Architectural Junction Box

Cat. No. Finish
| JB1/BL Black
| JB1/DB Dark Bronze
| JB1/GR Verde Green
| No Option


Die-cast aluminum with K" NPSM fixture mount. Internal set screw provided for locking position. Two K" NPSM in bottom, 17 cu in. internal volume. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.

NOTE: May also be used to hard mount low voltage fixtures.

Application Notes

- Elevates Accent Lights above ground cover to prevent foliage from blocking the light.
- Elevates Path Lights above ground cover to achieve a greater light throw.

CAUTION: Junction box must be installed high enough to avoid contact with soil or standing water.




Portable Spear Mount

Cat. No.
| J-25N
| No Option

Cast iron with K" NPSM fixture mount. Hot dip galvanized finish. 5.5 cu in. splice compartment. (SJTW-A) 3 wire cord and plug. Supplied with (3) three wire nuts, and (3) three mastic seals for waterproofing connections.

9' cord length

KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

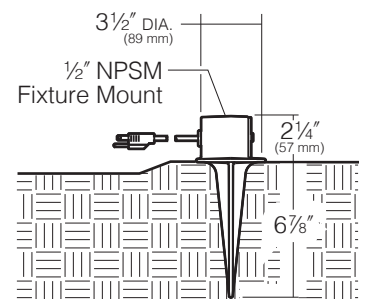

Mounting Options

EPI7/JB1/J-25N/JBR-4/JBR-5/JBR-2/JBR-3/JBR-21/JBR-24/JBR-30
 JBR-32/SM18/J-27N/JW/JWBR/KLV400/KLV405/KLV415

Composite In-grade Architectural Junction Box

- Cat. No.
- | **JBR-4**
- | **JBR-5**
- | **No Option**

Composite box with K" NPSM fixture mount and composite cover. Internal set screw provided for locking position. 19 cu in. internal volume.

- JBR-4** (2) L" NPT knock-outs in bottom
(4) L" NPT knock-outs on sides @ 90°
- JBR-5** Same as above but with brass cover

NOTE: May also be used to hard mount low voltage fixtures.


7 Year Limited Warranty:

Composite junction boxes are warranted for 7 years, from date of sale, against manufacturing defects.

Application Notes

- Creates a flush-mounted appearance.
- May be cast in concrete for increased stability.

CAUTION: Fixture stem and swivel must not contact soil or standing water. Provide drainage away from junction box.



Brass In-grade Architectural Junction Box

- Cat. No.
- | **JBR-2**
- | **JBR-3**
- | **JBR-21**
- | **JBR-24**
- | **No Option**

Die-cast brass with K" NPSM fixture mount and die-cast cover. Internal set screw provided for locking position. 18 cu in. internal volume.

- JBR-2** (2) K" NPT in bottom
- JBR-3** (2) L" NPT in bottom
- JBR-21** (2) K" NPT in sides, (2) K" NPT in bottom
- JBR-24** (4) K" NPT in sides, (2) K" NPT in bottom

All side taps provided with plugs.

NOTE: May also be used to hard mount low voltage fixtures.


25 Year Limited Warranty:

Solid brass junction boxes are warranted for 25 years, from date of sale, against manufacturing defects and failure due to corrosion.

Application Notes

- Creates a flush-mounted appearance.
- May be cast in concrete for increased stability.

CAUTION: Fixture stem and swivel must not contact soil or standing water. Provide drainage away from junction box.



Mounting Options

EPI7 / JB1 / J-25N / JBR-4 / JBR-5 / JBR-2 / JBR-3 / JBR-21 / JBR-24 / JBR-30
 JBR-32 / SM18 / J-27N / JW / JWBR / KLV400 / KLV405 / KLV415

Brass In-grade Staked Junction Box

Cat. No.
 | **JBR30**
 | **No Option**

**JBR30
 BRASS IN-GRADE STAKED JUNCTION BOX**

Die-cast brass with K" NPSM fixture mount and die-cast cover. Internal set screw provided for locking position. 18 cu in. internal volume.

(2) K" NPT in bottom with (2) 19" long stakes

NOTE: May also be used to hard mount low voltage fixtures.

Brass In-grade Staked Junction Box with Cord

Cat. No.
 | **JBR32**
 | **No Option**

**JBR32
 BRASS IN-GRADE STAKED JUNCTION BOX WITH CORD**

Die-cast brass with K" NPSM fixture mount and die-cast cover. Internal set screw provided for locking position. 18 cu in. internal volume. (SJTW-A) 3 wire cord and plug coming out the side of the junction box. Supplied with (3) three wire nuts, and (3) three mastic seals for waterproofing connections.

(2) 19" long stakes with 9' cord


25 Year Limited Warranty:

Solid brass junction boxes are warranted for 25 years, from date of sale, against manufacturing defects and failure due to corrosion.

Application Notes

- Creates a flush-mounted appearance.
- May be cast in concrete for increased stability.

CAUTION: Fixture stem and swivel must not contact soil or standing water. Provide drainage away from junction box.

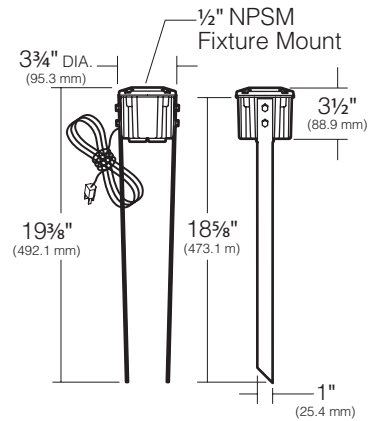

Mounting Options

EPI7/ JB1/ J-25N/ JBR-4/ JBR-5/ JBR-2/ JBR-3/ JBR-21/ JBR-24/ JBR-30

JBR-32/ SM18/ J-27N/ JW/ JWBR/ KLV400/ KLV405/ KLV415

<p>Stanchion Mount</p> <p>Cat. No. Finish</p> <p> SM18/BL Black</p> <p> SM18/DB Dark Bronze</p> <p> SM18/GR Verde Green</p> <p> No Option</p>	<p>3" O.D. by .188" wall cast aluminum with K" NPSM fixture mount and hand hole with flush cover. Internal set screw fixture lock accessible through hand hole. Internal ground lug supplied with installed lead. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.</p> <p>NOTE: May also be used to hard mount low voltage fixtures.</p>	
<p>Surface Mount</p> <p>Cat. No. Finish</p> <p> J-27N/BL Black</p> <p> J-27N/DB Dark Bronze</p> <p> J-27N/GR Verde Green</p> <p> No Option</p>	<p>Cast aluminum with K" NPSM fixture mount. Internal set screw provided for locking position. 5 cu in. internal volume. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.</p> <p>NOTE: May also be used to hard mount low voltage fixtures.</p>	
<p>Architectural Wall Mount</p> <p>Cat. No. Finish</p> <p> JW/BL Black</p> <p> JW/DB Dark Bronze</p> <p> JW/GR Verde Green</p> <p> No Option</p>	<p>Die-cast aluminum with K" NPSM fixture mount. Internal set screw provided for locking position. Canopy attaches to stainless steel wall plate for mounting to any standard electrical outlet box. Super TGIC powder coat paint over titanated zirconium conversion coating.</p> <p>NOTE: May also be used to hard mount low voltage fixtures.</p>	
<p>Brass Architectural Wall Mount</p> <p>Cat. No. Finish</p> <p> JWBR/NB Natural Brass</p> <p> JWBR/VG Verde Green Patina</p> <p> No Option</p>	<p>Die-cast brass with K" NPSM fixture mount. Internal set screw provided for locking position. Canopy attaches to stainless steel wall plate for mounting to any standard electrical outlet box.</p> <p>NOTE: May also be used to hard mount low voltage fixtures.</p>	

Mounting Options

EPI7/JB1/J-25N/JBR-4/JBR-5/JBR-2/JBR-3/JBR-21/JBR-24/JBR-30

JBR-32/SM18/J-27N/JW/JWBR/KLV400/KLV405/KLV415


Low Voltage Spear Mount

Cat. No.	Finish
KLV400BL	Black
KLV400DB	Dark Bronze
KLV400GR	Verde Green
No Option	

Die-cast low copper aluminum with K" NPSM fixture mount. Stainless steel set screw locks fixture into mount. Cable slot allows easy fixture mounting before or after installation in ground. Super TGIC powder coat paint over clear anodizing and Titanated Zirconium conversion coating. **NOTE:** For use with 12V fixtures only.

Spear Mounting in Concrete

In addition to soil mounting, the KLV400 can be installed in a concrete footing for added stability and permanence.

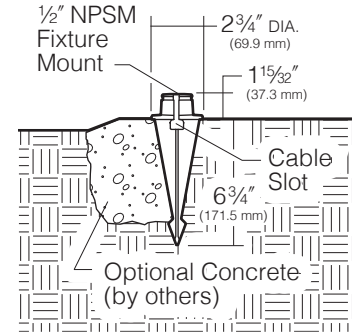

Low Voltage Surface Mount

Cat. No.	Finish
KLV405BL	Black
KLV405DB	Dark Bronze
KLV405GR	Verde Green
No Option	

Die-cast low copper aluminum with K" NPSM fixture mount. Stainless steel set screw locks fixture into mount. Two holes provided for flat head wood screws. Super TGIC powder coat paint over clear anodizing and Titanated Zirconium conversion coating. **NOTE:** For use with 12V fixtures only.

