

VSB1 LED Square Bollard

SINGLE FUNCTION, VANDAL-RESISTANT, ALUMINUM SHAFT

Type:
Job:
Catalog number:




Approvals:

VSB1	/	/
Fixture	Electrical Module	Top Cap and Shaft Finish
See page 2		

Specifications

VSB Models
 10 - 20 Diodes

VSB1 - Single Function Luminaire (Aluminum Shaft)
 Maximum weight: 35 lb

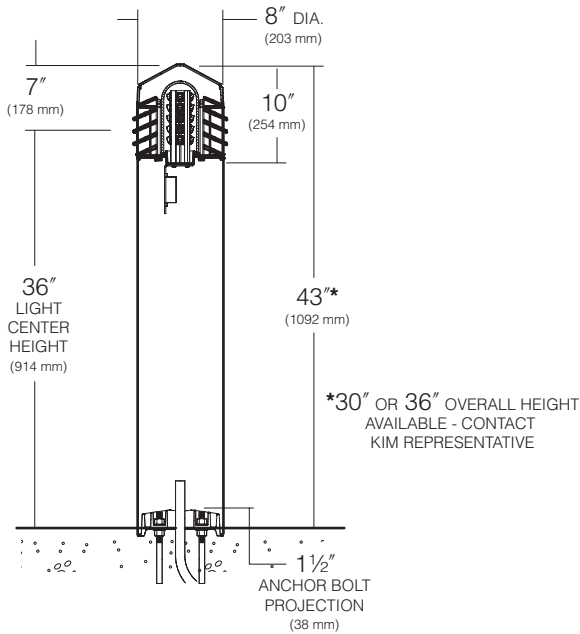

U.S. Patent D410,553

Top Cap: One-piece, die-cast low copper (<0.6% Cu) aluminum 3/16" minimum thickness, secured to louvers by concealed stainless steel allen screws in keyhole slots. For relamping access, allen screws shall not require complete removal.

Louvers: One-piece, die-cast low copper (<0.6% Cu) aluminum with vertical support ribs at 90° intervals. Horizontal louver blades shall have a 1 3/4" depth, and be angled 25° from the horizontal. Louvers shall provide light source cutoff above horizontal. Louver castings shall be secured to shaft by four internal tie rods.

Lamp Enclosure: One-piece tempered molded glass with internal flutes and full silicone gasketing at bottom edge.

Fixture Head: Allows flow-through ventilation around and above the lamp enclosure.

Shaft: One-piece extruded aluminum, .156" minimum wall thickness with a heavy cast aluminum anchor base concealed within the shaft. Hex socket stainless steel screws shall lock shaft onto the cast anchor base.

Electronic Module: All electrical components are either UL or ETL recognized, mounted on a single plate and factory prewired with quick disconnect plugs. Driver is rated for -40°F starting and has a 0-10V dimming interface for multi-level illumination options.

Optical Module: Each LED equipped with a directional optic for maximum beam angle projecting through louver stack spacings. LED boards to be mounted to an anodized inter-locking heat sink extrusion. (Type I) two 5-LED boards for a total of 10-LED. (Type III) three 5-LED boards for a total of 15-LED. (Type V) four 5-LED boards for a total of 20-LED. Available in 580nm Amber, 3000K, 4000K and 5000K color temperatures.

Anchor Bolts: Four 3/8" x 10" + 2" zinc plated L-hooks, each with two nuts, washers and a rigid pressed board template.

Finish: Each luminaire receives a fade and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) polyester powdercoat finish.


Listed to: UL 1598 Standard for Luminaires - UL 8750 Standard for Safety for Light Emitting Diode (LED) Equipment for use in Lighting Products and CSA C22.2#250.0 Luminaires. RoHS compliant. Meets Buy American provisions within ARRA.

CAUTION: Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.

KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

VS B1 LED Square Bollard

SINGLE FUNCTION, VANDAL-RESISTANT, ALUMINUM SHAFT




Standard Features



<p>Fixture</p>	<p>Cat. No. VS B1 Single Function, Aluminum Shaft, Gabled Top</p>			
<p>Electrical Module LED</p>	<p>Cat. Nos. for LED Electrical Modules available:</p> <table border="0" style="width: 100%; text-align: center;"> <tr> <td style="width: 33%; vertical-align: top;"> <p>xL</p> <p>Source:</p> <ul style="list-style-type: none"> 10L= 10 LED (IES Type I) 15L= 15 LED (IES Type III) 20L= 20 LED (IES Type V) </td> <td style="width: 33%; vertical-align: top;"> <p>xK</p> <p>Color Temperature:</p> <ul style="list-style-type: none"> 2K = 580nm - Amber 3K = 3000K 4K = 4000K 5K = 5000K </td> <td style="width: 33%; vertical-align: top;"> <p>UV</p> <p>Voltage:</p> <ul style="list-style-type: none"> UV Universal Voltage shall range from 120V-277V </td> </tr> </table>	<p>xL</p> <p>Source:</p> <ul style="list-style-type: none"> 10L= 10 LED (IES Type I) 15L= 15 LED (IES Type III) 20L= 20 LED (IES Type V) 	<p>xK</p> <p>Color Temperature:</p> <ul style="list-style-type: none"> 2K = 580nm - Amber 3K = 3000K 4K = 4000K 5K = 5000K 	<p>UV</p> <p>Voltage:</p> <ul style="list-style-type: none"> UV Universal Voltage shall range from 120V-277V
<p>xL</p> <p>Source:</p> <ul style="list-style-type: none"> 10L= 10 LED (IES Type I) 15L= 15 LED (IES Type III) 20L= 20 LED (IES Type V) 	<p>xK</p> <p>Color Temperature:</p> <ul style="list-style-type: none"> 2K = 580nm - Amber 3K = 3000K 4K = 4000K 5K = 5000K 	<p>UV</p> <p>Voltage:</p> <ul style="list-style-type: none"> UV Universal Voltage shall range from 120V-277V 		
<p>Finish TGIC powder coat paint over a titanated zirconium conversion coating on fixture and shaft.</p>	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%; vertical-align: top;"> <p>Cat. No.: Color:</p> <ul style="list-style-type: none"> BLS Black Gloss Smooth BLT Black Matte Textured DBS Dark Bronze Gloss Smooth DBT Dark Bronze Matte Textured GTT Graphic Matte Textured LGS Light Grey Gloss Smooth </td> <td style="width: 50%; vertical-align: top;"> <p>Cat. No.: Color:</p> <ul style="list-style-type: none"> LGT Light Grey Matte Textured PSS Platinum Silver Gloss Smooth VGT Verde Green Matte Textured WHS White Gloss Smooth WHT White Matte Textured CC¹ Custom Color </td> </tr> </table> <p>NOTE: Black and Dark Bronze colors will produce slightly less louver brightness than Light Gray or White.</p> <p>¹ Custom colors subject to additional charges, minimum quantities and extended lead times. Available on fixture head only. Consult representative. Custom color description: _____</p>	<p>Cat. No.: Color:</p> <ul style="list-style-type: none"> BLS Black Gloss Smooth BLT Black Matte Textured DBS Dark Bronze Gloss Smooth DBT Dark Bronze Matte Textured GTT Graphic Matte Textured LGS Light Grey Gloss Smooth 	<p>Cat. No.: Color:</p> <ul style="list-style-type: none"> LGT Light Grey Matte Textured PSS Platinum Silver Gloss Smooth VGT Verde Green Matte Textured WHS White Gloss Smooth WHT White Matte Textured CC¹ Custom Color 	
<p>Cat. No.: Color:</p> <ul style="list-style-type: none"> BLS Black Gloss Smooth BLT Black Matte Textured DBS Dark Bronze Gloss Smooth DBT Dark Bronze Matte Textured GTT Graphic Matte Textured LGS Light Grey Gloss Smooth 	<p>Cat. No.: Color:</p> <ul style="list-style-type: none"> LGT Light Grey Matte Textured PSS Platinum Silver Gloss Smooth VGT Verde Green Matte Textured WHS White Gloss Smooth WHT White Matte Textured CC¹ Custom Color 			

VSB1 LED Square Bollard

SINGLE FUNCTION, VANDAL-RESISTANT, ALUMINUM SHAFT




Standard Features

<p>Battery Back-up Cat. No. EM No Option</p>	<p>Internal battery pack provides 90 minutes of supplemental light at 50% of initial lamp lumens.</p>	
<p>Optional Duplex Receptacle Cat. No. DR DR-GFI No Option</p>	<p>Mounted 18" from bottom of shaft with a gasketed While-In-Use cover with locking tab. Painted to match bollard. DR weather proof duplex receptacle rated 20A, 125V. DR-GFI weather proof duplex receptacle with ground fault circuit interrupter rated 20A, 125V.</p>	
<p>0-10V Dimming Interface</p>	<p>Driver has a 0-10V dimming interface with a dimming range of 10-100%. Is compatible with most control systems. Controls compatible via Pink and Purple dimming lead.</p>	

VSB1 LED Square Bollard

SINGLE FUNCTION, VANDAL-RESISTANT, ALUMINUM SHAFT



Standard Features

Electrical Drive Current - @350mA						
Volts - AC	Type 1		Type 3		Type 5	
	Amps - AC	System Watts	Amps - AC	System Watts	Amps - AC	System Watts
120	0.11	13	0.16	19	0.21	25
208	0.06	13	0.09	19	0.12	25
240	0.05	13	0.08	19	0.10	25
277	0.05	13	0.07	19	0.09	25

B.U.G. Rating (TM15) in Lumens where B = Backlight, U = Uplight, G = Glare			
Temperature	TYPE 1	TYPE 3	TYPE 5
3000K	B1 U2 G1	B1 U3 G1	B1 U3 G1
4000K	B1 U2 G1	B1 U3 G1	B1 U3 G1
5000K	B1 U2 G1	B1 U3 G1	B1 U3 G1

Absolute Lumens			
Temperature	TYPE 1	TYPE 3	TYPE 5
3000K	546	784	1121
4000K	560	804	1150
5000K	567	813	1163

LED performance and lumen output continues to improve at a rapid pace. For custom optics and color temperature configurations, contact factory.