

VSB2C LED Square Bollard

DUAL FUNCTION, VANDAL-RESISTANT, CONCRETE SHAFT

Type:
Job:
Catalog number:

Approvals:


VSB2C	/	/	/
Fixture	Electrical Module	Top Cap Finish	Concrete Shaft Finish

See page 2


Specifications

VSB Models
 10 - 20 Diodes

VSB2C - Dual Function Luminaire (Concrete Shaft)
 Maximum weight: 120 lb

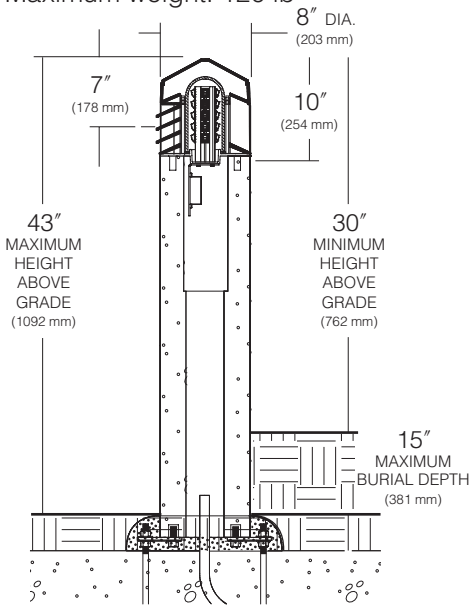

**BASE PLAN
 VSB
 CONCRETE SHAFT**

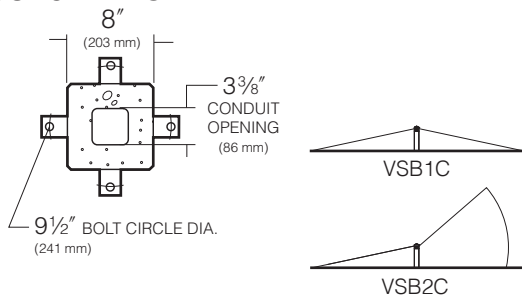

U.S. Patent D410,553

Top Cap: Die-cast, low copper (<0.6% Cu) aluminum 3/16" minimum thickness, secured to louvers by concealed stainless steel allen screws in keyhole slots. For relamping access, allen screws shall not require complete removal.

Louvers: One-piece sand-cast with horizontal and vertical blades. Horizontal louvers shall provide 270° of down-lighting with source cutoff above horizontal. Vertical louver shall provide 90° of non-cutoff lighting. Horizontal louver blades shall have a 1 3/4" depth, and be angled 25° from the horizontal. Vertical louver blades shall have a 1 3/4" depth with a 45° spacing. Louver castings shall be secured to shaft by four internal tie rods.

Lamp Enclosure: One-piece tempered molded glass with internal flutes and full silicone gasketing at bottom edge.

Fixture Head: Allows flow-through ventilation around and above the lamp enclosure.

Electronic Module: All electrical components are either UL or ETL recognized, mounted on a single plate and factory prewired with quick disconnect plugs. Driver is rated for -40°F starting and has a 0-10V dimming interface for multi-level illumination options.

Optical Module: Each LED equipped with a directional optic for maximum beam angle projecting through louver stack spacings. LED boards to be mounted to an anodized inter-locking heat sink extrusion. (Type I) two 5-LED boards for a total of 10-LED. (Type III) three 5-LED boards for a total of 15-LED. (Type V) four 5-LED boards for a total of 20-LED. Available in 580nm Amber, 3000K, 4000K and 5000K color temperatures.

Material: Cement shall conform to current specifications for "Portland Cement." ASTM C150, Type I or II. Aggregates shall meet current requirements of "Specifications for Concrete Aggregates," ASTM C33. Water shall be clean and free from deleterious amounts of silt, oil, acids, alkalis or organic materials. Wire for reinforcement shall conform to ASTM A185. Steel for lugs and plates shall conform to ASTM A36, or A283 grade D.

Surface: Medium sand-blasted with anti-graffiti sealer. Available colors are Charcoal, Brown, Natural Gray or White, integral in concrete mix.

Cure and Strength: Allows for completion of the hydration process, and result in a 28 day compressive strength of not less than 4,500 psi.

Manufacture: Fiberglass molds used to insure uniform parts. Mold parting lines may be slightly visible in finished parts.

Anchorage: Four steel mounting tabs for installation on four K" x 10" + 2" zinc electroplated L-hook anchor bolts. Each anchor bolt is supplied with two nuts, two washers, and a rigid pressed board template.

Shipment: Palletized with adequate hold-downs to prevent load movement in transit.

Finish: Each luminaire receives a fade and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) polyester powdercoat finish.


Listed to: UL 1598 Standard for Luminaires - UL 8750 Standard for Safety for Light Emitting Diode (LED) Equipment for use in Lighting Products and CSA C22.2#250.0 Luminaires. RoHS compliant. Meets Buy American provisions within ARRA.

CAUTION: Fixtures must be grounded in accordance with national, state and/ or local electrical codes. Failure to do so may result in serious personal injury.

KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

VS2C LED Square Bollard

DUAL FUNCTION, VANDAL-RESISTANT, CONCRETE SHAFT




Standard Features



<p>Fixture</p>	<p>Cat. No. VS2C Dual Function, Concrete Shaft, Gabled Top</p>			
<p>Electrical Module LED = Light Emitting Diodes</p>	<p>Cat. Nos. for LED Electrical Modules available:</p> <table border="0" style="width: 100%;"> <tr> <td style="text-align: center; vertical-align: top;"> <p>x</p> <p>Source: Source:</p> <ul style="list-style-type: none"> 10 = 10 LED (IES Type I) 15 = 15 LED (IES Type III) 20 = 20 LED (IES Type V) </td> <td style="text-align: center; vertical-align: top;"> <p>xK</p> <p>Color Temperature:</p> <ul style="list-style-type: none"> 2K = 580nm - Amber 3K = 3000K 4K = 4000K 5K = 5000K </td> <td style="text-align: center; vertical-align: top;"> <p>UV</p> <p>Voltage:</p> <ul style="list-style-type: none"> UV Universal Voltage shall range from 120V-277V </td> </tr> </table>	<p>x</p> <p>Source: Source:</p> <ul style="list-style-type: none"> 10 = 10 LED (IES Type I) 15 = 15 LED (IES Type III) 20 = 20 LED (IES Type V) 	<p>xK</p> <p>Color Temperature:</p> <ul style="list-style-type: none"> 2K = 580nm - Amber 3K = 3000K 4K = 4000K 5K = 5000K 	<p>UV</p> <p>Voltage:</p> <ul style="list-style-type: none"> UV Universal Voltage shall range from 120V-277V
<p>x</p> <p>Source: Source:</p> <ul style="list-style-type: none"> 10 = 10 LED (IES Type I) 15 = 15 LED (IES Type III) 20 = 20 LED (IES Type V) 	<p>xK</p> <p>Color Temperature:</p> <ul style="list-style-type: none"> 2K = 580nm - Amber 3K = 3000K 4K = 4000K 5K = 5000K 	<p>UV</p> <p>Voltage:</p> <ul style="list-style-type: none"> UV Universal Voltage shall range from 120V-277V 		
<p>Finish TGIC thermoset polyester powder coat paint on fixture top cap. Concrete shaft surface color is integral in concrete mix. Available in any combination of paint and concrete finishes listed at right.</p>	<table border="0" style="width: 100%;"> <tr> <td style="vertical-align: top;"> <p>Top Cap</p> <p>Cat. No.: Color:</p> <ul style="list-style-type: none"> BLS Black Gloss Smooth BLT Black Matte Textured DBS Dark Bronze Gloss Smooth DBT Dark Bronze Matte Textured GTT Graphic Matte Textured LGS Light Grey Gloss Smooth <p>Concrete Shaft</p> <ul style="list-style-type: none"> BR-C Brown CH-C Charcoal </td> <td style="vertical-align: top;"> <p>Cat. No.: Color:</p> <ul style="list-style-type: none"> LGT Light Grey Matte Textured PSS Platinum Silver Gloss Smooth VGT Verde Green Matte Textured WHS White Gloss Smooth WHT White Matte Textured CC¹ Custom Color <ul style="list-style-type: none"> NG-C Natural Gray WH-C White </td> </tr> </table> <p>NOTE: Black and Dark Bronze colors will produce slightly less louver brightness than Light Gray or White.</p> <p>¹ Custom colors subject to additional charges, minimum quantities and extended lead times. Available on fixture head only. Consult representative. Custom color description: _____</p>	<p>Top Cap</p> <p>Cat. No.: Color:</p> <ul style="list-style-type: none"> BLS Black Gloss Smooth BLT Black Matte Textured DBS Dark Bronze Gloss Smooth DBT Dark Bronze Matte Textured GTT Graphic Matte Textured LGS Light Grey Gloss Smooth <p>Concrete Shaft</p> <ul style="list-style-type: none"> BR-C Brown CH-C Charcoal 	<p>Cat. No.: Color:</p> <ul style="list-style-type: none"> LGT Light Grey Matte Textured PSS Platinum Silver Gloss Smooth VGT Verde Green Matte Textured WHS White Gloss Smooth WHT White Matte Textured CC¹ Custom Color <ul style="list-style-type: none"> NG-C Natural Gray WH-C White 	
<p>Top Cap</p> <p>Cat. No.: Color:</p> <ul style="list-style-type: none"> BLS Black Gloss Smooth BLT Black Matte Textured DBS Dark Bronze Gloss Smooth DBT Dark Bronze Matte Textured GTT Graphic Matte Textured LGS Light Grey Gloss Smooth <p>Concrete Shaft</p> <ul style="list-style-type: none"> BR-C Brown CH-C Charcoal 	<p>Cat. No.: Color:</p> <ul style="list-style-type: none"> LGT Light Grey Matte Textured PSS Platinum Silver Gloss Smooth VGT Verde Green Matte Textured WHS White Gloss Smooth WHT White Matte Textured CC¹ Custom Color <ul style="list-style-type: none"> NG-C Natural Gray WH-C White 			

VSB2C LED Square Bollard

DUAL FUNCTION, VANDAL-RESISTANT, CONCRETE SHAFT




Standard Features

<p>Battery Back-up Cat. No. EM No Option</p>	<p>Internal battery pack provides 90 minutes of supplemental light at 50% of initial lamp lumens.</p>	 <p>battery back-up</p>
<p>0-10V Dimming Interface</p>	<p>Driver has a 0-10V dimming interface with a dimming range of 10-100%. Is compatible with most control systems. Note: Not compatible with current sourcing dimmers. Controls compatible via Pink and Purple dimming lead.</p>	

VSB2C LED Square Bollard

DUAL FUNCTION, VANDAL-RESISTANT, CONCRETE SHAFT



Lumen Data

Electrical Drive Current - @350mA						
Volts - AC	Type 1		Type 3		Type 5	
	Amps - AC	System Watts	Amps - AC	System Watts	Amps - AC	System Watts
120	0.11	13	0.16	19	0.21	25
208	0.06	13	0.09	19	0.12	25
240	0.05	13	0.08	19	0.10	25
277	0.05	13	0.07	19	0.09	25

B.U.G. Rating (TM15) in Lumens where B = Backlight, U = Uplight, G = Glare			
Temperature	TYPE 1	TYPE 3	TYPE 5
3000K	N/A	N/A	B1 U3 G2
4000K	N/A	N/A	B1 U3 G2
5000K	N/A	N/A	B1 U3 G2

Absolute Lumens			
Temperature	TYPE 1	TYPE 3	TYPE 5
3000K	N/A	N/A	1073
4000K	N/A	N/A	1101
5000K	N/A	N/A	1113

LED performance and lumen output continues to improve at a rapid pace. For custom optics and color temperature configurations, contact factory.