

WF-LED-KIT

WALL FORMS ROUND HID TO LED UPGRADE KIT


FEATURES

- 9 or 18 energy efficient LED diodes
- Four optical configurations for architectural accent lighting application
- LED color temperatures include 580nm (Amber), 3000K, 4000K and 5000K
- Universal Voltage (120-277V)


Certifications



SPECIFICATIONS

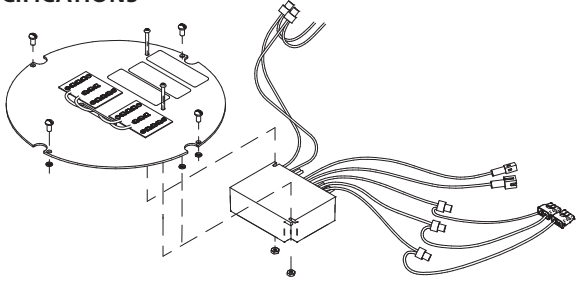

WF20/WF30
Two modules for 18 LED version (shown)
One module for 9 LED version



WF21/22/23/31/32/33
Two modules for 18 LED version (shown)
One module for 9 LED version

Fixture	Electrical Module			
	Source	Color Temperature	Voltage	
WF20-LED KIT	9L 9 LEDs	2K 580nm	UV Universal Voltage from 120-277V with a ±10% tolerance	
WF21-LED KIT	18L 18 LEDs	3K 3000K		
WF22-LED KIT		4K 4000K		
WF23-LED KIT		5K 5100K		
WF30-LED KIT				
WF31-LED KIT				
WF32-LED KIT				
WF33-LED KIT				

WF-LED-KIT

WALL FORMS ROUND HID TO LED UPGRADE KIT SPECIFICATIONS

LED Optical System:

- A total of 9 LED emitters configured in a rectangular array comprised together as a module.
- One (1) module for 9 LED version and two (2) modules for 18 LED version.
- Available in 580nm (Amber), 3000K, 4200K and 5100K.

Driver:

- Rated for 9 or 18 LED.
- Universal voltage from 120 to 277V with a $\pm 10\%$ tolerance.
- 40°F starting temperature.
- Drivers are Underwriters Laboratories recognized.

0-10V Dimming Interface:

- Driver has 0-10V dimming interface with a range of 10-100%.
- Is compatible with most control systems.
- Note: Not compatible with current sourcing dimmers. Controls compatible via Pink and Purple dimming leads. Always consult with control company for compatibility.

Certifications and Listings:

- UL 1598 Standard for for wet locations.
- UL 8750 Standard for Safety for Light Emitting Diode (LED) Equipment for use in Lighting Products.
- CSA C22.2#250.0 Luminaires.
- ANSI C136.31-2010 3G Vibration tested and compliant
- RoHS compliant.

CAUTION:

- Fixtures must be grounded in accordance with national, state and/or local electrical codes, Failure to do so may result in serious personal injury.

