

SAE 102

LINEAR WALL INDIRECT/DIRECT SAE 102

Fixture Type:


Project Name:

Ordering Guide

Feature	Code	Options	Description
Program		SAE	SAE Program
Series		102	102
Mounting		W	Wall Mount
Fixture Distribution		ID	Indirect/Direct
Row Length (in feet)		—'	Enter in foot increments. Note fixture lengths below.
Max Length in row		02 03 04 06 08	2', 610mm 3', 914mm 4', 1219mm 6', 1829mm 8', 2438mm
Downlight Diffuser		SOF	Soft Diffuse Lens
Finish/Color		C1 C2 C3 C4 C5 C6 CC	Matte White (Default) Textured Matte White Light Silver Machined Aluminum Carbon Black Textured Camera Black Custom Color
Color Temperature		27K 30K 35K 40K 50K 27K9 30K9 35K9 40K9 50K9 2230TD 2750T 2765T	2700K 3000K 3500K 4000K 5000K+ 2700K, 90 CRI 3000K, 90 CRI 3500K, 90 CRI 4000K, 90 CRI 5000K, 90 CRI+ 2200K-3000K SpectraSync™ Dim to Warm* 2700K-5000K SpectraSync™ Tunable White* 2700K-6500K SpectraSync™ Tunable White* *Must be ordered with D05 Driver option; excludes 2' and 3' lengths
Indirect output/ft (specifiable in 50 lumen/ft increments)		I050 I145	500 1450
Direct output/ft (specifiable in 50 lumen/ft increments)		D040 D105	400 1050

+ Additional lead time may be applicable. Contact factory.

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

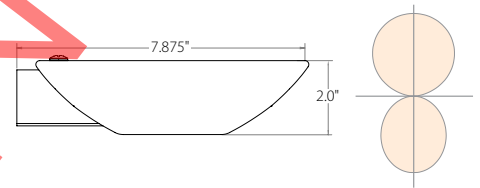

Key Features:

- Vi Technology for specifiable output/wattage
- SpectraSync™ Color Tuning Technology
- Maximum color variation of 2 SDCM
- Continuous lens with flanged end casting to eliminate light leak
- Interlocking feature for row joining to eliminate light leak and facilitate ease of installation

Performance

Uplight

Nomenclature	Lumens/ft	W/ft	Efficacy
I050 (min)	500	3.5	152
I060	600	4.3	148
I070	700	4.9	152
I080	800	5.3	162
I090	900	6.4	150
I100	1000	7.5	144
I110	1100	8.6	138
I120	1200	9.1	142

Downlight

Nomenclature	Lumens/ft	W/ft	Efficacy
D040 (min)	400	3.5	113
D050	500	4.7	106
D060	600	5.5	110
D070	700	6.4	110
D080	800	7.4	108
D090	900	8.7	104
D095	950	9.0	105



SAE 102

LINEAR WALL INDIRECT/DIRECT SAE 102

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

Ordering Guide (continued)

Driver		NDM	Non Dimming
		D05	5% Dimming, 0-10V*
		D01	1% Dimming, 0-10V
		DS1	Soft-Start 1% Dimming, 0-10V
		D00	Dim-to-off (1%), 0-10V
		DS0	Soft-Start Dim-to-off (1%), 0-10V
		LEC	Lutron Ecosystem Dimming
		LTW	Lutron Hi-Lume 1% 2-wire LED driver (120V forward phase only)
		DALI	DALI*
		DALIP	Powered DALI (2.0)*
*Must be ordered with 2230TD, 2750T or 2765T option			
Circuiting		1C	1 Circuit
		2C	2 Circuit - Uplight/Downlight
Voltage		UNV	Universal Voltage (120V through 277V)
		347	347 Volt** *Excludes Emergency Battery Pack 'EF' Option. Excludes DALI and DALIP Dimming Drivers
Optional Features	Code	Options	Description
Nightlight		NL	Nightlight Circuit Required. Enter quantity. 2NL= 2 nightlight circuits/row
Emergency		EF	10W Emergency Battery Backup. Enter quantity. 2EF =2 Emergency batteries/row. See Details for restrictions.
Thru-wiring		W1	No Thru Wire
		W2	Provide Normal and Emergency Thru Wiring*
		W3	Provide Normal Thru Wiring Only *Only applicable when specified with emergency
Dust Cover		L1	Clear Acrylic Dust Cover Lens

* Additional lead time may be applicable. Contact factory.

SAE 102

LINEAR WALL INDIRECT/DIRECT SAE 102

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

Ordering Guide (continued)

Control Options	Code	Options	Description
NX**		NXE	NX Wired Dual RJ45 SmartPORTS, without Sensor
		NXW	NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor
		NXERM	NX Wired Dual RJ45 SmartPORTS and Integral NXSMP2-LMI PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming
		NXWRM	NX Networked Wireless Enabled Integral NXSMP2-LMI PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming *Not available for row mounting; Only available with 0-10V Driver options; Contact factory for Length restrictions
Sensors*		_SD1	Daylight Sensor Required. Enter quantity. 2SD1= 2 daylight sensors/row
		_SO4	Occupancy Sensor Required. Enter quantity. 2SO4= 2 occupancy sensors/row

* Additional lead time may be applicable. Contact factory.

SAE 102

LINEAR WALL INDIRECT/DIRECT SAE 102

Details (continued)

Mounting:

Wall brackets ship separately. Install over standard 2x4" junction box. 2' uses one bracket located at center. 3' used two brackets 6" from each end. 4', 6' and 8' uses two brackets 12" from each end.

Construction:

Housing- Steel
End Caps- Die Cast Aluminum
Lens- Acrylic


Finish/Color:

Visit product finishes website for details.
CC- Customer Colors may be subject to extended lead times.

Color Temperature:

27K-2700K output multiplier (0.95)
30K-3000K output multiplier (0.98)
35K-3500K output multiplier (1.00)*
40K-4000K output multiplier (1.03)
50K-5000K output multiplier (1.05)
27K9-2700K 90 CRI output multiplier (0.83)
30K9-3000K 90 CRI output multiplier (0.85)
35K9-3500K 90 CRI output multiplier (0.88)
40K9-4000K 90 CRI output multiplier (0.90)
50K9-5000K 90 CRI output multiplier (0.93)

*Scale all values from 35K



Color Variation:

2 step MacAdam ellipse

Output (VI technology):

Variable Intensity (VI) technology allows precise specification of fixture output/wattage. Fixture will be programmed and labeled to specification.

Output:

Specify in 50 lumen increments within the below range:

Indirect Output

	Lumens/ft	Nomenclature
Min:	500	I050
Max:	1450	I145

Direct Output

	Lumens/ft	Nomenclature
Min:	400	D040
Max:	1050	D105

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

Driver:

NDM: Non-dimming. Fixture will be wired for fixed light output.
D05: Osram 100%-5% dimming range. Fixture will be wired for low voltage 0-10V dimming control. Only applicable if either 2230TD, 2750T or 2765T is selected.
D01: 100%-1% dimming range. Fixture will be wired for low voltage 0-10V dimming control.
DS1: Soft-Start 100%-1% dimming range. Fixture will be wired for low voltage 0-10V dimming control.
D00: Dim-to-off 100%-1% Dimming range. Fixture will be wired for low voltage 0-10V dimming control.
DS0: Soft-Start Dim-to-off 100%-1% dimming range. Fixture will be wired for low voltage 0-10V dimming control.
LEC: Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black dimming technology
LTW: 100% - 1% dimming range. Lutron 2-wire 120V forward phase control dimmer compatible using Hi-Lume 1% 2-wire (LTE series LED driver)
DALI: DALI Compatible.
DALIP: Self-Powered DALI bus (e.g. SR, DEXAL)

Thru-Wiring:

See separate LG Thru-Wire spec sheet for additional details.

Circuiting:

1C (1 Circuit) Fixture wired for a single circuit.
2C (2 Circuit uplight/downlight) Uplight and Downlight switched/dimmed separately. Two power feeds required.

NX Lighting Controls:



Supports indoor and outdoor applications, wired, wireless and hybrid networked NX Lighting Controls deployments and enables emerging applications such as Current Lighting's SpectraSync™ color tuning technology. See separate NX Lighting Controls Application Guide for additional details. See NX Lighting Controls Brochure.

Sensors:

SD1: Daylight sensor (Wattstopper part #FD301).
SO4: Occupancy sensor (Wattstopper part #FS205).
NX Lighting Controls: NX Sensors installs between diffusers. See separate Control Options Guide for additional details.

SpectraSync™ Color Tuning Technology: SpectraSync™

Control your space based on the needs of the application, specific activities throughout the day and preferences of the occupants with two distinct SpectraSync™ Color Tuning Technology.

Dim to Warm: Dim to Warm mimics the familiar warming effect that occurs with traditional incandescent sources as they are dimmed. (Available with 2200K-3000K).

Tunable White: Tunable White offers users the ability to tailor CCT to their personal preference, enhancing task visibility, material and colors or the aesthetics of the space. (Available with 2700K-5000K or 2700K-6500K).

See separate SpectraSync™ Tech Sheet for additional details.
See separate NX Lighting Controls Guide for additional details.

SAE 102

LINEAR WALL INDIRECT/DIRECT SAE 102

Details (continued)

Nightlight:

See separate LC-Nightlight spec sheet for additional details.

Emergency:

EF - 10W battery powered driver.

Provides a minimum of 90 minutes of emergency lighting.

Inverter-Compatible. Provided by others.

Row Joining:

Row joining can be accomplished without disassembling the fixture, with the exception of power feed connection.

Field accessibility:

LED boards and drivers can be accessed, removed, and replaced from installed fixture. Contact factory.

Fixture Weight:

2.750 lbs/ft

Ratings:

CSA listed for damp locations.

This product qualifies as a "designated country construction

material" per FAR 52.225-11 Buy American-Construction.

Materials under Trade Agreements effective 8/14/2020.

Contact factory for configurations including

NX Lighting Controls or sensors.

**Warranty:**

LED boards- 5 years

LED drivers (standard)- 5 years, Lutron- 3 years

Rated Life:

Tested in accordance with the LM79-2008 and derived from EPA TM-21 calculator

L70: 257,000 (calculated per TM-21 extrapolated curve)

L70: >61,000 (reported per TM-21/LM80 6x's limitation)

L90: 66,000 (calculated per TM-21 extrapolated curve)

L90: >61,000 (reported per TM-21/LM80 6x's limitation)



Details (continued)

Color Characteristics:


Value	Ordering Code		
	30K	35K	40K
Rf	82	82	82
Rg	98	95	95
CCT (K)	3014	3441	3985
Duv	-0.0014	-0.0013	-0.0009
x	0.4340	0.4073	0.3805
y	0.3996	0.3888	0.3748
CIE Ra	83	84	84

Color Vector Graphic:



30K:




35K:




40K:



Spectral Distribution:

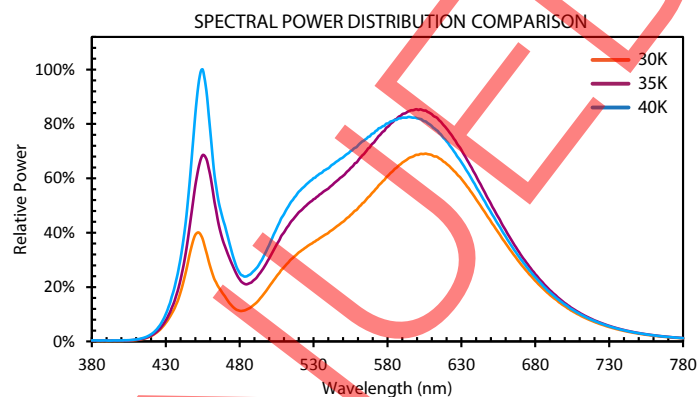

Color Gamut/Fidelity Plot

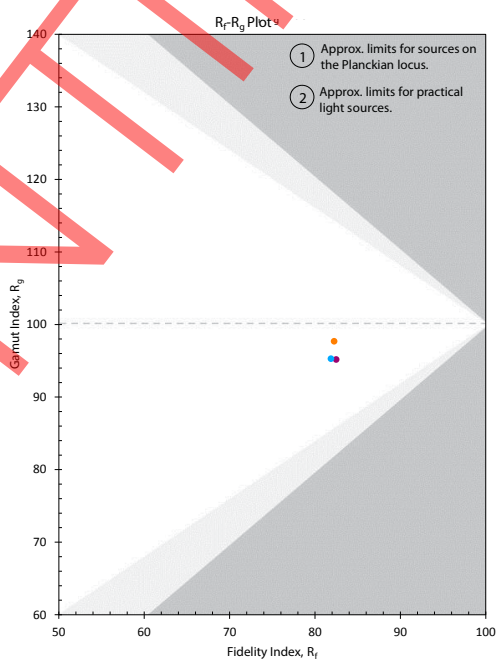

CRI:

80 minimum

CCT	CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
30K	83	82	90	96	81	81	87	84	63	15	77	80	69	84	98
35K	84	83	92	96	81	82	88	85	64	17	79	80	66	85	98
40K	84	83	91	95	82	82	86	87	68	20	76	80	60	85	97

SAE 102

LINEAR WALL INDIRECT/DIRECT SAE 102

Photometry

Fixture: SAE102-W-ID-4-SOF-C1-30K-I040-D050-D01-1C-UNV-W1


CCT: 3000K

Output: I040/D050

Nominal lumens: 900 lumens

Efficacy: 134 lm/W

Test report: 17.00928



Zonal Lumen Summary

Zone	Lumens	Lamp%
0-40	731	20.20%
0-60	1255	34.80%
0-90	1598	44.20%
90-180	2014	55.80%
0-180	3612	100.0%