


- Low voltage wires can be 18-22AWG

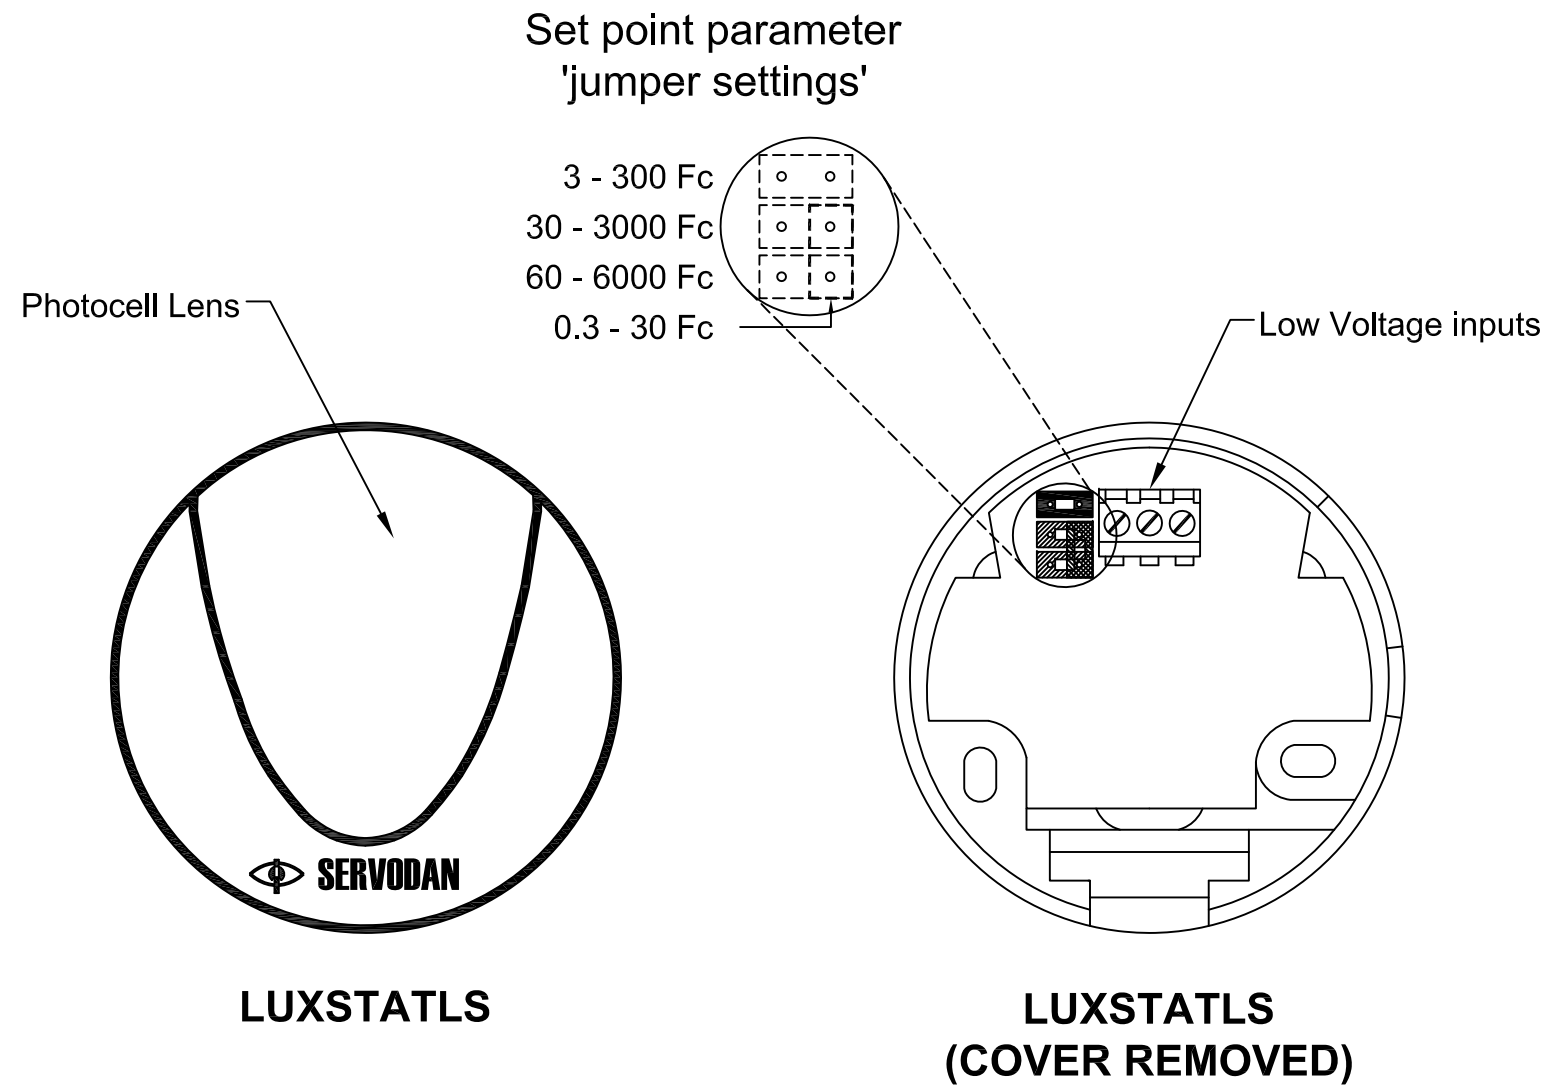

Specifications

Electrical

- Three jumper-selectable foot candle ranges: 3-300Fc; 30-3,000Fc; 60-6,000Fc
- Low-voltage Class 2 device
- Protective hard-plastic cover
- 3-conductor 22 AWG twisted cable - equal to Belden 8443
- Maximum wire length: 250 feet (76.2m)

Dimension

- 2" diameter x 1.2" height (50.8 diameter x 30.5mm height)

Certifications

- UL and cUL Listed

Warranty

- Five-years

Features

Open Loop photosensor

- Indoor and outdoor versions
- Mounts vertically and horizontally

California Title 24 compliant



HUBBELL
Building Automation

LUXSTAT Daylight Sensor

THIS DOCUMENT AND SPECIFICATIONS DESCRIBED WITHIN ARE THE EXCLUSIVE PROPERTY OF HUBBELL BUILDING AUTOMATION ISSUED IN THE STRICTEST CONFIDENCE, AND SHALL NOT BE REPRODUCED, COPIED OR USED WITHOUT PRIOR WRITTEN PERMISSION.