



KIM LIGHTING

P.O. Box 60080 • 16555 East Gale Ave.
City of Industry, California 91716-0080
626/968-5666 • FAX 626/330-3861




Portable Spear Mount Installation Instructions



WARNING: Fixtures must be grounded in accordance with local codes or the National Electrical Code. Portable spear or tree mounts using a cord and plug, must be plugged into a receptacle protected by a Ground Fault Circuit Interrupter (GFCI) in accordance with the National Electrical Code. Failure to take these steps may result in serious personal injury.

KEEP THIS SHEET FOR FUTURE REFERENCE.

INSTALLATION INSTRUCTIONS: Make certain electrical supply is **OFF** before starting installation.

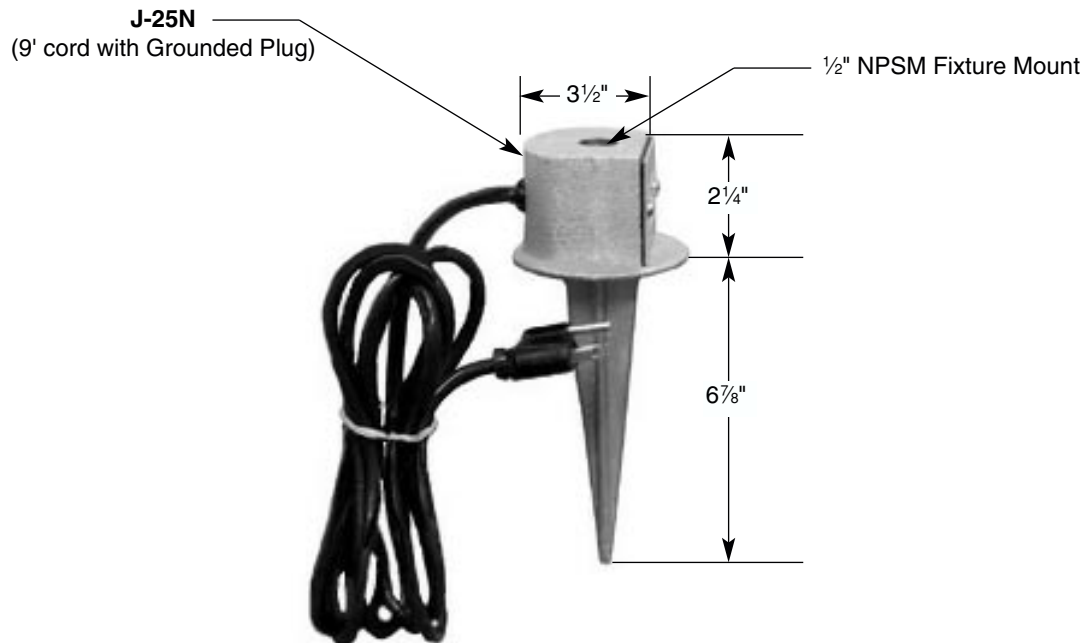

1. Thread fixture onto spear. Using wire nuts supplied, connect leads between spear and fixture observing polarity, i.e.; green-to-ground, white-to-common, and black-to-voltage.
2. Test connections by placing lamp in fixture and plug cord into a receptacle protected by a Ground Fault Circuit Interrupter. After testing **unplug fixture**, then take one square of black sealant material and remove paper backing. Wrap sealant totally around one wire connector, pressing it around connector and wires so that they are completely watertight. Repeat for the other two (2) connectors. Carefully place sealed connectors back into the splice compartment.
3. Replace splice compartment gasket, cover and screws. Firmly tighten screws.
4. Insert spear directly into soil with fixture oriented as desired.
5. Plug cord into a receptacle protected by a Ground Fault Circuit Interrupter (GFCI).

Your Kim Portable Spear Mount is supplied with 1/2" NPSM female fixture mounting threads and 9' of 18-3 SJTW-A 3-wire cord with a plug. It may be used to mount any KIM 1/2" NPSM stem or swivel fixture that is approved for portable spear mounting. For use only with 120 volt fixtures.

J-25 Portable Spear Mount Installation Instructions

KIM LIGHTING LIMITED WARRANTY

When installed in accordance with Kim Installation Instructions and accepted trade practices, the following shall apply:

General Product Limited Warranty Coverage

All material and component parts used in the manufacture of Kim Products, are warranted to be free from defects of material and/or workmanship for a period of 1 year from date of sale, with the following exceptions:

Auxiliary Equipment

All auxiliary equipment (such as lamps, ballasts, and transformers) provided by and/or included in Kim Products shall carry the component manufacturer's warranty.

Copper and Bronze Landscape Components

Copper and Bronze Landscape fixture components shall be warranted against defects of material and/or workmanship, and failure due to corrosion for a period of 25 years from date of sale.

Composite In-Grade Components

Composite In-Grade fixture components installed below grade, shall be warranted against defects of material and/or workmanship, and failure due to corrosion, for a period of 7 years from date of sale.

Aluminum Landscape Components

Aluminum Landscape fixture components not in direct contact with soil, shall be warranted against defects of material and/or workmanship for a period of 3 years from date of sale. Aluminum fixture components in direct contact with soil shall be warranted from defects of material and failure from corrosion for a period of 1 year from date of sale.

Limit of Liability and General Conditions

Only products which are installed, used and maintained in accordance with applicable Kim instructions, specifications and accepted trade practices, are covered by the Kim Warranty. During the warranty period, with proof of purchase, Kim will repair or replace with the same or similar product, at Kim's option, without charge. Labor costs are the owner's responsibility and are excluded from this warranty. This warranty is void if the product is modified, tampered with, misapplied, poorly installed, improperly maintained, or subjected to abnormal conditions.

Repair or replacement as provided under this warranty is the exclusive remedy of the purchaser. This warranty is in lieu of all other warranties, expressed or implied, including any implied warranty of fitness for a particular application. Kim Lighting shall not be liable to the purchaser for indirect or consequential damages.



KIM LIGHTING

How may we serve you better?
Please let us know. Visit our website at:
www.kimlighting.com
Your concerns are important to us.