

LED Luminaries

LRX Emergency Battery Backup Kit
Retrofit Kit



CUSTOMER NAME _____

Project Name _____

Date _____ Type _____

Catalog Number _____

The Lumination® LRX Series EMBB Kit is a quick and easy retrofit emergency battery backup for use exclusively with the LRX family downlights equipped with the "EL" EMBB-ready option. Each kit comes ready to go with an LRX-compatible quick-disconnect to save valuable installation time. Test pushbutton for EMBB installs easily into the LRX reflector in the field without the use of tools. Simple Retrofit Solution for Emergency Downlighting.

EMBB PERFORMANCE SUMMARY

Input Voltage:	120-277v
Power Factor:	>0.9
Emergency Operation:	90 minutes
Operating Temp:	0 – 55° degrees C
THD:	<20%
Total Kit Weight:	3.75 lbs

ORDERING INFORMATION

Example: LRXR610835MD with 630lm EMERGENCY LIGHT = LRXR610835MDEL + LRXEMBBKIT07
LRXS830835MD with 900lm EMERGENCY LIGHT = LRXR830835MDEL + LRXEMBBKIT10

SKU	CAT # LOGIC TYPE	POWER	EMERGENCY MODE LUMENS	DESCRIPTION	BATTERY INFORMATION
93043031	LRXEMBBKIT07	7W	630lm	EMBB 7W kit for use with LRX***EL downlights	MFG lota P/N: ILB-CP07-R
93043540	LRXEMBBKIT10	10W	900lm	EMBB 10W kit for use with LRX***EL downlights	MFG lota P/N: ILB-CP10-R


** LXR Downlight Fixture with "EL" option Sold Separately **

CUSTOMER NAME

Project Name _____

Date _____ Type _____

Catalog Number _____

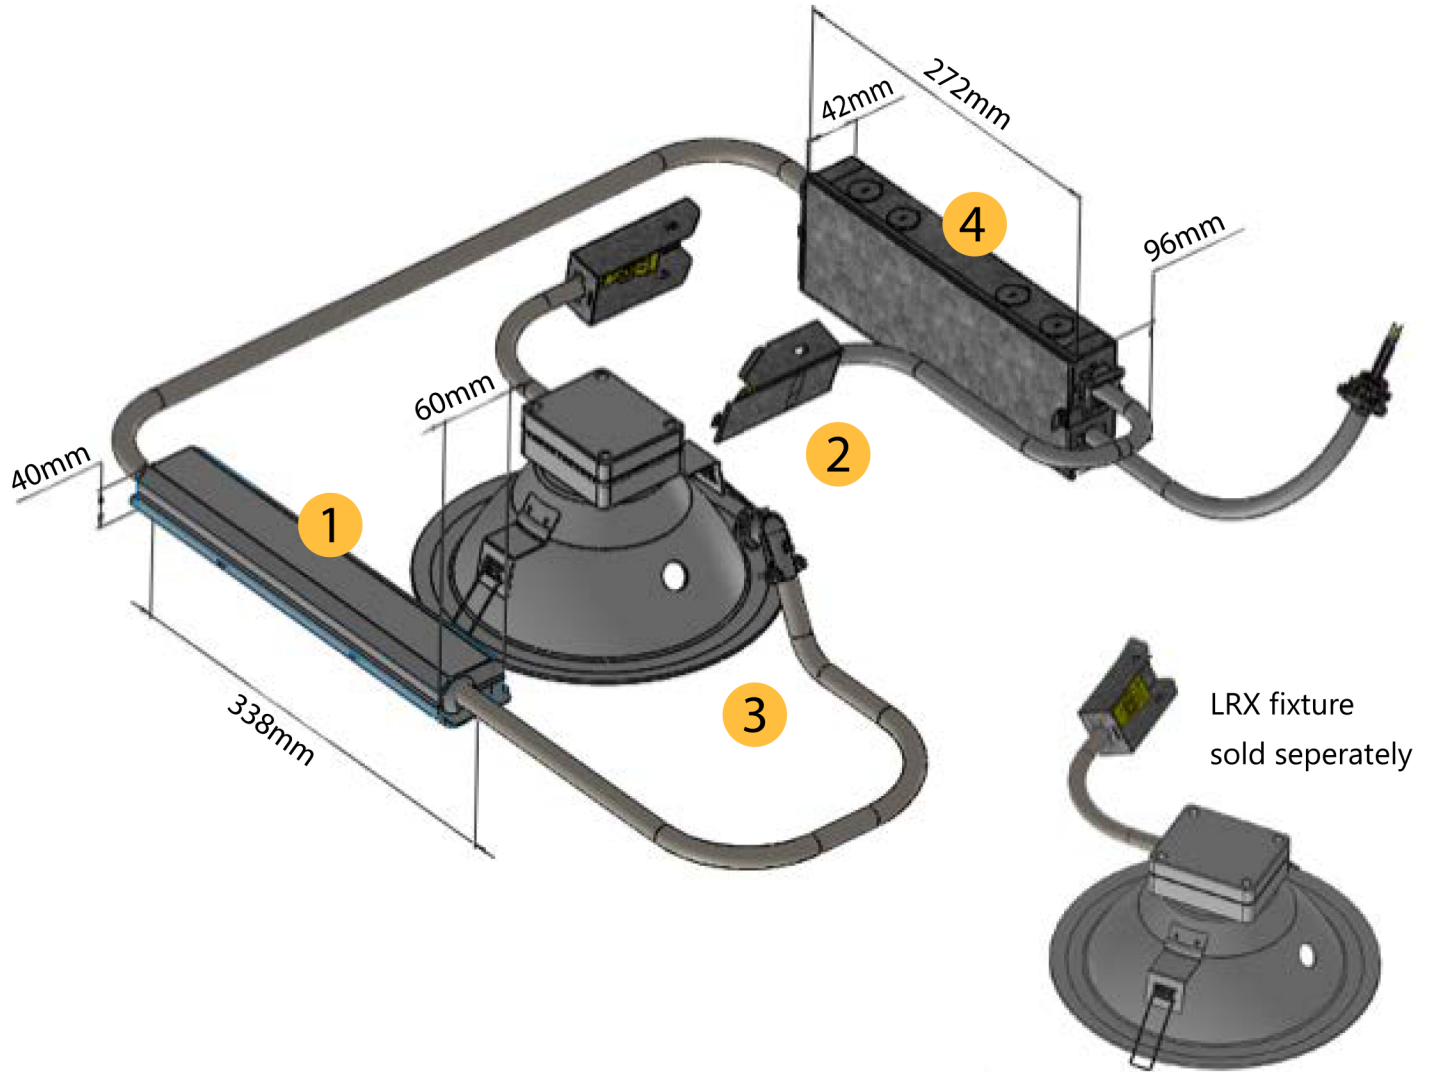

Included in the Kit:

1. Battery
2. Prewired with LRX-style Quick-Disconnect
3. Test Pushbutton Installed Integral to the Fixture in the Field
4. Junction box with EMI filter & appropriate wire connections

For Product or Technical Questions:

Email: lightingproinfo@currentlighting.com

Phone: +1 888 694 3533, option 2