



Current ®

TURF




Standard yoke mounting with single 3/4" bolt. Yoke also includes vertical aiming indicators, adjustable in 5 degree increments. Fixture is 3G vibration rated.

Lumen outputs up to 114,000 lumens and 153 LPW give superior performance to legacy products and provide additional energy savings.


Visor and Laser aiming accessories available and can be field installed.

PERFORMANCE								
Lumen Range	94,000–113,205							
Wattage Range	740							
Efficacy Range (LPW)	135–153							
Fixture Projected Life (Hours)	>60K							
Weights lbs. (kg)	54.4 (24.7)							


PHOTOMETRY



Beam Pattern	3x3 (Narrow)				
Beam Angle	19°x19°				
Lumens	99,531				
Mounting Height	60ft				



Beam Pattern	4x4 (Medium)
Beam Angle	30°x30°
Lumens	107,968
Mounting Height	60ft



Beam Pattern	5x5 (Wide)
Beam Angle	53°x53°
Lumens	113,205
Mounting Height	60ft




Integral driver with passive cooling technology. Driver housing is easily accessible and swings open to allow for access to components including driver dimming leads.





RETROFIT SOLUTION

SPORTS LIGHTER

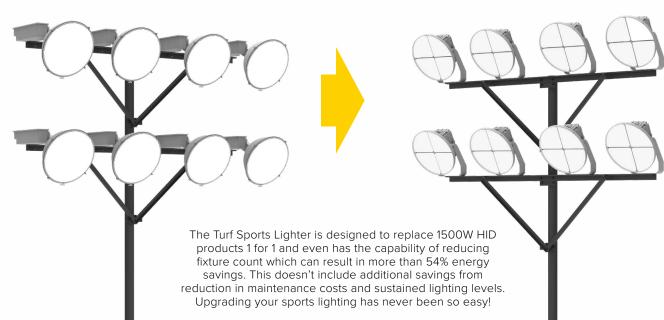


SLS TURF

	Wattage	Initial Lamp Lumens	Luminaire Lumens	Beam Lumens	EPA	Weight
SLS - Sportsliter	1500W	180,000 lumens	137,000	137,000 24,000		47-52 lbs
TSL – Turf Sportslighter	740W	N/A	100,000	35,000	2.5 EPA	55 lbs

BASEBALL TYPICAL LAYOUT:

6 POLE DESIGN



Fixture: 1500W HID Fixture Count: 46

Average Light Level: 50fc (infield) 30fc (outfield)


Total Wattage: 74,150W

					**	>• >•					
		24	28	26	$\sqrt{}$						
	21	30	27	28	43	29					
	24	31	25	32	37	36	36				
	30	35	26	28	31	36	37	35			
	32	37	35	34	31	34	28	37	36		
I	22	32	33	31	30	32	34	37	36	29	\ 🗱
	43	50	46	48	42	30	31	31	38	43	\ 1
	 ⁴³	53	62	57	49	32 32	34	28	31	27	24
	38	67	67	61	46	33	34	26	25	27	26
'	₄₉	54	67	53	49	33	36	35	31	30	23
] 37 	49	38	41	42	55	32	32	25	22	
						*					

Fixture: 740W Turf Fixture Count: 44

Average Light Level: 50fc (infield) 30fc (outfield)

Total Wattage: 32,560 W

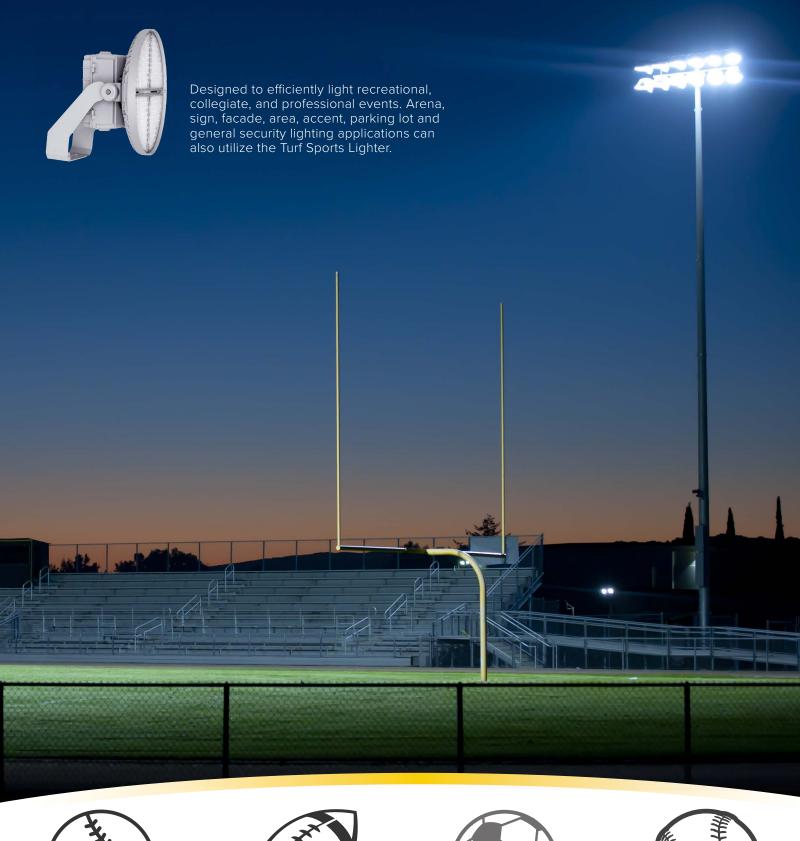









BASEBALL

FOOTBALL

SOCCER

SOFTBALL
















ORDERING GUIDE


STOCK ORDERING INFORMATION


Catalog Number	Mounting	CRI	сст	Lumens	Distribution	Wattage	Voltage	LPW	Weight	Finish
TSL-720-4K-UNV-N	Yoke	70	4000K	99,531	Narrow Flood, 3x3	740	120-277	135	54.4 lbs.	Light Grey
TSL-720-4K-UNV-M	Yoke	70	4000K	107,968	Medium Flood, 4x4	740	120-277	146	54.4 lbs.	Light Grey
TSL-720-4K-UNV-W	Yoke	70	4000K	113,205	Wide Flood, 5x5	740	120-277	153	54.4 lbs.	Light Grey
TSL-720-4K-UHV-N	Yoke	70	4000K	99,531	Narrow Flood, 3x3	740	277-480	135	54.4 lbs.	Light Grey
TSL-720-4K-UHV-M	Yoke	70	4000K	107,968	Medium Flood, 4x4	740	277-480	146	54.4 lbs.	Light Grey
TSL-720-4K-UHV-W	Yoke	70	4000K	113,205	Wide Flood, 5x5	740	277-480	153	54.4 lbs.	Light Grey

MOUNTING

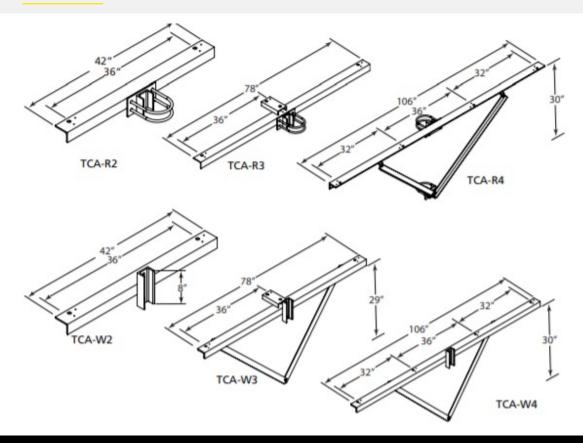


DIMENSIONS




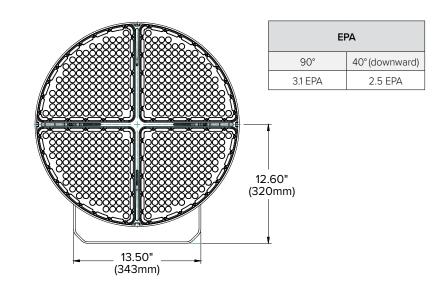


DIMENSIONS (ACCESSORIES)

VISOR VISOR-TSL SINGLE PACK / VISOR-TSL 10 PACK

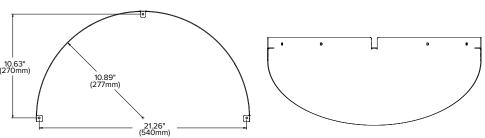



LASER AIMING LASER-TSL





SERVICES

Current provides free access to Sports Lighting Application Engineering specialists that can assist in creating a custom design for your application using proprietary software designed for field lighting. To utilize this service please email apps@currentlighting.com.



TURF Sports Lighter - 7



Current ®

Current - HLI Brands

701 Millennium Blvd. Greenville, SC 29607

currentlighting.com/beacon

© 2022 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

(Rev 10/20/22)

TURF Sportslighter brochure_R01