


NOR-3.5S

NONI 3.5" SQUARE RECESSED FAMILY

Noni™

FEATURES

- Downlight (two styles), Lensed Wall Wash (two styles), Adjustable Accent
- 1/4" overlap microflange and flangeless trims
- Cast aluminum, magnetically-attached reflectors with applied finishes
- Interchangeable primary optics for Downlight and Adjustable Accent
- Proprietary Square in Square (SS) option available
- New Construction Non-IC, IC & Chicago Plenum applications
- Up to 2200 delivered lumens @ 80 CRI 3000K
- 90 CRI (27, 30, 35, 40K); 80 CRI (30, 35K)
- Dynamic white options (18–30K Dim-to-Warm, 27–65K Tunable White)

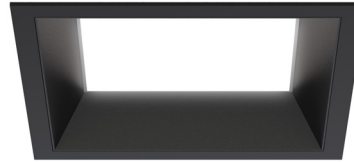

CONTROLS



SPECIFICATIONS

HOUSING CONSTRUCTION

- Formed 22GA steel housing, finished matte black. New Construction (NHN) housing thermally protected. Insulation must be 3" away from housing. New Construction IC (NHI) inherently protected for direct contact with insulation installation
- Lockable housing ceiling pan rotates 45° independent of housing position
- Removable cover plates on housing side and bottom for j-box inspection
- Downlight (DL) & Shallow Lensed Wall Wash (LWS) feature ultra shallow 2" deep housing. Integral j-box has (4) 7/8" knock-outs
- Adjustable Accent (AA) & Deep Lensed Wall Wash (LWD) utilize 3 3/8" deep housing. Integral j-box has (6) 7/8" knock outs
- Universal adjustable mounting brackets accept 0.5" EMT conduit or 1.5" or 0.75" lathing channel (by others)
- Optional Residential Mounting Bars (RMB) extend from 16–24"
- CorrectCut design is a rolled sheet metal edge which serves as a cutting guide for installers. Provides fixed cutout outer diameter which ensures reliable flange coverage and clean, finished appearance. *KV-exclusive*
- LED protection plate pre-installed from factory
- Control options require above ceiling access

TRIM CONSTRUCTION

- Reflector assembly includes reflector collar & reflector insert. Both cast aluminum, matte finish. Can be mixed/matched as desired. Insert attaches to collar via magnets. Gasket centers insert

TRIM CONSTRUCTION (CONTINUED)

- 1/4" overlap flange. Thickness measures .07"
- Ceiling thickness range 5/8"- 1 1/4". Two Downlight trim ceiling thickness options available: Shallow (DS) optimized for 5/8" ceiling (compatible up to & including 1 1/8"). Deep (DD) optimized for 1 1/4" ceiling (compatible with 1 1/4" only)
- Flangeless (FT) mud-in ring is low profile, die-cast featuring an edge to plaster up to. Ring attaches to ceiling and comes with removable protective plug installed at factory

OPTICS

- Static white fixtures feature low profile, high efficiency polycarbonate TIR primary optics for (DL) and (AA) functions
- Square in Square (SS) optic option available
- All dynamic white fixtures feature optical grade silicone lens
- Optics installed and serviceable from below through housing aperture
- Media holder included standard. Accepts 1 reflector accessory. Matte black finish, reduces visual brightness at top of trim
- Adjustable Accent (AA) lockable hot-aim 0°–40° vertical tilt, 362° horizontal rotation. Features translating center beam at finished ceiling plane (5/8")
- Two wall wash options, both optimized for 18" spacing off-wall with 2:1 spacing. LWD optic provides industry-leading horizontal uniformity near top-of-wall. LWS optic provides excellent vertical uniformity in ultra shallow housing

ELECTRICAL

- Integral LED module and driver are field serviceable from below through housing aperture
- Chip-on-board LED. 2 SDCM CCT consistency for static white options. 3 SDCM consistency for Dynamic options
- Static White and Dim to Warm LED rated life L85 @ 55,000 hours (TM-21). Tunable White LED rated life L70 @ 50,000 hours (TM-21)
- Integral solid state constant current dimming driver. 1% and Dim-to-Dark options for 0–10V, ELV and TRIAC controls. NX or Lutron Vive control options available
- Drivers are UL Class 2, inherent short circuit and overload protection. RoHS compliant

CERTIFICATIONS

- cULus certified to UL 1598
- Suitable for wet locations
- Hexcel Louver (HEX) and No Lens (NON) suitable for damp locations.
- City of Chicago Environmental Air (CCEA / CP)
- Install in environments where ambient temperature does not exceed 25°C

WARRANTY

- 5 year warranty

| KEY DATA | |
|--------------|----------------------|
| Wattages | 25, 17, 10 |
| Beam Spreads | 25, 30, 35, 50, 60 |
| SDCM | 2 |
| Rated Life | L85 @ > 55,000 Hours |

NOR-3.5S

NONI 3.5" SQUARE RECESSED FAMILY

ORDERING GUIDE

Examples: NOR-3.5SDL-NHN17-930K-MD-DM1NU/NOR-3.5SDS-TRM-FWHS-RBL-SOL

CATALOG #

HOUSING

| NOR-3.5S | | Housing | | Output | CRI/CCT | Beam Spread ⁵ | |
|--|-----------------------------------|---------------------------|--------------------------|-----------------------------------|---|---|------------|
| Series | Function | Housing | | | | | |
| NOR-3.5S Noni Recessed 3.5" Square | Shallow Housing (2" Depth) | NHN | New Construction, Non-IC | 10 10 Watt | Static 927K 90 CRI, 2700K 930K 90 CRI, 3000K 935K 90 CRI, 3500K 940K 90 CRI, 4000K 830K 80 CRI, 3000K 835K 80 CRI, 3500K Dynamic 1830DT 90 CRI, 1800K-3000K Dim-to-Warm ^{1,2,3} 2765T 90 CRI, 2700K-6500K SpectraSync™ Tunable White ^{1,2,3,4} | VN Very Narrow (.38 SC / 25°) NR Narrow (.48 SC / 30°) MD Medium (.58 SC / 35°) WD Wide (.84 SC / 50°) SS Square in Square (.90 SC / 60°) LW Lensed Wall Wash ⁷ | |
| | DL | Downlight | NHI | New Construction, IC ¹ | | | 17 17 Watt |
| | LWS | Lensed Wall Wash, Shallow | CP | Chicago Plenum ¹ | | | 25 25 Watt |
| | Shallow Housing (3" Depth) | | | | | | |
| | LWD | Lensed Wall Wash, Deep | | | | | |
| | AA | Adjustable Accent | | | | | |

| Dimming | Controls ¹³ | U | Accessories |
|---|--|--------------------------------|-------------------------------|
| | | Voltage | |
| DM1 0-10V 1% ^{8,14,15} | N None | U Universal Voltage (120-277V) | RMB Residential Mounting Bars |
| PDM ELV, TRIAC 1% ^{8,14} | LV Lutron Vive 0-10V (120-277V) | | |
| ERP 0-10V, ELV, TRIAC Dim-to-Dark ^{8,15} | LVE Lutron Vive EcoSystem (120V Only) | | |
| PEQOE Lutron Hi-Lume Premier 0.1% | NXE NX Dual RJ45 SmartPORTS, without Sensor ¹⁵ | | |
| SpectraSync | NXW NX Networked Wireless Radio Module NXR2M and Bluetooth Programming, without Sensor ¹⁵ | | |
| DMT 0-10V 5% ⁴ | | | |

TRIM

| NOR-3.5S | | TRM | Reflector Flange Color | Reflector Insert Color | Lens | |
|--|-----------------------------------|----------|---------------------------------------|------------------------|--|----------------------|
| Series | Function | Trim | | | | |
| NOR-3.5S Noni Recessed 3.5" Square | Shallow Housing Compatible | TRM Trim | Flanged | Texture | SOL Solite ⁹ CLR Clear ⁹ FRS Frosted ¹⁰ LIN Linear Spread (10 x 40°) ^{9,11} HEX Hexcel Louver ^{9,12} NON No Lens ^{9,11} | |
| | DS | | Downlight, Shallow (%-1 1/2" ceiling) | FWHS | | White |
| | DD | | Downlight, Deep (1 1/4" ceiling only) | FGYS | | Gray |
| | LWS | | Lensed Wall Wash, Shallow | FBLS | | Black |
| | Deep Housing Compatible | | FCOS | Copper | | |
| | LWD | | Lensed Wall Wash, Deep | FAMW | | Anti-Microbial White |
| | AA | | Adjustable Accent | FX | | Custom Finish |
| | | | Flangeless | | | |
| | | | FT | Flangeless | | |
| | | | | Smooth | | |
| | | | RWHS | White | | |
| | | | RGYS | Gray | | |
| | | | RBLS | Black | | |
| | | | RCOS | Copper | | |
| | | | RAMW | Anti-Microbial White | | |
| | | | Other | | | |
| | | | RX | Custom Finish | | |

- Notes:
- 1 Available in 10 or 17 watt outputs
 - 2 NHN available up to 17 watts. NHI available as 10 watts
 - 3 Available with NR or LW optic only
 - 4 DMT driver must be selected for use with 2765T
 - 5 DL and AA performance based on SOL lens with RWHS insert finish
 - 6 Available only with FRS lens
 - 7 Available only when LW functions selected
 - 8 Not available with LVE control
 - 9 Not available with LW function
 - 10 Available with all functions. Must be selected with LW
 - 11 Available with DS only
 - 12 Wet location not suitable for HEX or NON
 - 13 Above ceiling access required
 - 14 Only available in 17 or 25 watt outputs
 - 15 DM1 or ERP required with NX options

NOR-3.5S

NONI 3.5" SQUARE RECESSED FAMILY

PERFORMANCE DATA

Performance data provided below based on 80 CRI, 3000K with White reflector and Solite lens. Extra Wide (XW) and Lensed Wall Wash (LWS, LWD) performance includes White reflector and Frosted lens.

| Output | Beam Spread | Beam | Delivered Lumens | Efficacy | Spacing Criterion | Candela @ 0° |
|---------|-----------------------|-------|------------------|----------|-------------------|--------------|
| 25 Watt | Very Narrow (VN) | 25x25 | 2199 | 87 | 0.38 | 10547 |
| | Narrow (NR) | 30x30 | 2112 | 83 | 0.48 | 6993 |
| | Medium (MD) | 35x35 | 1989 | 79 | 0.58 | 4698 |
| | Wide (WD) | 50x50 | 2096 | 83 | 0.84 | 2730 |
| | Square in Square (SS) | 60x60 | 1280 | 51 | 0.90 | 912 |
| 17 Watt | Very Narrow (VN) | 25x25 | 1660 | 96 | 0.38 | 7963 |
| | Narrow (NR) | 30x30 | 1595 | 92 | 0.48 | 5279 |
| | Medium (MD) | 35x35 | 1501 | 87 | 0.58 | 3547 |
| | Wide (WD) | 50x50 | 1582 | 91 | 0.84 | 2061 |
| | Square in Square (SS) | 60x60 | 967 | 56 | 0.90 | 689 |
| 10 Watt | Very Narrow (VN) | 25x25 | 1031 | 101 | 0.38 | 4947 |
| | Narrow (NR) | 30x30 | 991 | 97 | 0.48 | 3280 |
| | Medium (MD) | 35x35 | 933 | 91 | 0.58 | 2204 |
| | Wide (WD) | 50x50 | 983 | 96 | 0.84 | 1280 |
| | Square in Square (SS) | 60x60 | 600 | 59 | 0.90 | 428 |

| Output | | Delivered Lumens | Efficacy | Max Candela |
|---------|--------------------------|------------------|----------|-------------|
| 25 Watt | Wall Wash, Shallow (LWS) | 1330 | 53 | 524 |
| | Wall Wash, Deep (LWD) | 1490 | 59 | 832 |
| 17 Watt | Wall Wash, Shallow (LWS) | 1004 | 58 | 398 |
| | Wall Wash, Deep (LWD) | 1125 | 65 | 632 |
| 10 Watt | Wall Wash, Shallow (LWS) | 624 | 61 | 247 |
| | Wall Wash, Deep (LWD) | 699 | 68 | 392 |

NOR-3.5S

NONI 3.5" SQUARE RECESSED FAMILY

MULTIPLIER TABLE

| | | | | | | | | | | | |
|----------|---------|---------|---------|------|------|------|-----------------------------------|-------|-------|------|------|
| CRI, CCT | 927 | 930 | 935 | 940 | 830 | 835 | 1830TD | 2765T | | | |
| | 0.83 | 0.86 | 0.87 | 0.87 | 1.0 | 1.02 | 0.46 | 0.55* | | | |
| Media | SOL | CLR | LIN | HEX | FRS | NON | *Multiplier value based on 4600K. | | | | |
| | 1.0 | 1.02 | 0.95 | 0.76 | 0.78 | 1.12 | | | | | |
| Output | 10 Watt | 17 Watt | 25 Watt | | | | | | | | |
| | 0.47 | 0.76 | 1.0 | | | | | | | | |
| Finishes | RWH | RGY | RBL | RGT | RPP | RGH | RWHS | RGYS | RGBLS | RCOS | RAMW |
| | 1.0 | 0.9 | 0.85 | 0.85 | 0.8 | 0.8 | 1.02 | 0.95 | 0.9 | 0.8 | 1.05 |


ELECTRICAL DATA

| | DM1 | PDM | ERP | PEQ0E | DMT |
|--|--|--|---|-----------------------------|--|
| Dimming Protocols Supported | 0–10V | ELV, TRIAC | 0–10V, ELV, TRIAC | Lutron Hi-Lume Premier 0.1% | 0–10V |
| Input Voltage | 120–277V | 120–277V | 120–277V | 120–277V | 120–277V |
| Input Frequency | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz |
| Dim Level | 20W <1% 17W <5% | 1% | 1% Dim-to-Dark | 0.1% Dim-to-Dark | 17W <5% |
| Power Factor (PF) | ≥0.90 | ≥0.90 | ≥0.90 | 0.95 Typical | ≥0.90 |
| Total Harmonic Distortion (THD) | <20% | <20% | <20% | 15% Typical | <20% |
| Inrush Current | NEMA 410 Limit | NEMA 410 Limit | NEMA 410 Limit | NEMA 410 Limit | NEMA 410 Limit |
| Electromagnetic Interference (EMI) Filtering | FCC CFR Title 47 Part 15 Class B | FCC CFR Title 47 Part 15 Class B | FCC CFR Title 47 Part 15 Class B at 120Vac, Class A at 277Vac | Contact Lutron | FCC CFR Title 47 Part 15 Class B |
| Transient Surge Protection | IEEE C62.411-2002 & C62.41.2-2002 Category A | IEEE C62.411-2002 & C62.41.2-2002 Category A | IEEE C62.411-2002 & C62.41.2-2002 Category A | Contact Lutron | IEEE C62.411-2002 & C62.41.2-2002 Category A |

NOR-3.5S


NONI 3.5" SQUARE RECESSED FAMILY

DIMENSIONS

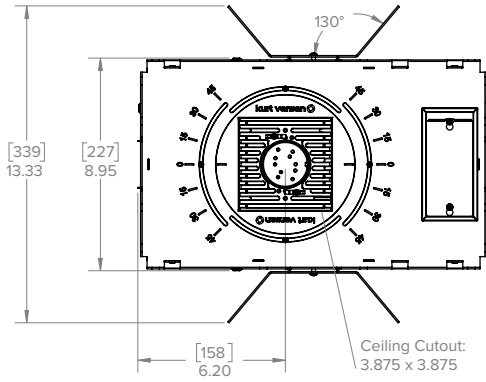


Housing


Shallow Housing
(DL, LWS)

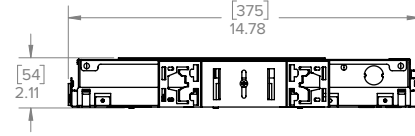


Deep Housing
(LWD, AA)

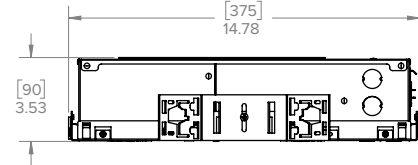


Flange




Flangeless
(FT)

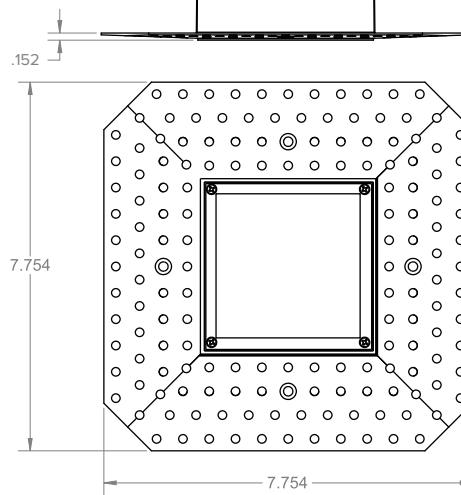


Flangeless (FT) with
Downlight, Shallow (DS)

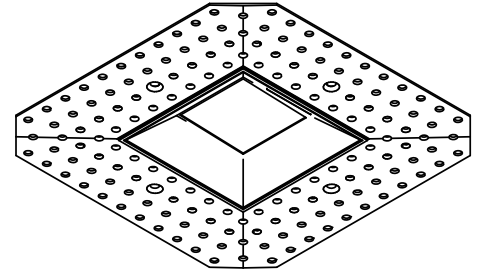




Reflector Collar

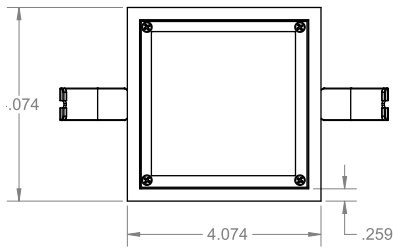

Lensed Wall Wash
Deep (LWD)



Adjustable
(AA)



NOR-3.5S Bottom View
Reflector Insert