



CUSTOMER NAME \_\_\_\_\_

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

## PVR Series

### 2x2 & 2x4 Proline® Volumetric T-Grid

The Lumination® PVR series is an LED contractor grade luminaire with a three-dimensional volumetric design for those with first cost needs. For total cost of ownership requirements consider our LVR Series. PVR offers even lower installation costs with switchable lumens and CCT, so there is no need to decide the specific product until it is at the job-site. Suitable for indoor general lighting on retrofit solutions.

## CONSTRUCTION

<b>Housing:</b>	Durable, long lasting post painted steel construction
<b>Lens:</b>	Precision formed optical assembly
<b>Paint:</b>	Post painted powder coat finish
<b>Weight:</b>	<10 pounds

## OPTICAL SYSTEM

<b>Lumens:</b>	2x2 2700/4200/4950 lumens (Field Switchable) 2x4 2700/4200/4950 lumens (Field Switchable)
<b>Wattage:</b>	2x2 20/32/38 (Field Switchable) 2x4 20/32/38 (Field Switchable)
<b>Efficacy:</b>	2x2 Up to 138 LPW 2x4 Up to 143 LPW
<b>CCT:</b>	3500K/4000K/5000K (Field Switchable)
<b>CRI:</b>	80+, R9>0

## ELECTRICAL

<b>Input Voltage:</b>	120-277V, 347V
<b>Input Frequency:</b>	50/60Hz
<b>Standard Dimming Control:</b>	0-10V, Dimming
<b>Power Factor (PF)*:</b>	> 0.9%
<b>Total Harmonic Distortion (THD)*:</b>	<20%

\* PF and THD may vary with options

## CONTROLS

<b>Dimming:</b>	Standard - 0-10V, Dimming
<b>Sensors:</b>	Daintree® Wireless, with High-end Trim <small>(Only EZ Connect is available, see ordering information for additional info)</small>
<b>DLC 5.1 LLLC:</b>	Integrated/embedded networked lighting control, luminaire-level lighting control (LLLC)

## AMBIENT TEMPERATURE

TYPE	TEMPERATURE RATE
OPERATING TEMPERATURE	0°C TO +30° C
STORAGE TEMPERATURE	-40°C TO +70°C

## LUMEN MAINTENANCE

LXX(10K) @ Hours 50,000 HR
L70

## MOUNTING

- **Typical Mounting:** Fits standard T-Bar grid (drop ceilings) existing fixture back boxes

## DESIGN LIFE & WARRANTY

- Insulation Contact: Type IC Rated
- Damp Location rated
- UL/cUL Certified
- RoHS compliant
- ANSI C82.77 Compliant
- Current's Limited 5-year Warranty: Please see website.



### CUSTOMER NAME

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

### Ordering Information:

**PVR**    **A**    **X**    **4X**    **MM**    **8XX**    **RM**    **WHITE**

---    --    -    --    --    ---    --    ---    ---

FAMILY	FIXTURE TYPE	GENERATION	VOLTAGE	NOMINAL LUMENS	DISTRIBUTION	CRI/CCT	CONTROLS <sup>2</sup>	MOUNTING	FINISH	OPTIONS
<b>PVR</b> = Volumetric Retrofit	<b>22</b> = 2' x 2' <b>24</b> = 2' x 4'	<b>A</b> = 1 <sup>st</sup> Generation	<b>0</b> = 120-277V <b>D<sup>3</sup></b> = 347V	<b>4X</b> = Nominal Lumen Level (middle is default)	<b>MM</b> = Med. Lambertain Curved Diffuser	<b>8</b> =80 CRI <b>3500/4000/5000K</b> <b>Switchable</b> (4000K is default)	<b>VQ</b> = 0-10V Dimming <b>TT<sup>2</sup></b> = Daintree EZ Connect (fixture integrated sensor)	<b>RM</b> = Refit Mounting	<b>WHITE</b> = White	<b>(blank)</b> = None <b>EL<sup>1</sup></b> = Emergency Battery

### ORDERING NOTES:

1. Test switch is remote mounted in the ceiling, EL option not available in 347V
2. TT option is not available in 347V
3. D option is 3W higher


EXAMPLE CONFIGURATIONS	LUMINAIRE LUMENS (SWITCHABLE <sup>3</sup> )	LUMINAIRE TOTAL SYSTEM WATTS	LPW
PVR22A04XMM8XXVQRMWHITE	2700/4200/5000	20/32/38	135/131/132
PVR24A04XMM8XXVQRMWHITE	2800/4400/5200	20/32/38	140/138/137

NOTE: Above values are based on the default switch setting for CCT (4000K). For detailed ratings at other CCT/wattages, please see following page.

**Photometric Data**
**PVR 2X2/2X4 SERIES**

ZONAL LUMEN SUMMARY	
ZONE	LUMENS
0-10°	147.4
10-20°	424.2
20-30°	649.2
30-40°	795.1
40-50°	845.6
50-60°	800.9
60-70°	670.0
70-80°	456.1
80-90°	156.2
90-100°	1.0
100-110°	0.7
110-120°	0.6
120-130°	0.6
130-140°	0.6
140-150°	0.6
150-160°	0.6
160-170°	0.4
170-180°	0.1


ZONAL LUMEN SUMMARY			
ZONE	LUMENS	% OF LAMP	% OF FIXTURE
0-20	572	N.A.	11.5
0-30	1221	N.A.	24.7
0-40	2016	N.A.	40.7
0-60	3662	N.A.	74
0-80	4788	N.A.	96.7
0-90	4945	N.A.	99.9
10-90	4797	N.A.	96.9
20-40	1444	N.A.	29.2
20-50	2290	N.A.	46.3
40-70	2317	N.A.	46.8
60-80	1126	N.A.	22.7
70-80	456	N.A.	9.2
80-90	156	N.A.	3.2
90-110	2	N.A.	0
90-120	2	N.A.	0
90-130	3	N.A.	0.1
90-150	4	N.A.	0.1
90-180	5	N.A.	0.1
110-180	4	N.A.	0.1
0-180	4950	N.A.	100

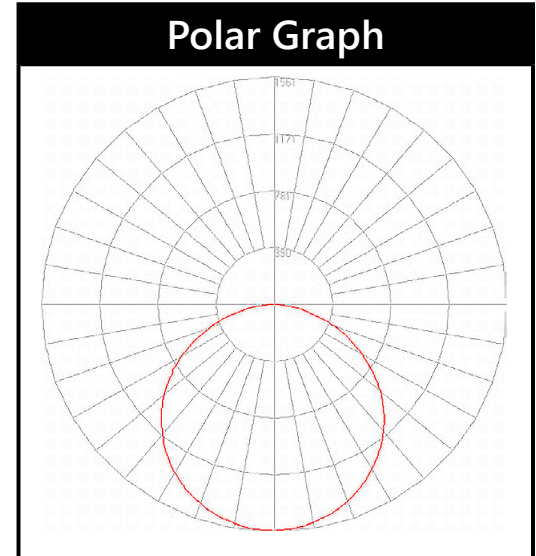
**LPW VALUES AT ALL SETTINGS**


FIXTURE TYPE	WATTAGE	3500K LUMENS/LPW	4000K LUMENS/LPW	5000K LUMENS/LPW
22	20	2600/130	2700/135	2750/138
	32	4000/125	4200/131	4200/131
	38	4700/124	5000/132	5000/132
24	20	2700/135	2800/140	2850/143
	32	4200/131	4400/138	4400/138
	38	4900/129	5200/137	5200/137

### Dimensions

#### PVR 2X2 SERIES

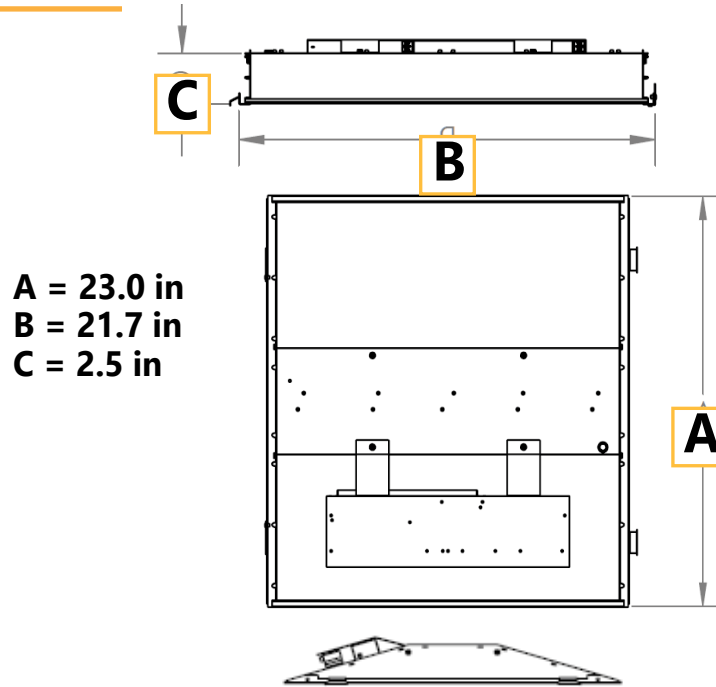

#### PVR 2X4 SERIES

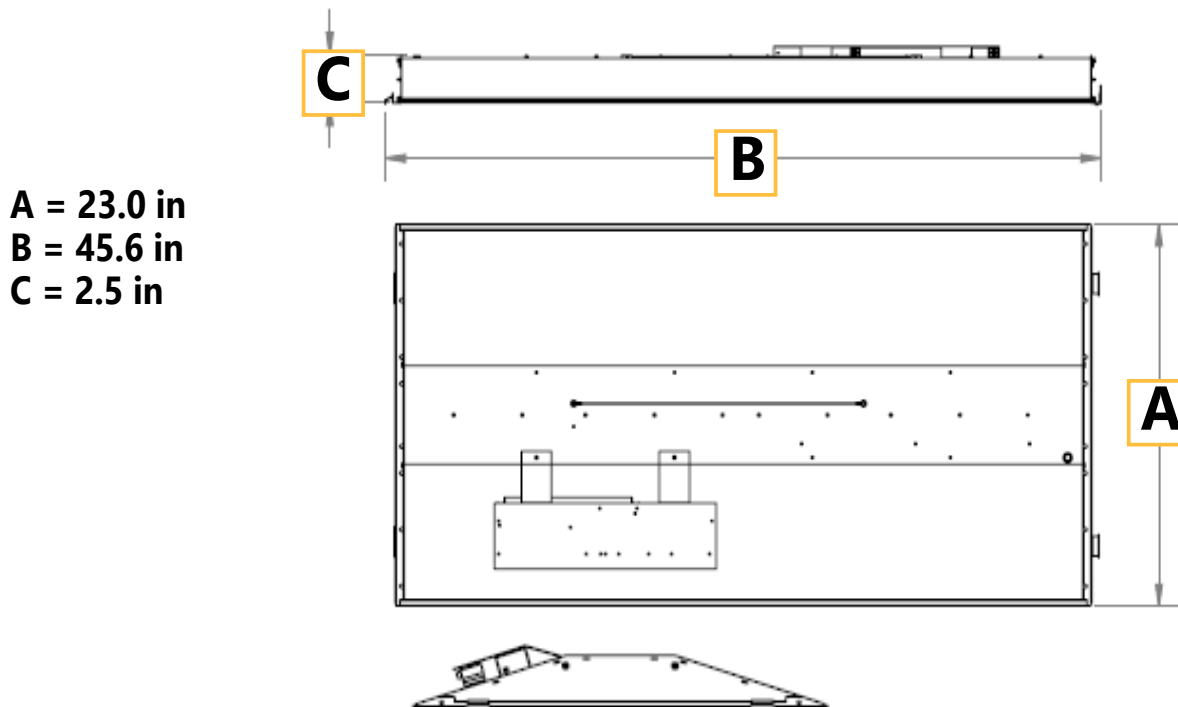

## CUSTOMER NAME

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

## Options

### DAINTREE CONTROLS

---

**Daintree® Wireless Controls:**

There is no one size fits all for wireless controls. Some networks want simple solutions that reduce energy consumption and meet code compliance while others are more ambitious, looking to capitalize on the LED and controls savings to fund a scalable, enterprise-grade, internet of things solution. The advantage of the Daintree® Wireless platform is it's ability to integrate into indoor, outdoor and high bay environments. The Daintree® Wireless Controls provide the infrastructure to future proof your buildings, easily upgrade to Networked solutions and provide the ability to integrate into IoT solutions that are right for your business.

- **Daintree® One:** Standalone Wireless Controls
- **Daintree® EZ Connect:** Room-Based Wireless Lighting Controls
- **Daintree® Networked:** Networked Lighting Controls for Smart Building & IoT Enablement.

**Note:** For networked solutions, use the LVT/LVR series products.

Daintree® Wireless Controls are already integrated in your favorite Current LED fixtures. Integrating the controls into the fixture cuts labor costs considerably since the sensors are already embedded in the lighting fixtures. There's no need to get above the ceiling plenum and install additional devices. Visit our website [LED.com](http://LED.com) for a complete list of LED Fixtures.