

LFR-4RW

LITEFRAME 4" ROUND LENSED WALL WASH

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

FEATURES

- 4" LED lensed wall wash delivering 1000–6000 lumens
- Direct Install from below ceiling for New Construction or Remodel applications
- Optional housing accessories available
- Provides smooth, uniform illumination
- 2700K–5000K, 80+ and 90+ CRI (2 SDCM)
- Dimming protocols include 0–10V, Phase (Forward/Reverse), DALI, DMX, and Lutron EcoSystem
- NX Lighting Controls wired and wireless controls capability available



CONTROLS TECHNOLOGY



SPECIFICATIONS

CONSTRUCTION

- Standard Fixture Module designed for Non-IC, Direct Install construction
- Optional Non-IC frame or IC housing available with pre-installed bar hangers
- Die cast aluminum fixture module support ring with spring steel clips for secure mounting to ceiling
- Driver J-Box can be installed and accessed from below the ceiling as direct install or easily snap on to optional housing frame/enclosure
- Light Engine connections use plenum rated (CMP) cable

OPTICS

- Tempered Glass Lens Standard
- Provides uniform light distribution down the wall
- High purity spun aluminum reflector, self-flanged
- Specular or Semi-Specular anodized or White painted cone reflector finish/colors
- Painted flange options in White or Black

ELECTRICAL

- Chip-on-board LED with 2 SDCM
- Multiple CCTs, 80+ or 90+ CRI
- Long LED life: L90 at >50,000 hours (TM-21)
- Universal voltage 120–277V driver, 347V optional
- UL Class 2, inherent short circuit and overload protection
- Flicker-free dimming options in a wide range of protocols from 1% to <0.1% performance
- 0–10V, Phase (Forward/Reverse), DALI, DMX, and Lutron EcoSystem options
- NX Lighting Controls provides options for standalone and networked functionality with wired or wireless connectivity for NX system deployments
- Remote emergency battery option available

INSTALLATION


- Accommodates ceiling thickness from 0.50" to 1.25"
- Fixture Module including driver fully accessible from above or below the ceiling
- 10L Fixture Modules are inherently protected IC without the use of IC housing enclosure. (IC housing is still recommended when using loose-fill or spray foam insulation types.)

LITEFRAME[®]
2.0



SERVICE PROGRAMS

STOCK QS10



Typical Dimensions and Weights			
Lumen Package	"A" Diameter Inches (mm)	"B" Height Inches (mm)	Weight lbs (kg)
10L - 30L	5.37 (136)	4.81 (122)	3.9 (1.8)
35L - 60L	5.37 (136)	6.29 (160)	4.1 (1.9)

See DIMENSIONS section for complete details

CERTIFICATIONS

- cCSAus certified to UL 1598
- For ≥50L: Marked spacing required 36" fixture center to center; 18" fixture center to building member; 0.5" above fixture
- IP65 rated (room side) when properly installed per installation instructions
- Suitable for wet locations, covered ceiling
- EMR: Certified under UL 924 standard for emergency lighting and power equipment
- EMR: Emergency battery packs are California Energy Commission (CEC) Title 20 Compliant
- Approved for 8 (4 in/4 out) No. 12AWG conductors rated for 90°C through wiring

WARRANTY

- 5 year warranty

KEY DATA	
Lumen Range	1000–6000
Wattage Range	8–54
Efficacy Range (LPW)	91–108
Reported Life (Hours)	L90 / >50,000
Input Current (mA)	66–450 (120V)

*Based on Specular, 35K, 80 CRI

LFR-4RW

LITEFRAME 4" ROUND LENSED WALL WASH

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

ORDERING GUIDE

Example: LFR-4RW-M-10L35K8-LWW-DM1 / LFR-4RW-T-LWW-S / LFR-4RD-H

CATALOG #	
-----------	--

FIXTURE MODULE

LFR-4RW-M								
Ap/Shp/Funct	Lumen Output	CCT	CRI	Distribution	Driver Options	Control Options	Voltage	Module Options
LFR-4RW-M 4" Round Lensed Wall Wash Fixture Module for Direct Install <i>(Non-IC frame or IC housing available under Housing Options below)</i>	10L 1000	27K 2700K	8 80+	LWW Lensed Wall Wash	DM1 0-10V Dimming to 1%	NX Lighting Controls	<i>Standard 120-277V</i> 34 347V⁴	CP Chicago Plenum ^{5,6}
	15L 1500	30K 3000K	9 90+		DM01 0-10V Dimming to < 1% ²	Networked Wireless		EMR 6W Emergency Battery Pack (CEC Title 20 Compliant) with remote test switch and indicator light ⁶
	20L 2000	35K 3500K			PDM Phase (Forward/ Reverse) Dimming to 1% ²	NXW NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor ³		DTS Device Transfer Switch with Dimming Bypass ^{6,7}
	25L 2500	40K 4000K			DMX DMX with RDM dimming to < 0.1% ²	Networked Wired		
	30L 3000	50K 5000K			DALI DALI Dimming to 1% ²	NXE NX Wired Dual RJ45 SmartPORTS, without Sensor ³		
	35L 3500				EDM Lutron Hi-Lume EcoSystem Dimming to 1% ²			
	40L 4000							
	50L 5000 ¹							
	60L 6000 ¹							

TRIM (Ships separately)

LFR-4RW-T				
Aperture/Shape/Function	Distribution	Reflector Finish/Color	Flange Color Options	Lower Trim Options
LFR-4RW-T 4" Round Lensed Wall Wash Trim Assembly	LWW Lensed Wall Wash	S Specular SS Semi-Specular WC Painted White Cone and Flange	<i>Standard matches reflector color</i> WT White Flange ⁸ BT Black Flange	FM Flush Mount Mud-In Ring ¹¹

HOUSING OPTIONS (Ships separately)

Aperture/Shape/Function
<input type="checkbox"/> LFR-4RD-H 4" Housing Frame, New Construction, Non-IC
<input type="checkbox"/> LFR-4RD-H-IC 4" Housing Enclosure, New Construction, IC Rated ^{9,10}

Accessories

- ☐ **LiteGear** LiteGear® Inverter, 125VA-250VA
- ☐ **LPS Series** LightPower Micro-Inverter, 20VA-55VA
- ☐ **LF-FMR4-R** Flush Mount Mud-in Ring, 4" ¹¹
- ☐ **LF-MOR4-R-WH** Metal Oversized Ring, 4" Round, White (8.3" outside diameter)

Notes:

- 50L and 60L require marked spacing. See line art for more details.
- DM01, PDM, DMX, DALI available up to 50L. EDM available 15L-40L.
- NX requires DM1 driver option.
- 347V requires DM1 driver option; available 10L-40L; not available with Controls, DTS, EMR.
- CP not available with PDM, DMX, or Controls.
- Module options not available in combination.
- DTS available with DM1, DM01 or DALI.
- WT not needed for WC.
- IC available up to 35L; 10L Fixture Modules are inherently protected IC without the use of IC housing enclosure. (IC housing is still recommended when using loose-fill or spray foam insulation types.)
- IC Housing not for use in combination with Controls or with Module Options CP, EMR, DTS.
- Flush Mount Flange (FM) requires FMR accessory (sold separately).

LFR-4RW

LITEFRAME 4" ROUND LENSED WALL WASH

DATE:



LOCATION:

TYPE:

PROJECT:

CATALOG #:

NX LIGHTING CONTROLS

Control Option Ordering Logic & Description			Control Option Functionality								Control Option Components	
			Networkable	Grouping	Scheduling	Occupancy/Motion	Daylight Harvesting	0-10V Dimming	On/Off Control	Bluetooth App Programming		
NX Wireless	NXW	NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor	✓	✓	✓	-	-	✓	✓	✓		NXRM2-H
NX Wired	NXE	NX Wired Dual RJ45 SmartPORTS, without Sensor	✓	✓	✓	-	-	✓	✓	✓ ¹		NXDSP

1 Requires NXBTC, order separately.

NX LIGHTING CONTROLS APP



The NX Lighting Controls App is a free to use mobile application for programming both an NX Lighting Controls System or Standalone Bluetooth Sensors. The mobile app allows you to configure devices, discover and setup wireless enabled luminaires and program your NX system settings.



Android



Apple iOS

PERFORMANCE DATA TABLE

Performance data provided below is for 3500K, 80 CRI with Specular Clear reflector

Lumen Package	Nominal Lumens	Distribution	Delivered Lumens	Watts	LPW
10L	1000	Lensed WW	821	7.6	108
15L	1500		1233	11.8	104
20L	2000		1591	15.3	104
25L	2500		2066	20.9	99
30L	3000		2463	26.0	95
35L	3500		2994	29.4	102
40L	4000		3338	32.9	101
50L	5000		4061	42.0	97
60L	6000		4844	53.4	91

LFR-4RW


LITEFRAME 4" ROUND LENSED WALL WASH

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

DIMENSIONS

LFR-4RW-M

Fixture Module consists of Light Engine and Driver J-Box assemblies.
Overall dimensions for each are dependent upon configuration selected.
See the following pages for details.

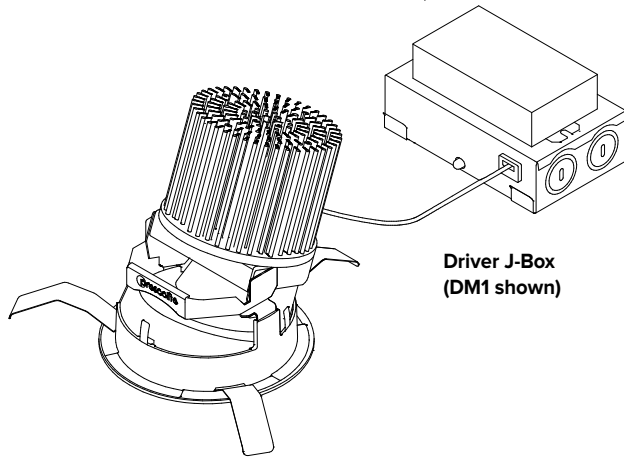


DIMENSIONAL DATA		
APERTURE		Ø4.00" (101.6mm)
OVERALL		Ø5.37" (136.5mm)
FLANGE WIDTH	Standard	0.69" (17.5mm)
	Flush Mount	0.19" (4.8mm)
FLANGE TO FLANGE	Standard	Ø5.37" (136.6mm)
	Flush Mount	Ø4.38" (111.2mm)
CEILING CUTOUT	Standard	Ø4.75" (120.7mm)
	Flush Mount	Ø4.88" (123.9mm)
CEILING THICKNESS		0.50"–1.25" (12.7–31.75mm)


LFR-4RW LIGHT ENGINE

OVERALL LIGHT ENGINE HEIGHT "A" *		
LUMEN PACKAGE	FIXTURE MODULE	BEAM DISTRIBUTION
		LWW
10L–30L	STANDARD	4.81" (122.2mm)
	CP	7.28" (184.9mm)
35L–60L	STANDARD	6.29" (159.8mm)
	CP	7.28" (184.9mm)

* Note: Add ½" minimum plenum clearance above overall Light Engine Height.
** For ≥50L: Marked spacing required 18" fixture center to center;
18" fixture center to building member; 0.5" above fixture.
*** Non-IC rating requires 3" from insulation and combustible materials.

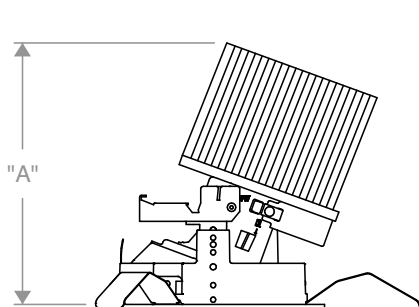

Side View Standard

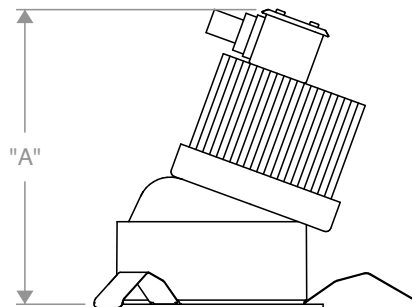

Side View CP – Chicago Plenum

LFR-4RW

LITEFRAME 4" ROUND LENSED WALL WASH

DATE:

LOCATION:


TYPE:

PROJECT:


CATALOG #:

DIMENSIONS CONTINUED


DRIVER J-BOX

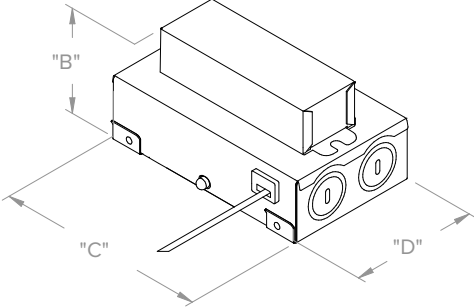


DM1 / DM01 / PDM / DALI

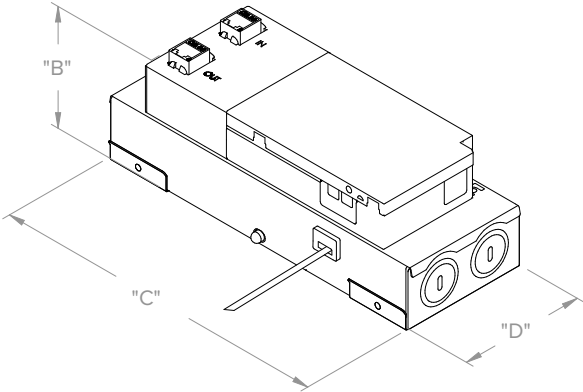


DMX

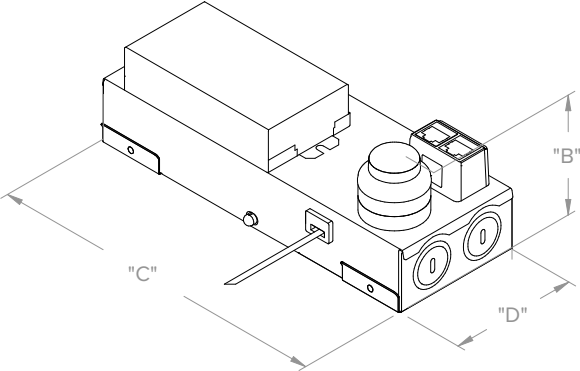

NX CONTROLS OPTION

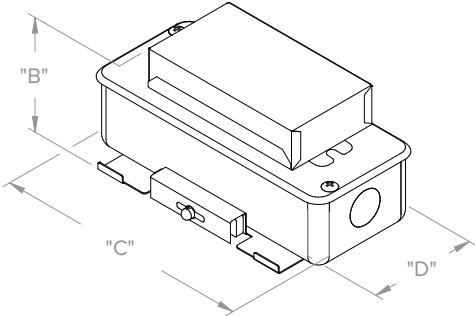

CP

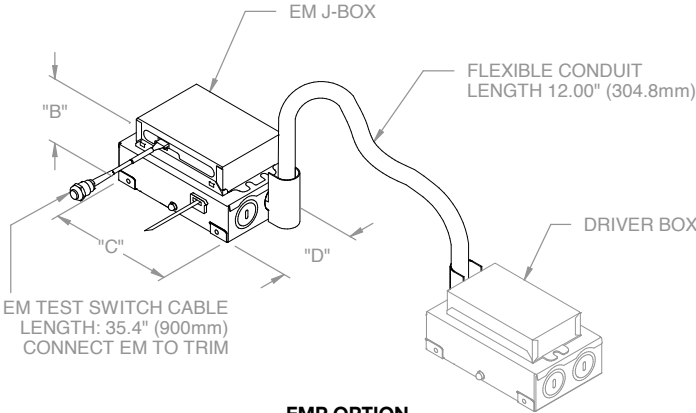

EMR OPTION

EM/Driver J-Box Conduit (provided) connects to Driver J-Box (see Driver J-Box for additional details)







OVERALL DRIVER J-BOX DIMENSIONS (ALL LUMEN OUTPUTS)				
DRIVER/ CONTROLS /OPTIONS	"B" (HEIGHT)	"C" (LENGTH)	"D" (WIDTH)	MINIMUM J-BOX PLENUM CLEARANCE
DM1 / DM01 / PDM / DALI	2.67" (67.8mm)	5.34" (135.6mm)	3.23" (82.0mm)	3.50" (88.9mm)
DMX	3.07" (78.0mm)	8.68" (220.5mm)	3.23" (82.0mm)	5.00" (127.0mm)
NX	3.02" (76.7mm)	8.68" (220.5mm)	3.23" (82.0mm)	6.00" (152.4mm)
EMR	2.73" (69.3mm)	5.34" (135.6mm)	3.23" (82.0mm)	4.00" (101.6mm)
CP	1.89" (73.4mm)	6.50" (165.1mm)	2.72" (69.1mm)	5.00" (127mm)

LFR-4RW

LITEFRAME 4" ROUND LENSED WALL WASH


DIMENSIONS CONTINUED

OPTIONAL HOUSINGS

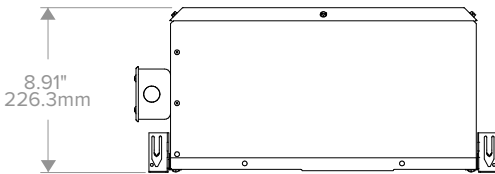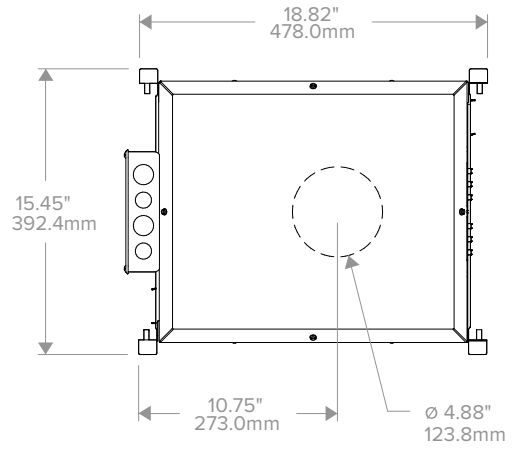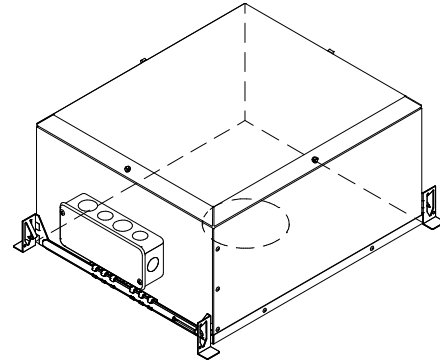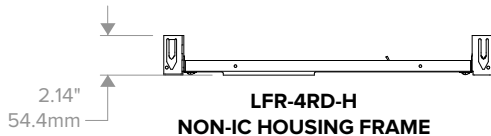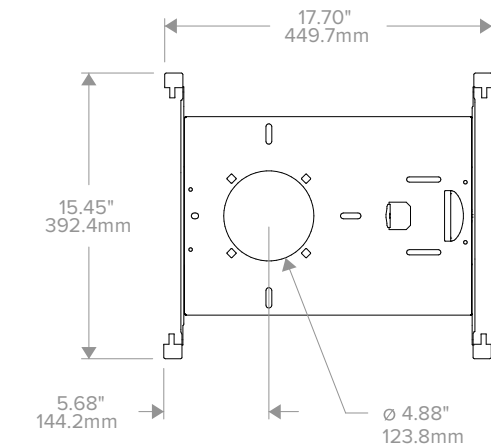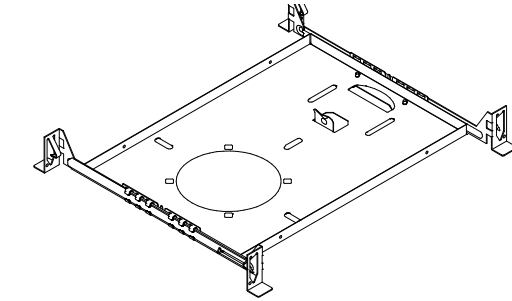


LFR-4RD-H-IC
IC HOUSING
Not for use with CP Shroud

Metal 2-piece adapter (included)
to be installed above ceiling

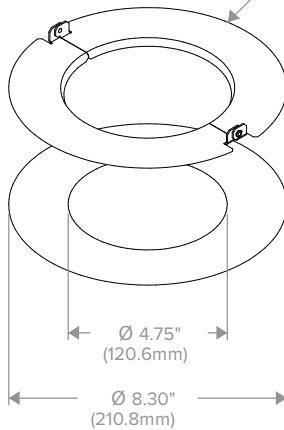

ROUND LF-MOR4-R
METAL OVERSIZED RING
(See LF-MOR Installation Instruction for more details)

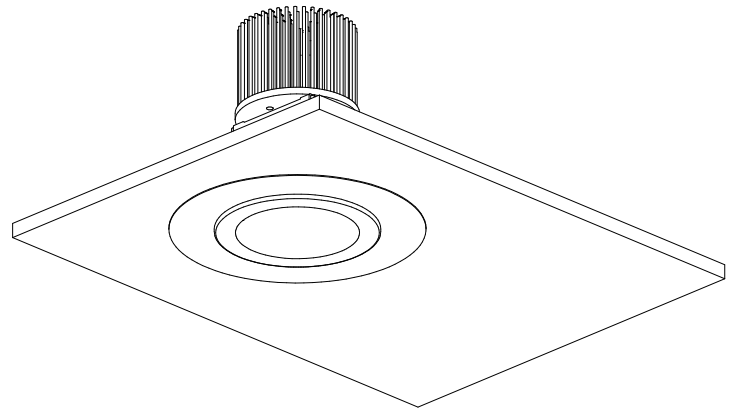

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	


PHOTOMETRY

LFR-4RW-M-20L35K8LWW-DM1 / LFR-4RW-T-LWW-S

LUMINAIRE DATA

Test No.	21.00599
Description	2000 lm, Lensed Wall Wash, 3500K, 80 CRI
Delivered Lumens	1591
Watts	15.2W
Efficacy	104
Mounting	Recessed

POLAR GRAPH

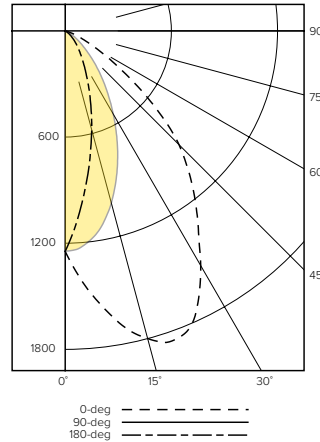

CANDELA DISTRIBUTION

Degree	Candela
0	1246
5	1466
15	1800
25	1751
35	1305
45	910
55	399
65	108
75	13
85	0
90	0

LUMINANCE DATA*

Vertical Angle	Average
45°	158737
55°	85803
65°	31521
75°	6195
85°	0

*Candela/Square Meter

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-40	1164	73.2
0-60	1549	97.4
0-90	1591	100.0
0-180	1591	100.0


LUMEN MULTIPLIER

Option	27K8	30K8	35K8	40K8	50K8	27K9	30K9	35K9	40K9	50K9
Multiplier	0.93	0.96	1.00	1.01	1.03	0.78	0.82	0.85	0.87	0.89


Photometrics are published below at a nominal 3500 Kelvin, 80+ CRI. This table may be used to approximate the lumen values at different Kelvin temperatures. Power consumption would stay the same.

TM-30 DATA

COLOR VECTOR GRAPHIC 3500K, 90 CRI

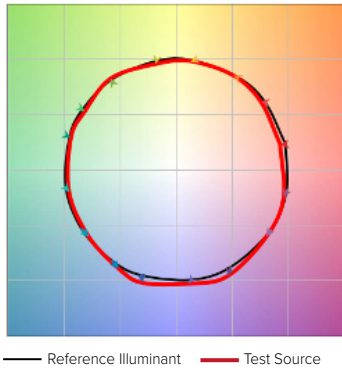


COLOR DISTORTION GRAPHIC 3500K, 90 CRI



TEST RESULTS - 3500K		
Value	80+ CRI	90+ CRI
R _t	85	90
R _g	95	99
CCT (K)	3422	3416
D _{uv}	-0.0008	-0.0019
x	0.4089	0.408
y	0.3906	0.3877
CIE R _a	85	93
CIE R _g	16	66

COLOR VECTOR GRAPHIC 3500K, 80 CRI

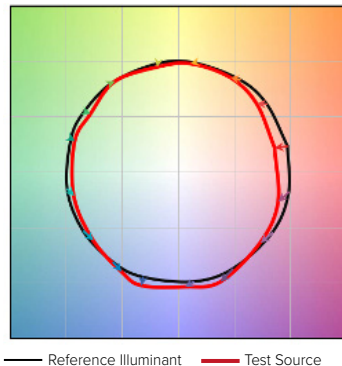

COLOR DISTORTION GRAPHIC 3500K, 80 CRI



LFR-4RW

LITEFRAME 4" ROUND LENSED WALL WASH

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

ELECTRICAL DATA

DRIVER DATA		
Input Voltage	120–277 V	347 V
Input Frequency	50/60 Hz	50/60 Hz
Power Factor	≥0.90	≥0.90
THD	<20%	<20%
EMI Filtering (FCC 47 CFR Part 15)	Class A	Class A

* Values for DM1 option shown, values for other dimming options may vary.

ADDITIONAL INFORMATION

Dimming Compatibility

For more details and recommended dimmer list, see Dimming Compatibility Information on currentlighting.com/prescolite.

DMX

See instruction sheet on currentlighting.com/prescolite for connection & installation information.

Central Inverters

For full fixture output in back-up mode, we recommend you visit currentlighting.com/dual-lite for your Central Lighting Inverter options. Please contact your local Current representative for any assistance with proper sizing and loading of your inverter selection. Central lighting inverters must be ordered separately.

Lumen Output in Emergency Mode

To determine the lumen output in emergency mode, multiply the battery pack wattage by the fixture lumens per watt (LPW). For example, 6W x 120 LPW = 720 lumens in emergency mode.