

SSAK Series Poles

SQUARE STRAIGHT ALUMINUM

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	






SPECIFICATIONS

CONSTRUCTION

- Shaft: One-piece straight aluminum with square cross section, flat sides and minimum radius on all corners; Extruded shafts of 6061-T6 aluminum in 1/8", 3/16", or 1/4" thickness. Base plate of 356 cast aluminum
- Bolt cover: Four (4) individual bolt covers provided, painted to match pole and base finish
- Pole cap: Pole shaft supplied with removable cover when applicable; Tenon and post-top configurations also available
- Hand hole: Rectangular 3x5 aluminum hand hole frame (2.38" x 4.38" opening); Mounting provisions for grounding lug located behind gasketed cover
- Anchor bolts: Four galvanized anchor bolts provided per pole with minimum yield of 55,000 psi (ASTM F1554). Galvanized hardware with two washers and two nuts per bolt for leveling
 - Anchor bolt part numbers: 3/4 x 30 x 3 — TAB-30-M38
1 x 36 x 4 — TAB-36-M38
- Super Durable polyester-TGIC powder coat finish with nominal 3.0 mil thickness. Meets or exceeds AAMA 2604 standards.

INSTALLATION

- Lighting installations for side and top mounting of luminaires with effective projected area (EPA) not exceeding maximum allowable loading of the specified pole in its installed geographic location

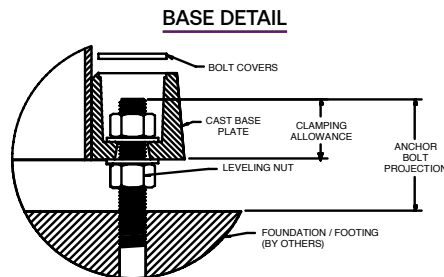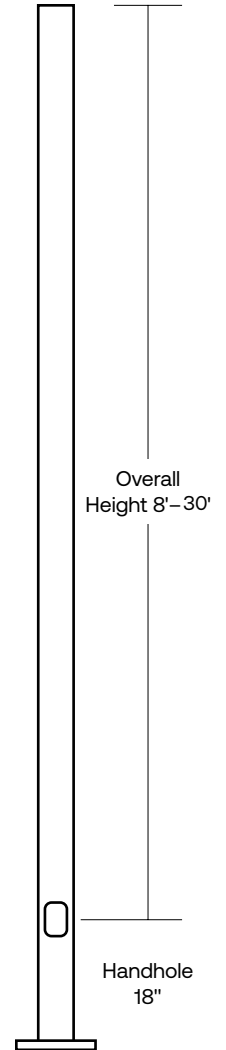

SSAK Series Poles

SQUARE STRAIGHT ALUMINUM

DATE: _____ LOCATION: _____
 TYPE: _____ PROJECT: _____
 CATALOG #: _____

ORDERING INFORMATION

Example: SSAK20-50B-2L-K2-BLT-UL

SSAK Series	Height	Shaft	Thickness	Mounting	Drill Pattern	Finish	Options
SSAK Square Straight Aluminum Pole Kim Lighting	Reference page 3 Ordering matrix	Reference page 3 Ordering matrix	Reference page 3 Ordering matrix A - .125" Wall B - .188" Wall C - .250" Wall	1 Single arm mount 2 Two fixtures at 180° 2L Two fixtures at 90° 3T Three fixtures at 90° 4 Four fixtures at 90° TA Tenon (2.38" OD x 4" Tall) OT Open Top (includes pole cap)	K1 KAR 2-Bolt (5-3/16" spacing) K2 SKAR 2-Bolt (3-1/2" spacing) K3 Sterner 2-Bolt (3" spacing) Universal Drill Pattern	BLT Black Matte Textured BLS Black Gloss Smooth DBT Dark Bronze Matte Textured DBS Dark Bronze Gloss Smooth GTT Graphite Matte Textured LGT Light Grey Matte Textured LGS Light Grey Gloss Smooth PSS Platinum Silver Smooth WHT White Matte Textured WHS White Gloss Smooth VGT Verde Green Textured Color Option CC Custom Color ²	GFI ³ 20 Amp GFCI Receptacle and Cover EHH ³ Extra Handhole C05 ³ 5" Coupling C07 ³ .75" Coupling C20 ³ 2" Coupling VM1 ⁴ Mode vibration dampener VM2 ⁵ 2nd mode vibration dampener LAB Less Anchor Bolts UL UL Certified


Accessories (Order Separately)

- VM2S08 Field-installed 2nd mode vibration dampener - 8 ft
- VM2S12 Field-installed 2nd mode vibration dampener - 12 ft
- VM2S16 Field-installed 2nd mode vibration dampener - 16 ft
- VM2S20 Field-installed 2nd mode vibration dampener - 20 ft
- VM2S25 Field-installed 2nd mode vibration dampener - 25 ft

- 1 Removable tenon used in conjunction with side arm mounting. First specify desired arm configuration followed by the "TR" notation. Example: SSAK20-50B-2L-K2-BLT-UL
- 2 Custom colors available; RAL number preferable
- 3 Specify option location using logic found on page 3 (Option Orientation)
- 4 VM1 recommended on poles 20' and taller with EPA of less than 1. VM1 is only available on 4.00" shafts.
- 5 There will be a weld witness mark on the side of the pole with the Factory installed VM2


MOUNTING ORIENTATION

○ ← Denotes handhole location

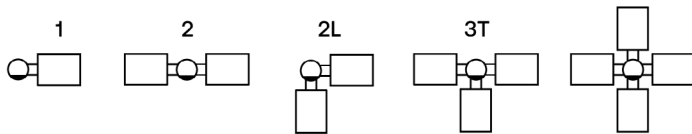

DRILL PATTERNS

UNIVERSAL DRILL PATTERN (UDP)

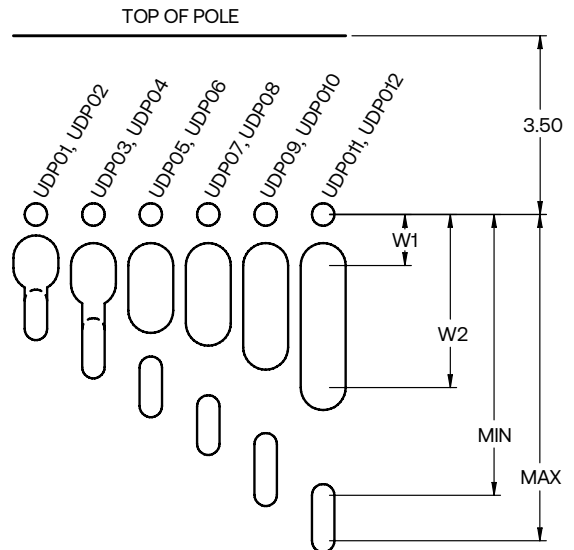

Two Bolt Mounting with Center Wireway						
Mounting Hardware	Universal Mounting Patterns					
3/16" or less	UDP01	UDP03	UDP05	UDP07	UDP09	UDP011
7/16" to 1/2"	UDP02	UDP04	UDP06	UDP08	UDP10	UDP12
"Min" Attachment Dimension	1.69	2.25	3.00	3.76	4.50	5.50
"Max" Attachment Dimension	2.24	2.99	3.75	4.49	5.49	6.00
W1 (Wireway min)	0.85	1.00	1.00	1.00	1.00	1.00
W2 (Wireway max)	1.05	1.36	1.88	2.13	2.60	3.00

DATE: _____ LOCATION: _____
 TYPE: _____ PROJECT: _____
 CATALOG #: _____

ORDERING INFORMATION (CONTINUED)

CATALOG NUMBER	HEIGHT		NOMINAL SHAFT DIMENSIONS	WALL THICKNESS	BOLT CIRCLE	BASE PLATE SIZE	ANCHOR BOLT SIZE	BOLT PROJECTION	POLE WEIGHT (LBS)
	FEET	METERS							
SSAK08-40A	8	2.4	4" Square	.125"	8.5"	9.88 x 2"	3/4 x 30 x 3"	3"	32
SSAK10-40A	10	3.0	4" Square	.125"	8.5"	9.88 x 2"	3/4 x 30 x 3"	3"	37
SSAK12-40A	12	3.7	4" Square	.125"	8.5"	9.88 x 2"	3/4 x 30 x 3"	3"	42
SSAK14-40A	14	4.3	4" Square	.125"	8.5"	9.88 x 2"	3/4 x 30 x 3"	3"	47
SSAK16-40A	16	4.9	4" Square	.125"	8.5"	9.88 x 2"	3/4 x 30 x 3"	3"	52
SSAK18-40A	18	5.5	4" Square	.125"	8.5"	9.88 x 2"	3/4 x 30 x 3"	3"	57
SSAK20-40A	20	6.1	4" Square	.125"	8.5"	9.88 x 2"	3/4 x 30 x 3"	3"	62
SSAK16-40B	16	4.9	4" Square	.188"	8.5"	9.88 x 2"	3/4 x 30 x 3"	3"	74
SSAK18-40B	18	5.5	4" Square	.188"	8.5"	9.88 x 2"	3/4 x 30 x 3"	3"	80
SSAK20-40B	20	6.1	4" Square	.188"	8.5"	9.88 x 2"	3/4 x 30 x 3"	3"	85
SSAK18-50B	18	5.5	5" Square	.188"	10.5"	11.25" x 2.5"	3/4 x 30 x 3"	3.5"	91
SSAK20-50B	20	6.1	5" Square	.188"	10.5"	11.25" x 2.5"	3/4 x 30 x 3"	3.5"	107
SSAK25-50B	25	7.6	5" Square	.188"	10.5"	11.25" x 2.5"	3/4 x 30 x 3"	3.5"	130
SSAK16-60B	16	4.9	6" Square	.188"	12"	12.75" x 2.75"	1 x 36 x 4"	3.75"	105
SSAK18-60B	18	5.5	6" Square	.188"	12"	12.75" x 2.75"	1 x 36 x 4"	3.75"	130
SSAK20-60B	20	6.1	6" Square	.188"	12"	12.75" x 2.75"	1 x 36 x 4"	3.75"	155
SSAK25-60B	25	7.6	6" Square	.188"	12"	12.75" x 2.75"	1 x 36 x 4"	3.75"	180
SSAK30-60B	30	9.1	6" Square	.188"	12"	12.75" x 2.75"	1 x 36 x 4"	3.75"	210
SSAK16-60C	16	4.9	6" Square	.250"	12"	12.75" x 2.75"	1 x 36 x 4"	3.75"	121
SSAK18-60C	18	5.5	6" Square	.250"	12"	12.75" x 2.75"	1 x 36 x 4"	3.75"	144
SSAK20-60C	20	6.1	6" Square	.250"	12"	12.75" x 2.75"	1 x 36 x 4"	3.75"	166
SSAK25-60C	25	7.6	6" Square	.250"	12"	12.75" x 2.75"	1 x 36 x 4"	3.75"	224
SSAK30-60C	30	9.1	6" Square	.250"	12"	12.75" x 2.75"	1 x 36 x 4"	3.75"	258


- Notes:**
- Factory supplied template must be used when setting anchor bolts. Current will deny any claim for incorrect anchorage placement resulting from failure to use factory supplied template and anchor bolts.
 - For more information about pole vibration and vibration dampeners, please consult factory.
 - Unwrap poles immediately upon receipt to avoid condensation build up and possible corrosion.
 - † There will be a weld witness mark on the side of the pole with the Factory installed VM2.

<p>EHH Extra handhole</p> <p>Provision for Grounding</p>	<p>C05 / C07 / C20 Coupling</p> <p>2" -11.5 NPSC Threads 3/4" - 14 NPSC Threads 1/2" - 14 NPSC Threads</p>	<p>VM1 1st mode vibration dampener</p> <p>Field Installed Pole Top dampener designed to reduce pole top deflection or sway. VM1 is recommended for pole systems 25' and taller with a total EPA of 1.0 or less. Only available on 4.00" shafts</p>	<p>VM2¹ 2nd mode vibration dampener</p> <p>Factory installed, internal dampener designed to alter pole resonance to reduce movement and material fatigue caused by 2nd mode vibration.</p>	<p>VM2SXX Field-installed 2nd mode vibration dampener</p> <p>VM2S08 - 8' VM2S12 - 12' VM2S16 - 16' VM2S20 - 20' VM2S24 - 24'</p> <p>Field installed, internal dampener designed to alter pole resonance to reduce movement and material fatigue caused by 2nd mode vibration.</p>
<p>GFI 20 Amp GFCI Receptacle & Cover</p>		<p>Option Orientation</p> <p>Follow the logic below when ordering location specific options. For each option, include its orientation (in degrees) and its height (in feet).</p> <p>Example: Option C05 should be ordered as: SSAK20-40A-TA-DBT-C05-0-15 (.5" coupling on the handhole side of pole, 15' up from the pole base) † spacing required between option. Consult factory for other configurations.</p>		


DATE: _____ LOCATION: _____
 TYPE: _____ PROJECT: _____
 CATALOG #: _____

WIND MAPS


ASCE7-05 WIND MAP

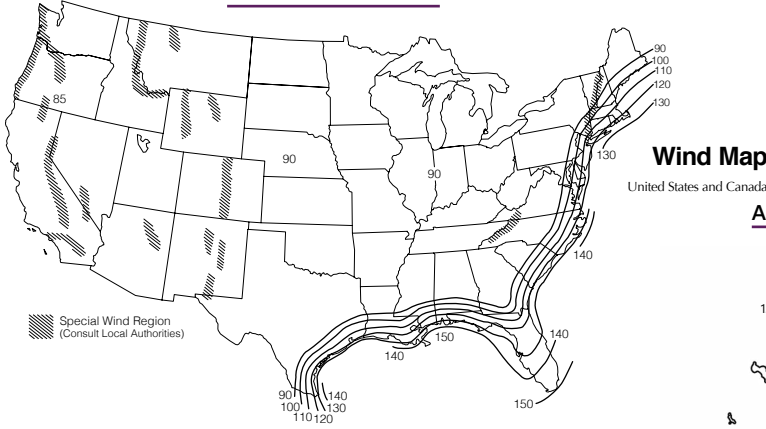

FLORIDA REGION WIND MAP

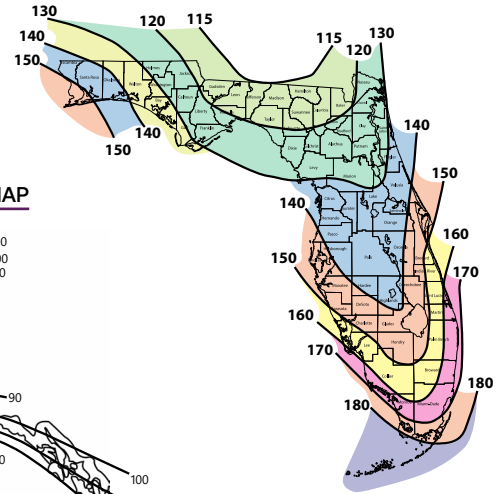

ALASKA REGION WIND MAP

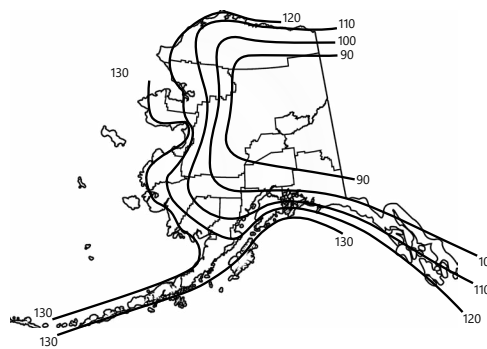

HAWAII – 105 mph
PUERTO RICO – 145 mph

*Printed with permission from ASCE

Florida region wind map above is based upon 3-second gust winds and the 2017 Florida Building Code.

ASCE 7-05 wind map EPA Load Rating - 3 second gust wind speeds
(Use for all locations except Florida)

Catalog Number	85	90	100	105	110	120	130	140	145	150
SSAK08-40A	17.3	15.2	12.0	10.7	9.6	7.7	6.2	5.0	4.5	4.0
SSAK10-40A	12.6	11.0	8.4	7.4	6.5	4.9	3.7	2.8	2.4	2.0
SSAK12-40A	9.3	7.9	5.8	4.9	4.2	2.9	1.9	1.1	0.8	0.5
SSAK14-40A	6.7	5.6	3.8	3.0	2.4	1.3	NR	NR	NR	NR
SSAK16-40A	4.7	3.7	2.1	1.4	0.9	NR	NR	NR	NR	NR
SSAK18-40A	2.9	2.1	0.6	NR	NR	NR	NR	NR	NR	NR
SSAK20-40A	1.4	0.6	NR	NR	NR	NR	NR	NR	NR	NR
SSAK16-40B	9.2	7.7	5.4	4.5	3.7	2.3	1.2	NR	NR	NR
SSAK18-40B	6.8	5.6	3.6	2.7	2.0	0.8	NR	NR	NR	NR
SSAK20-40B	4.8	3.7	1.9	1.2	0.6	NR	NR	NR	NR	NR
SSAK18-50B	12.9	10.9	7.6	6.3	5.1	3.2	1.7	0.5	NR	NR
SSAK20-50B	9.8	8.1	5.2	4.0	3.0	1.3	NR	NR	NR	NR
SSAK25-50B	4.0	2.7	0.5	NR	NR	NR	NR	NR	NR	NR
SSAK16-60B	25.0	22.3	16.9	14.7	12.7	9.6	7.0	5.0	4.2	3.4
SSAK18-60B	20.7	17.7	13.0	11.0	9.3	6.5	4.3	2.6	1.8	1.1
SSAK20-60B	16.4	13.8	9.6	7.9	6.4	3.9	2.0	NR	NR	NR
SSAK25-60B	8.3	6.3	3.1	1.8	0.7	NR	NR	NR	NR	NR
SSAK30-60B	2.5	0.8	NR	NR	NR	NR	NR	NR	NR	NR
SSAK16-60C	25.0	25	24.5	21.5	19.0	14.9	11.6	9.0	7.9	6.8
SSAK18-60C	25.0	25	19.5	17.1	14.9	11.2	8.3	6.0	5.1	4.2
SSAK20-60C	24.2	20.9	15.4	13.2	11.2	8.0	5.5	3.5	2.6	1.8
SSAK25-60C	14.2	11.6	7.5	5.8	4.3	1.9	NR	NR	NR	NR
SSAK30-60C	7.1	5	1.7	NR	NR	NR	NR	NR	NR	NR

Florida Building Code 2017 EPA Load Rating - 3 second gust wind speeds
(Use for Florida only)

Catalog Number	115	120	130	140	150	160	170	180
SSAK08-40A	14.8	13.4	11.0	9.1	7.6	6.3	5.3	4.4
SSAK10-40A	10.9	9.8	7.9	6.3	5.1	4.1	3.2	2.5
SSAK12-40A	7.9	7.0	5.4	4.1	3.0	2.2	1.5	0.9
SSAK14-40A	5.6	4.8	3.4	2.3	1.4	0.6	NR	NR
SSAK16-40A	3.6	2.9	1.7	0.7	NR	NR	NR	NR
SSAK18-40A	1.8	1.2	NR	NR	NR	NR	NR	NR
SSAK20-40A	NR	NR	NR	NR	NR	NR	NR	NR
SSAK16-40B	7.7	6.7	4.9	3.5	2.4	1.5	0.7	NR
SSAK18-40B	5.4	4.5	3.0	1.8	0.8	NR	NR	NR
SSAK20-40B	3.5	2.7	1.3	NR	NR	NR	NR	NR
SSAK18-50B	10.6	9.2	6.8	4.9	3.3	2.0	1.0	NR
SSAK20-50B	7.8	6.5	4.4	2.7	1.3	NR	NR	NR
SSAK25-50B	2.2	1.2	NR	NR	NR	NR	NR	NR
SSAK16-60B	22.0	19.6	15.5	12.4	9.8	7.7	5.9	4.4
SSAK18-60B	17.2	15.2	11.7	8.9	6.6	4.8	3.3	2.0
SSAK20-60B	13.4	11.5	8.4	6.4	4.0	2.4	1.0	NR
SSAK25-60B	5.7	4.4	2.0	NR	NR	NR	NR	NR
SSAK30-60B	NR	NR	NR	NR	NR	NR	NR	NR
SSAK16-60C	25.0	25.0	22.8	18.6	15.2	12.5	10.1	8.2
SSAK18-60C	25.0	22.5	18.0	14.3	11.3	9.0	7.0	5.3
SSAK20-60C	20.4	18.0	14.0	10.8	8.2	6.0	4.3	2.8
SSAK25-60C	11.2	9.3	6.2	3.8	1.8	NR	NR	NR
SSAK30-60C	4.3	2.9	NR	NR	NR	NR	NR	NR

SSAK Series Poles

SQUARE STRAIGHT ALUMINUM

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

NOTES

Wind-speed Website disclaimer:

Current has no connection to the linked website and makes no representations as to its accuracy. While the information presented on this third party website provides a useful starting point for analyzing wind conditions, Current has not verified any of the information on this third party website and assumes no responsibility or liability for its accuracy. The material presented in the windspeed website should not be used or relied upon for any specific application without competent examination and verification of its accuracy, suitability and applicability by engineers or other licensed professionals. Current does not intend that the use of this information replace the sound judgment of such competent professionals, having experience and knowledge in the field of practice, nor to substitute for the standard of care required of such professionals in interpreting and applying the results of the windspeed report provided by this website. Users of the information from this third party website assume all liability arising from such use. Use of the output of these referenced websites do not imply approval by the governing building code bodies responsible for building code approval and interpretation for the building site described by latitude/longitude location in the windspeed report. <http://windspeed.atcouncil.org>

- Allowable EPA, to determine max pole loading weight, multiply allowable EPA by 30 lbs.
- The tables for allowable pole EPA are based on the ASCE 7-05 Wind Map or the Florida Region Wind Map for the 2010 Florida Building Code. The Wind Maps are intended only as a general guide and cannot be used in conjunction with other maps. Always consult local authorities to determine maximum wind velocities, gusting and unique wind conditions for each specific application
- Allowable pole EPA for jobsite wind conditions must be equal to or greater than the total EPA for fixtures, arms, and accessories to be assembled to the pole. Responsibility lies with the specifier for correct pole selection. Installation of poles without luminaires or attachment of any unauthorized accessories to poles is discouraged and shall void the manufacturer's warranty
- Wind speeds and listed EPAs are for ground mounted installations. Poles mounted on structures (such as bridges and buildings) must consider vibration and coefficient of height factors beyond this general guide; Consult local and federal standards
- Wind Induced Vibration brought on by steady, unidirectional winds and other unpredictable aerodynamic forces are not included in wind velocity ratings. Consult Current Lighting's Pole Vibration Application Guide for environmental risk factors and design considerations.
- Extreme Wind Events like, Hurricanes, Typhoons, Cyclones, or Tornadoes may expose poles to flying debris, wind shear or other detrimental effects not included in wind velocity ratings